


PROPRIETARY NOTICE
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.


| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 06/02/17 | J.YOU |
| | | | |
| | | | |




"J1"
FEMALE DVI-I
CONNECTOR

2X #4-40 HEX
JACK SCREW
(REMOVABLE)

PIN 1

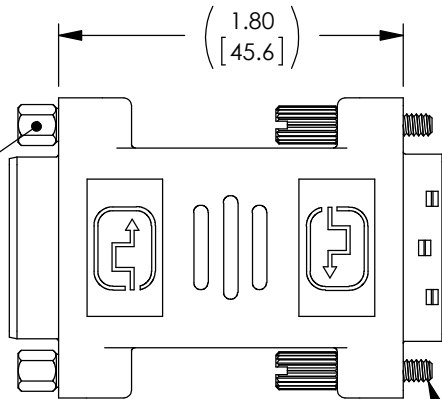


2X 4-40 UNC-2A
THUMBSCREW

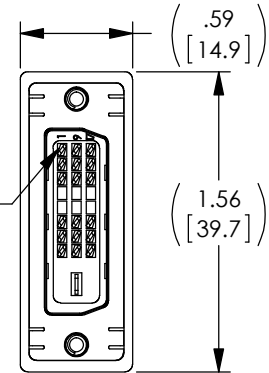

PIN 1

"P1"
MALE DVI-D
SINGLE LINK
CONNECTOR



(.190)
[4.8]

(2x .150)
[3.8]

MOLDED HOOD,
PVC, LIGHT GRAY
(PANTONE 400C)
WITH 360° FOIL SHIELDING

| WIRING TABLE | | | |
|--------------|------|-------|-------|
| "J1" | "P1" | "J1" | "P1" |
| 1 | 1 | 15 | 15 |
| 2 | 2 | 16 | 16 |
| 3 | 3 | 17 | 17 |
| 6 | 6 | 18 | 18 |
| 7 | 7 | 19 | 19 |
| 9 | 9 | 22 | 22 |
| 10 | 10 | 23 | 23 |
| 11 | 11 | 24 | 24 |
| 14 | 14 | SHELL | SHELL |

NOTES:

- ADAPTOR IS SHIPPED WITH DUST COVERS ASSEMBLED (NOT SHOWN).
- ADAPTOR SHALL BE TESTED FOR CONTINUITY.
- ADAPTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

NON CONTROLLED DRAWING IF PRINTED

| AS9100C CERTIFIED | | | CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY | | | | |
|-------------------|-----------|---------|---|--|----------------------------------|---|--|
| DASH | NEXT ASSY | USED ON | UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES | SIGNATURE | DATE | MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086 | |
| | | | OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [13] | DRAWN BY: J.YOU CHECKED BY: Brian G. APPROVED ENGINEERING: S.PAN APPROVED MANUFACTURING: | 06/02/17 06/02/17 06/02/17 | | TITLE ADAPTER DVI-D MALE/DVI-I FEMALE SIZE A |
| | | | CUSTOMER REFERENCE DOCUMENT: | CUSTOMER APPROVAL | CAGE CODE: 42977 | DRAWING NUMBER: MDC00003 | |
| APPLICATION | | | | | | SCALE: NTS | SHEET 1 OF 1 |