


REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/20/2018	BPUCHASKI

REVISIONS

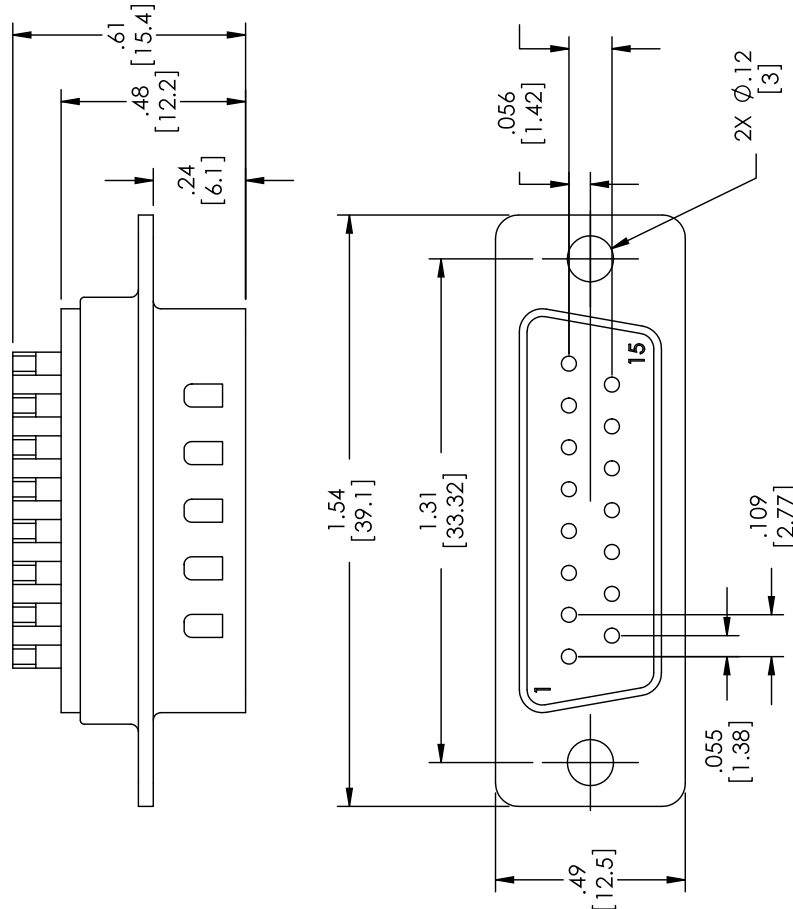

CATALOG #	PACKAGING
DSB00032	1/BAG
DSB00013	70/TRAY

- NOTES:**
- MATERIAL:** CONNECTOR SHELL: STEEL  
CONNECTOR INSULATOR: THERMOPLASTIC, UL94V-0 RATED  
CONTACTS: COPPER ALLOY
  - FINISH:** FRONT SHELL: NICKEL PLATED  
BACK SHELL: TIN PLATED  
CONTACTS: GOLD FLASH IN CONTACT AREA OVER NICKEL PLATE  
SOLDER CUPS: TIN PLATED
  - ELECTRICAL:** DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC rms  
INSULATION RESISTANCE: 5000MΩ @ 500VDC
  - MISCELLANEOUS:** OPERATING TEMPERATURE: -55°C TO +105°C  
CONNECTOR SHALL BE PACKAGED IN ACCORDANCE WITH MILESTEK SPEC. PS-0054. (SEE CHART)

		MILESTEK CORPORATION 301 EDWARDS BLVD. SUITE 100 BOSTON, MA 02128 PHONE: (949) 484-9400 FAX: (949) 564-1047	
DRAWN BY: BPUCHASKI CHECKED BY: DFRIBELLO APPROVED BY: BGATES		SIGNATURE DATE: 12/11/2018 12/17/2018 12/14/2018	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: $>10$ [254] $\pm .1$ [2.54] $>10$ [254] $\pm .01$ [0.254] $>10$ [254] $\pm .001$ [0.0254] $>120$ [3048] $\pm .001$ [0.0254]		TITLE SOLDER CUP D-SUB CONNECTOR DB15 MALE	
ALL OTHER DIMENSIONAL TOLERANCES: .XXX = ±.005 [0.127] .XX = ±.001 [0.0254]		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
CUSTOMER REFERENCE DOCUMENT:		CAGE CODE: 4Z977	
SEE		DRAWING NUMBER: DSB00032	
SCALE: NTS		SHEET 1 OF 1	

PROPRIETARY NOTICE  
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right, title, or interest in the design, structure, or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.