
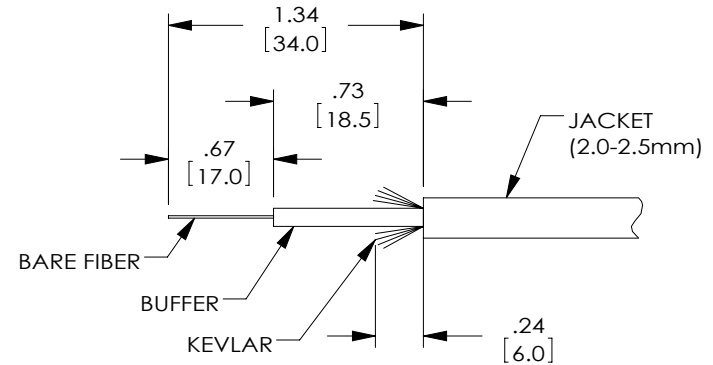
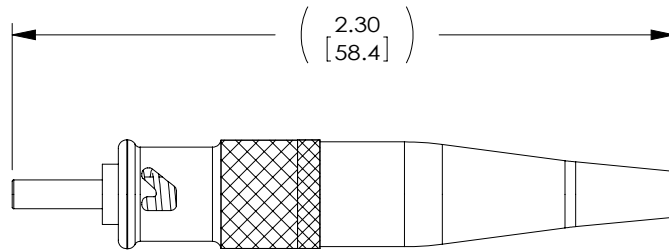


# PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/07/17	G.HUAN

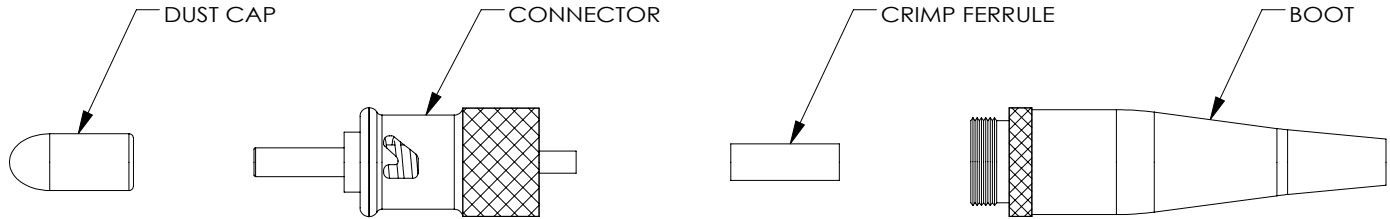

## RECOMMENDED STRIPPING DIMENSIONS

### NOTES:

MATERIAL: STAINLESS STEEL.

CONNECTOR ASSEMBLY POLISH TYPE: PC.

MODEL IS NON-LOCKING STYLE, SINGLE MODE.


STRIP FIBER CABLE TO MIL-STD-2042-5B. STRIP DIMENSIONS ARE +/- 1mm.

DUST CAP IS INSTALLED FOR SHIPMENT.

COMPONENTS COME UNASSEMBLED AND SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.

REGULATORY COMPLIANCE:  
CE2011/65/EU(RoHS DIRECTIVE)

## NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE	<div> MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086</div>
			OVERALL CABLE LENGTH TOLERANCE: 512 [305] = +1 [25] / -0 >12 [305] 560 [1524] = +2 [51] / -0 >60 [1524] 5120 [3048] = +4 [102] / -0 >120 [3048] <300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	DRAWN BY: G.HUAN	06/07/17	
			ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] XX = ± .02 [1.51] XXX = ± .002 [1.3]	CHECKED BY: Dustin G.	06/07/17	
				APPROVED ENGINEERING: S.PAN	06/07/17	
				APPROVED MANUFACTURING:		
				CUSTOMER APPROVAL		TITLE MIL ST SM NON-LOCK SST 2MM
						SIZE A
						DRAWING NUMBER: FYB00006
DASH	NEXT ASSY	USED ON	CUSTOMER REFERENCE DOCUMENT:	CAGE CODE: 42977	SCALE: NTS	SHEET 1 OF 1
APPLICATION						

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES  
OVERALL CABLE LENGTH TOLERANCE:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤60 [1524] = +2 [51] / -0  
>60 [1524] ≤120 [3048] = +4 [102] / -0  
>120 [3048] ≤300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0%  
ALL OTHER DIMENSIONAL TOLERANCES:  
.X = ±.2 [5.08]  
.XX = ±.02 [1.51]  
.XXX = ±.005 [1.3]

CUSTOMER REFERENCE DOCUMENT: