
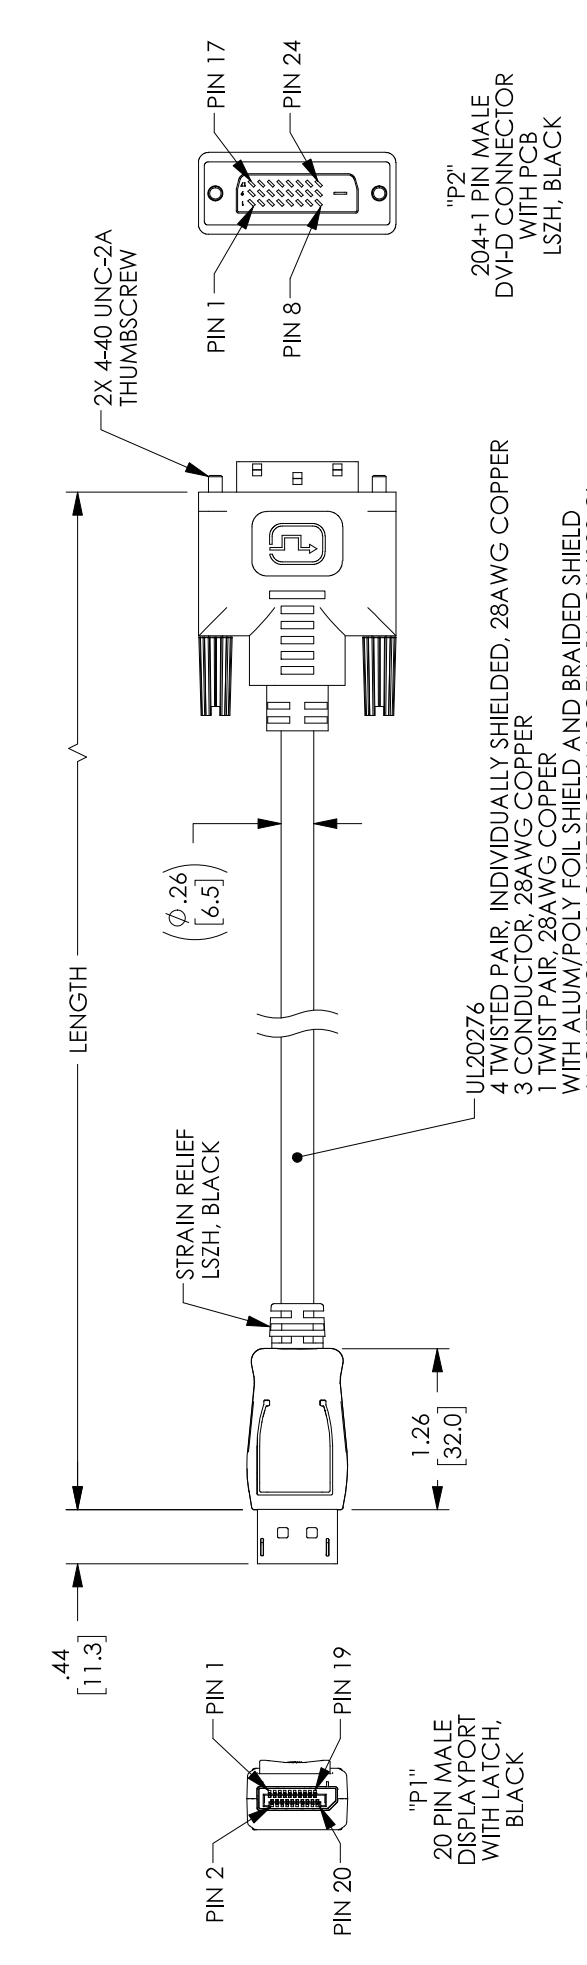


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any rights in the product or information contained therein, or any part thereof, to any person, except by written permission from or written agreement with MilesTek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/15/18	B.PUCHASHKI
			



NOTES:

ELECTRICAL PROPERTIES:


VOLTAGE TEST: DC 300V
 INSULATION RESISTANCE: 10.0M OHM MIN
 CONDUCTIVE RESISTANCE: 2.0 OHM MAX

MISCELLANEOUS:

INSIDE MOLDED P2 END MUST USE COPPER FOIL AND SOLDER BRAID 360 DEGREE TO THE SHELL
 CABLE ASSEMBLY SHALL BE UL CERTIFIED
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

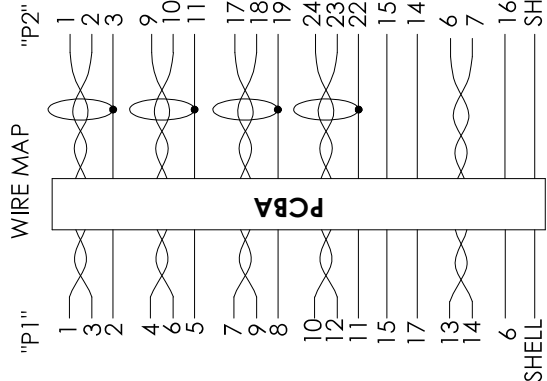

MODEL NUMBER	LENGTH
MDIA00001-1	1 FEET [.30]
MDIA00001-3	3 FEET [.91]
MDIA00001-5	5 FEET [1.52]
MDIA00001-10	10 FEET [3.05]
MDIA00001-15	15 FEET [4.57]

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SIGNATURE	DATE
OVERALL LENGTH TOLERANCE		B.PUCHASHKI	05/08/18
>12 (505) 560 (1524) = ±.01 (.25) / ±.01		CHECKED BY:	
>120 (3048) 5320 (13512) = ±.01 (.25) / ±.01		J.JARBY	05/08/18
>300 (7620) = ±.02 (.51) / ±.02		APPROVED BY:	
		B.C.GATES	05/08/18
ALL OTHER DIMENSIONAL TOLERANCES:		APPROVED MANUFACTURING:	
.X ± .01 (.25)		CUSTOMER APPROVAL	
.XX ± .005 (.13)			
CUSTOMER REFERENCE DOCUMENT:		CAGE CODE: 42977	
DASH	NEXT ASSY	USED ON	APPLICATION
MilesTek logo		TITLE	
MILESTEK CORPORATION 301 ROCKVALE DRIVE, SUITE 100 ROCKVALE, IL 60154 PHONE: (940) 484-9400 FAX: (940) 364-0407		CA DVITO DP LSZH	
SHEET 1 OF 1		DRAWING NUMBER:	
		MDIA00001	