
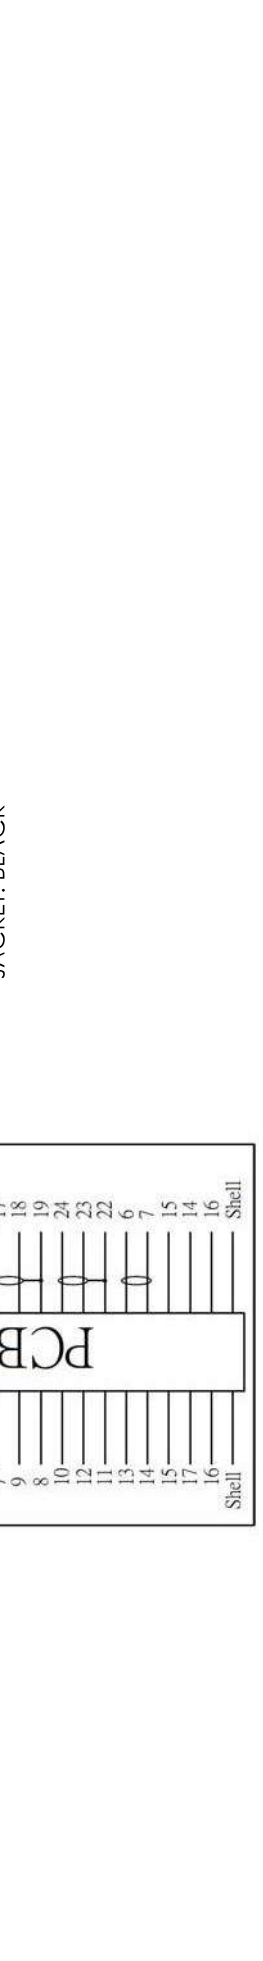
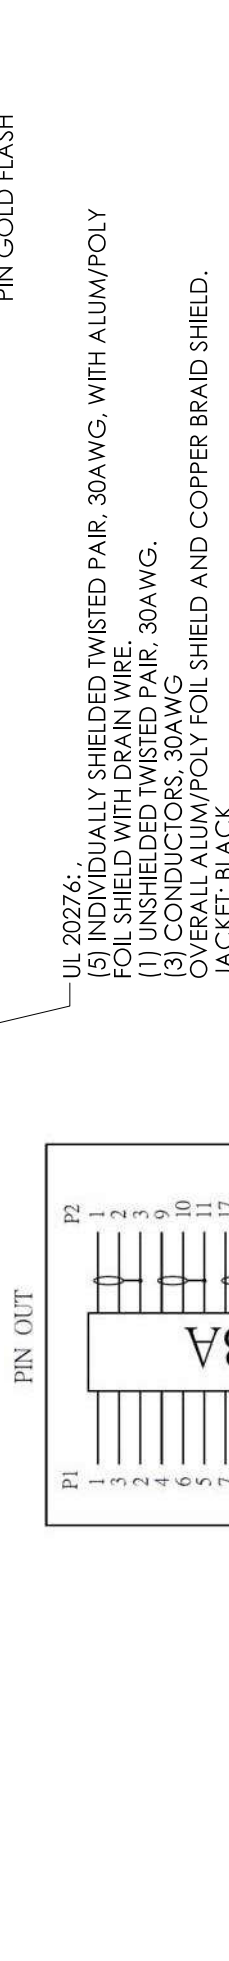


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REV		DESCRIPTION		DATE		APPROVED	
A		INITIAL RELEASE		6/2/17		R.CLARK	
B		ECN 8970: REVISED DESCRIPTION FROM DVI TO DISPLAYPORT		11/15/17		D.FRISIELLO	

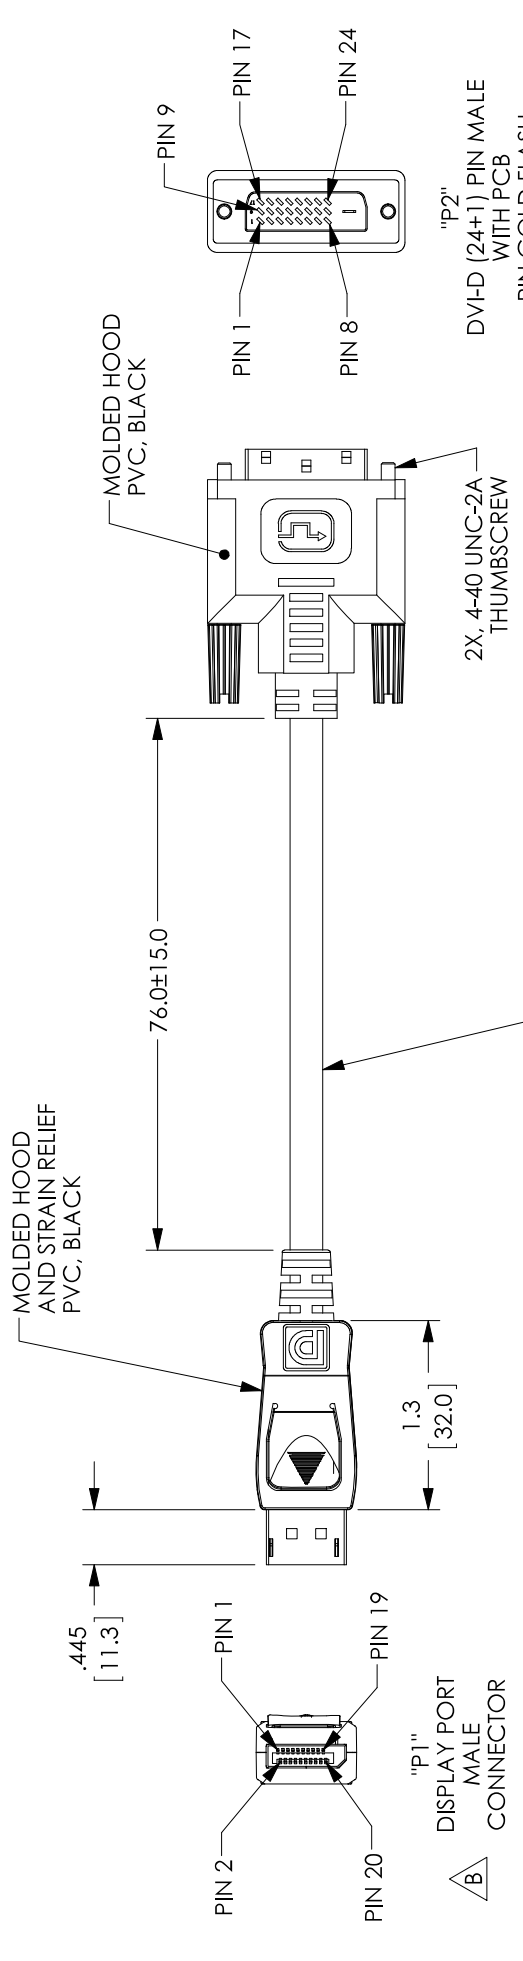

APPROVALS		DATE	
DRAWN BY R.CLARK		6/2/17	
CHECKED BY B.GATES		6/2/17	
APPROVED BY B.GATES		6/2/17	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	
OVERALL CABLE LENGTH TOLERANCE:	
≤12 [305] = +1 [25] / -0	
>12 [305] ≤60 [1524] = +2 [51] / -0	
>60 [1524] ≤120 [3048] = +4 [102] / -0	
>120 [3048] ≤300 [7620] = +5% / -0%	
ALL OTHER DIMENSIONAL TOLERANCES:	
.X = ±.2 [5.08]	
.XX = ±.02 [51]	
.XXX = ±.005 [127]	

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
COLOR VARIATIONS MAY OCCUR	

PROJECTION	
------------	--

REV.	B
DWG. NO.	DPC00003
SCALE:	NONE
GAD FILE:	DPC00003.SLDDRW
SHEET 1 OF 1	

NOTES:

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- VOLTAGE TEST: DC 300V 10ms
INSULATION RESISTANCE: 10.0 M ohm/MIN.
CONDUCTANCE RESISTANCE: 2.0 ohm/MAX.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE 2011/65/EU (RoHS DIRECTIVE)