



PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the invention or any part thereof, or any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from or written agreement with MilesTek Corporation and its subsidiaries.

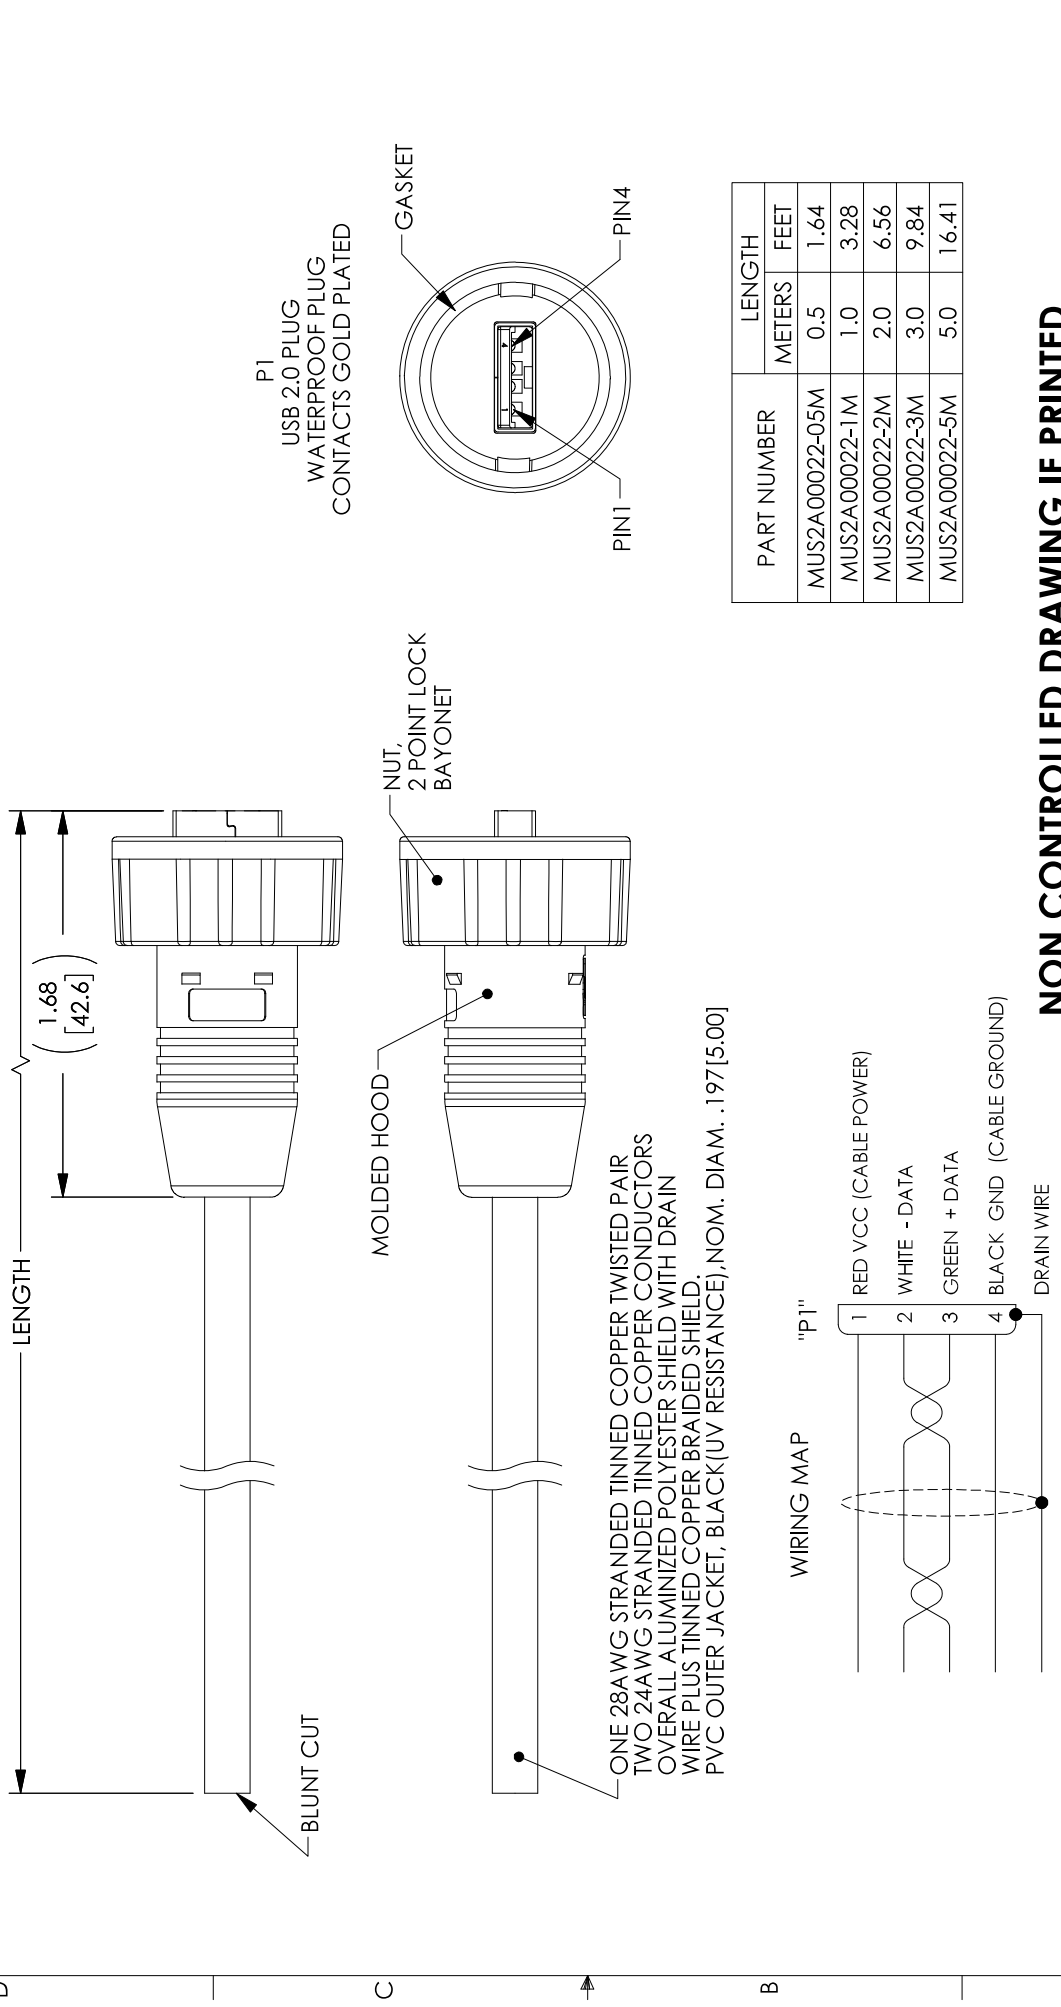

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
 TWO 24AWG STRANDED TINNED COPPER CONDUCTORS
 OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN
 WIRE PLUS TINNED COPPER BRAIDED SHIELD.
 PVC OUTER JACKET, BLACK(UV RESISTANCE), NOM. DIAM. .197 [5.00]

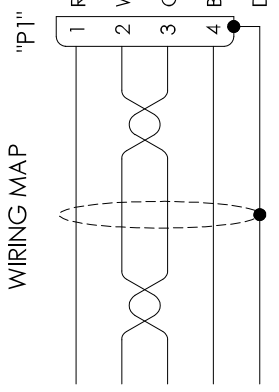

PART NUMBER	LENGTH	
	METERS	FEET
MUS2A00022-05M	0.5	1.64
MUS2A00022-1M	1.0	3.28
MUS2A00022-2M	2.0	6.56
MUS2A00022-3M	3.0	9.84
MUS2A00022-5M	5.0	16.41

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/9/18	D.FRIBELLO

- NOTES:**
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
 - WATERPROOF RATE: IP67
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.
- REGULATORY COMPLIANCE:**
 CE2011/65/EU(RoHS DIRECTIVE)

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY

SIGNATURE		DATE	
DRAWN BY: D.FRIBELLO		5/8/18	
CHECKED BY: E.LAMOTT		5/9/18	TITLE USB 2.0 A M/M THREADED WATERPROOF
APPROVED BY: B.CATES		5/9/18	
APPROVED MANUFACTURING:			SEE DRAWING NUMBER:
CUSTOMER APPROVAL			A MUS2A00022

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
 >12 (305) TO 1524] = +.01 / -.0
 >120 (3048) TO 3300 (7620) = +.01 (25) / -.0
 >300 (7620) = +.03 / -.02
 ALL OTHER DIMENSIONAL TOLERANCES:
 .X = ± .002 (13)
 .XX = ± .003 (13)
 .XXX = ± .005 (13)

CUSTOMER REFERENCE DOCUMENT:

DASH	NEXT ASSY	USED ON	APPLICATION

CAGE CODE: 42977

SCALE: NTS

SHEET 1 OF 1