
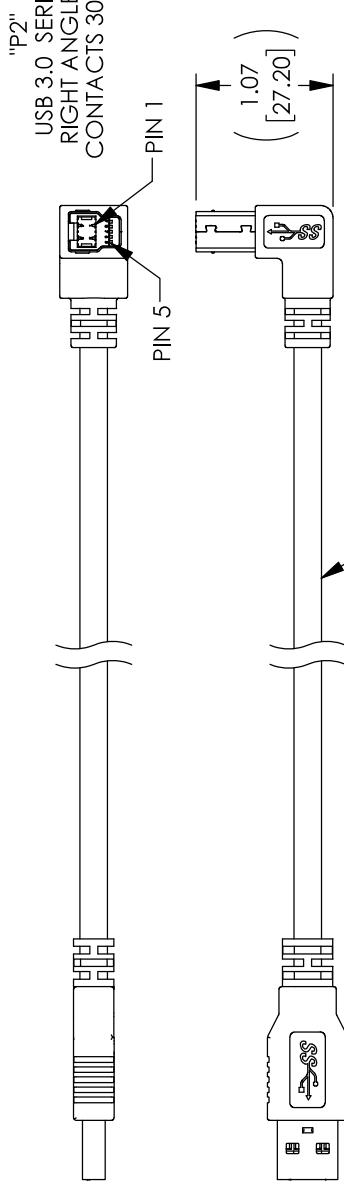


8 7 6 5 4 3 2 1

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the invention or any part thereof, or any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/9/18	D.FRIBELLO

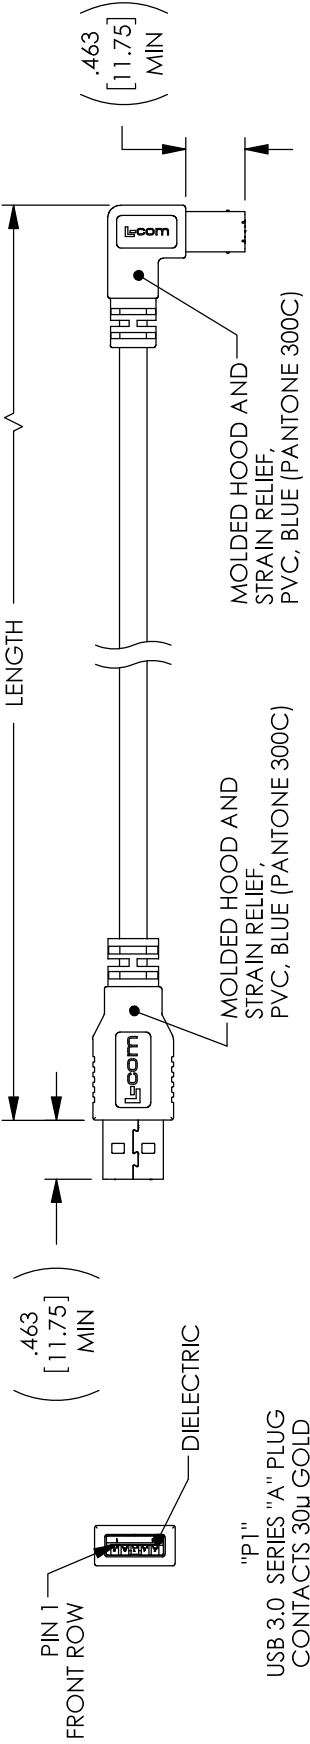

PART NUMBER	LENGTH METERS [FEET]
MUS3A00029-03M	0.3 [.98]
MUS3A00029-05M	0.5 [1.64]
MUS3A00029-1M	1.0 [3.28]
MUS3A00029-2M	2.0 [6.56]
MUS3A00029-3M	3.0 [9.84]

UL STYLE 20276,  
 (2) TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE,  
 (1) UNSHIELDED TWISTED PAIR, 30AWG,  
 (2) CONDUCTORS, 24AWG,  
 OVERALL ALUMINUM/MYLAR AND BRAIDED SHIELD, JACKET: PVC, BLUE (PANTONE 300C)  
 (NOM DIA. .217" [5.5], MIN BEND RAD 2.17" [55])

NON CONTROLLED DRAWING IF PRINTED

NOTES:

- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:

CE2011/65/EU(ROHS DIRECTIVE)

SIGNATURE		DATE	MILESTEK CORPORATION	
DESIGNED BY:	D.FRIBELLO	5/8/18	301 BOWLING GREEN, SUITE 100	
CHECKED BY:	EJAMOTT	5/9/18	PHONE: (940) 484-9400	
APPROVED BY:	B.CATES	5/9/18	FAX: (940) 364-0487	
APPROVED MANUFACTURING:				
CUSTOMER APPROVAL				
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES			MilesTek	
OVERALL CABLE LENGTH TOLERANCE			USB 3.0 STR A/B 90 RA R CABLE	
>12 (305) 560 (1524) = +.01 / -.01				
>120 (3048) 5300 (17620) = +.01 (25) / -.01				
>300 (7620) = +.03% / -.02%				
ALL OTHER DIMENSIONAL TOLERANCES:			SHEET	
.X = ± .01 (254)			DRAWING NUMBER:	
.XX = ± .005 (127)			MUS3A00029	
.XXX = ± .003 (76.2)			SCALE: NTS	
CUSTOMER REFERENCE DOCUMENT:			CAGE CODE: 42977	
DASH	NEXT ASSY	USED ON	APPLICATION	

8 7 6 5 4 3 2 1