


PROPRIETARY NOTICE
 This document discloses confidential subject matter in which MiletTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any license or right to reproduce, copy, or disseminate the information contained herein, or any part thereof, in any form or by any means, without the prior written permission of MiletTek Corporation. Any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MiletTek Corporation and its subsidiaries.

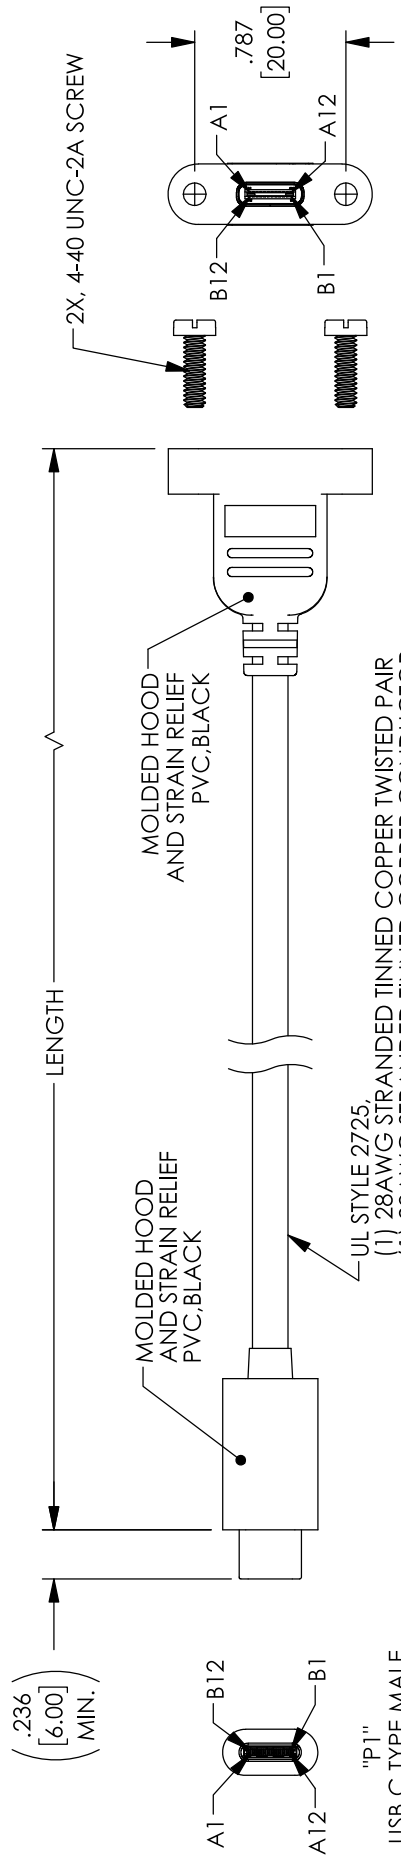

"P1"
 USB C TYPE MALE
 GOLD PLATED CONTACTS

MOLDED HOOD AND STRAIN RELIEF PVC, BLACK


LENGTH

MOLDED HOOD AND STRAIN RELIEF PVC, BLACK

UL STYLE 2725,
 (1) 28AWG STRANDED TINNED COPPER TWISTED PAIR
 (1) 28AWG STRANDED TINNED COPPER CONDUCTOR
 (2) 24AWG STRANDED TINNED COPPER CONDUCTORS
 OVERALL ALUMINUM/POLYESTER SHIELD WITH DRAIN WIRE PLUS TINNED COPPER BRAID SHIELD
 JACKET: PVC, BLACK (NOM DIA. .185" [4.70])

"J1"
 USB C TYPE FEMALE
 GOLD PLATED CONTACTS

WIRING DIAGRAM

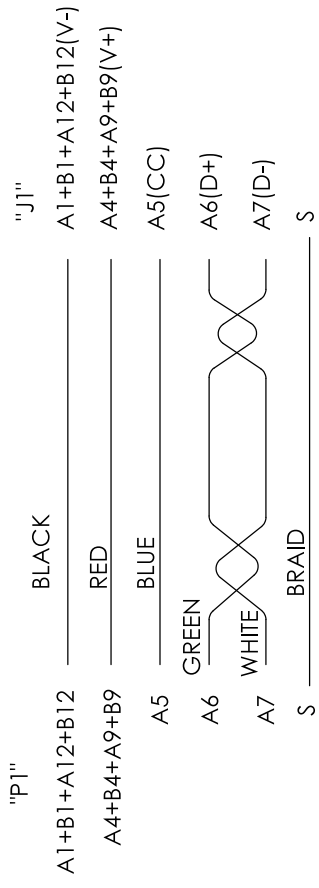

NOTES

- ELECTRICAL:
 VOLTAGE TEST: DC 300V, 10ms
 INSULATION RESISTANCE: 10.0M Ω, MIN
 CONDUCTANCE RESISTANCE: 5.0 Ω, MAX.
- MOUNTING HARDWARE INCLUDED: 2X #4-40 SCREW
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:
 CE2011/65/EU (ROHS DIRECTIVE)

MODEL NUMBER	LENGTH		
	METERS	FEET	TOL. (IN)
MUS3A00043-03M	0.3	0.98	+/- 1.18
MUS3A00043-05M	0.5	1.64	+/- 1.18
MUS3A00043-1M	1.0	3.28	+/- 1.18
MUS3A00043-2M	2.0	6.56	+/- 1.97
MUS3A00043-3M	3.0	9.84	+/- 1.97

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/16/18	B.PUCHASKI

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
SIGNATURE	DATE	MILESTEK CORPORATION 301 ROCKVALE DRIVE, SUITE 100 PHOENIX, AZ 85028 PHONE: (949) 484-4400 FAX: (949) 564-1047	
DRAWN BY: B.PUCHASKI	05/09/18	MilesTek The Power of Customization	
CHECKED BY: J.JARBOY	05/09/18		
APPROVED BY: B.GATES	05/09/18	TITLE	CA USB-C PNL/USB-CM
APPROVED MANUFACTURING:		SHEET	DRAWING NUMBER: MUS3A00043
CUSTOMER APPROVAL		SCALE: NTS	SHEET 1 OF 1
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		CAGE CODE: 42977	
OVERALL CABLE LENGTH TOLERANCE: >12 (305) 560 (1424) = +.01 (-.00) >120 (3048) 5320 (13620) = +.01 (-.00) >300 (7620) = +.03% / -.0%			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .010 (0.254) .XX = ± .005 (0.127) .XXX = ± .003 (0.076)			
CUSTOMER REFERENCE DOCUMENT:			
DASH	NEXT ASSY	USED ON	APPLICATION