



REV A		REV B	
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	6/28/18	DFRISIELLO
MUS3A00045			

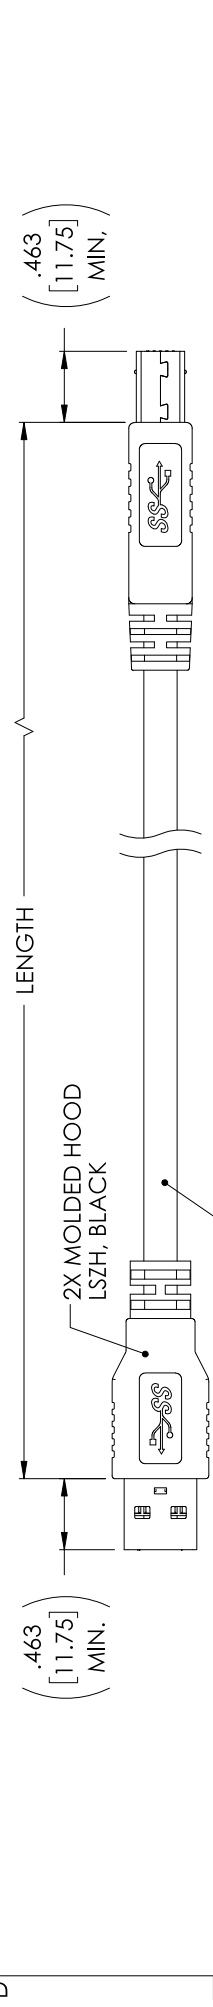

UL STYLE 21551, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65% JACKET: LSZH, BLACK

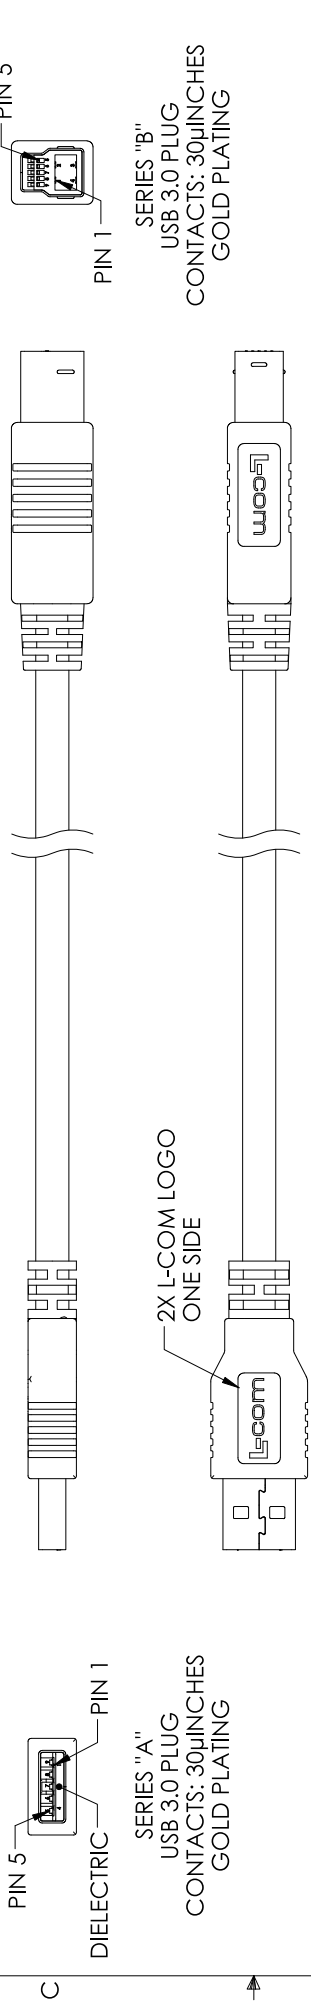

"P1" WIRING MAP

1	RED	"P2"	1
2	WHITE		2
3	GREEN		3
4	BLACK		4
5	BLUE		5
6	YELLOW		6
7	DRAIN WIRE		7
8	DRAIN WIRE		8
9	PURPLE		9
	ORANGE		
	BRAID		SHELL

MODEL NUMBER	LENGTH METERS	LENGTH FEET
MUS3A00045-03M	0.3	[.98]
MUS3A00045-05M	0.5	[1.64]
MUS3A00045-1M	1.0	[3.28]
MUS3A00045-2M	2.0	[6.56]
MUS3A00045-3M	3.0	[9.84]

**NON CONTROLLED DRAWING IF PRINTED**

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE: DFRISIELLO DATE: 6/28/18
OVERALL CABLE LENGTH TOLERANCE: >12" (305) 560 (1524) = +.01 (-.01) / -0 >120" (3048) 3200 (7620) = +.01 (-.02) / -0 >300" (7620) = +.03% / -.03%	CHECKED BY: BGATES DATE: 6/28/18
ALL OTHER DIMENSIONAL TOLERANCES: X = ± .010 (0.254) XX = ± .005 (0.127) XXX = ± .003 (0.0762)	APPROVED MANUFACTURING: BGATES DATE: 6/28/18
CUSTOMER REFERENCE DOCUMENT:	CUSTOMER APPROVAL:
DASH: NEXT ASSY: USED ON:	TITLE: CBL USB 3.0 A/B LSZH
APPLICATION:	SHEET: A
	DRAWING NUMBER: MUS3A00045
	SCALE: NTS
	CAGE CODE: 42977
	SHEET 1 OF 1

- NOTES:**
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  - CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
  - CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
  - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)