




PROPRIETARY NOTICE


This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/23/18	D.FRISIELLO

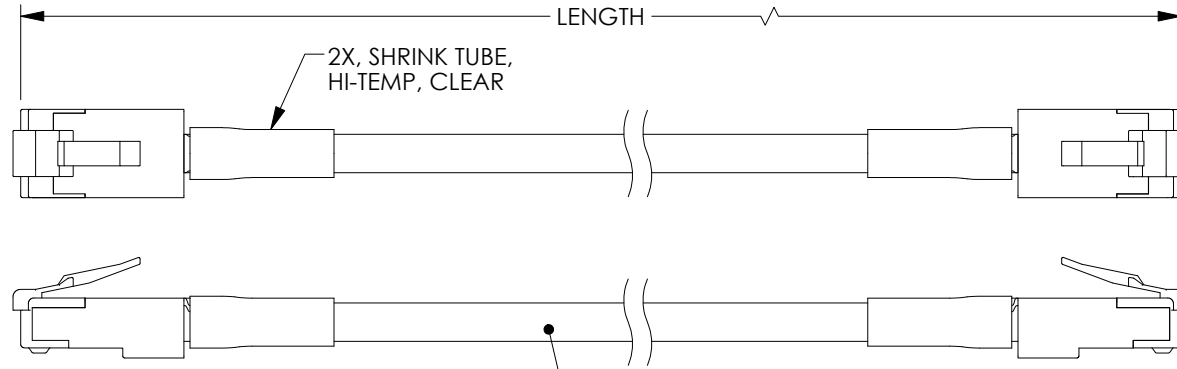

MODEL NUMBER	LENGTH FEET [METERS]
T5A00017-1F	1.0 [.30]
T5A00017-2F	2.0 [.61]
T5A00017-3F	3.0 [.91]
T5A00017-5F	5.0 [1.52]
T5A00017-10F	10.0 [3.05]
T5A00017-15F	15.0 [4.57]
T5A00017-25F	25.0 [7.62]
T5A00017-50F	50.0 [15.24]
T5A00017-75F	75.0 [22.86]
T5A00017-100F	100.0 [30.48]
T5A00017-125F	125.0 [38.10]
T5A00017-150F	150.0 [45.72]
T5A00017-175F	175.0 [53.34]
T5A00017-200F	200.0 [60.96]

4TP, CAT 5e, 26AWG STRANDED SILVER PLATED COPPER WITH ALUM/POLY FOIL SHIELD AND ROUND TINNED PLATED COPPER BRAID, (85% MIN. COVERAGE).  
 JACKET: FEP, BLUE  
 OPERATING TEMPERATURE RANGE: -55 °C TO +150 °C  
 NOM. DIA: .205 [5.21], MIN. BEND RAD: 1.0" [25.4]

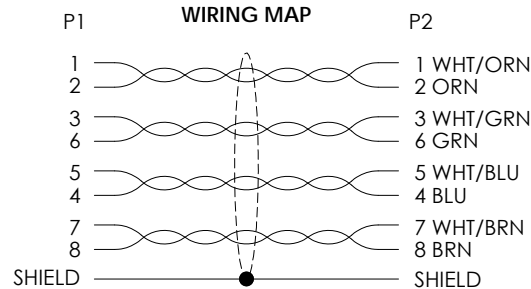

NOTES:

- FIRE PROPERTIES: (FST)  
 MEETS OR EXCEEDS THE APPLICABLE REQUIREMENTS OF FAR 25.869, FAR 25.853, ABD0031, AND D6-51377.
- LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
  - PLUG CONFORMS TO TIA-1096.
  - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK PACKAGING SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:  
 CE2011/65/EU(RoHS DIRECTIVE)

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES			SIGNATURE	DATE	MilesTek	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%			DRAWN BY: D.FRISIELLO	2/22/18	MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]			CHECKED BY: D.GUITADAURO	2/23/18	TITLE C5e SF/UTP 26STR FEP BLU + 150° SLIM	
CUSTOMER REFERENCE DOCUMENT:			APPROVED ENGINEERING: D.GUITADAURO	2/23/18	DRAWING NUMBER: T5A00017	
DASH	NEXT ASSY	USED ON	CUSTOMER APPROVAL	SCALE: NTS		
APPLICATION			CAGE CODE: 42977	SHEET 1 OF 1		