


PROPRIETARY NOTICE
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.


REV	REVISIONS		
	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/18/17	G.HUAN
B	ECN 8899: REVISE DESCR, TITLE, ADD DETAIL, REMOVE NOTE 2	8/29/17	D.FRISIELLO

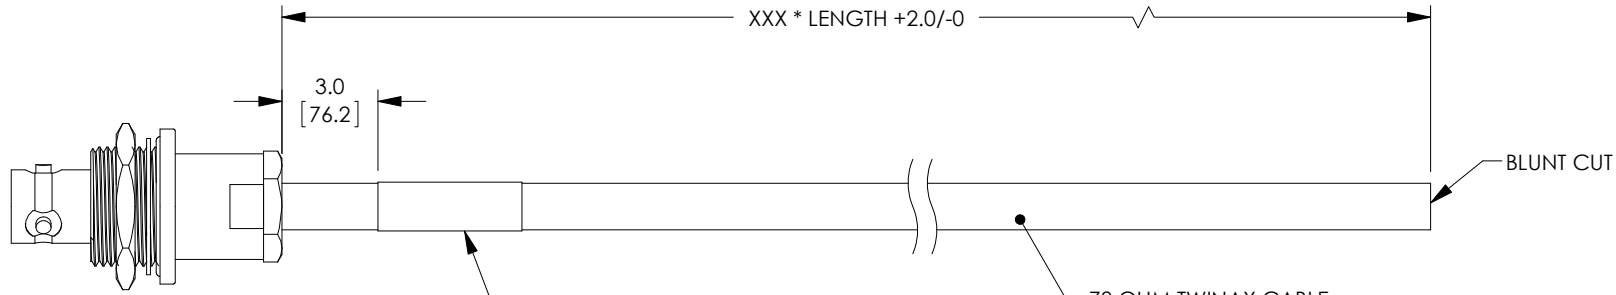


TRB 3-LUG JACK
 INSULATED
 BULKHEAD

LABEL INFORMATION
 MSA00402-XXXX
 4Z977
 DATE CODE

78 OHM TWINAX CABLE
 JACKET: HALOGEN FREE POLYOLEFIN, BLUE
 NOM. DIA: .242" [6.15]
 OPER. TEMP: -30°C TO +80°C



LENGTH CODE CHART		
CABLE # & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART # USED
MSA00402-XXN	WHERE XXX = LENGTH IN INCHES	MSA00402-12N (12.0 INCHES)

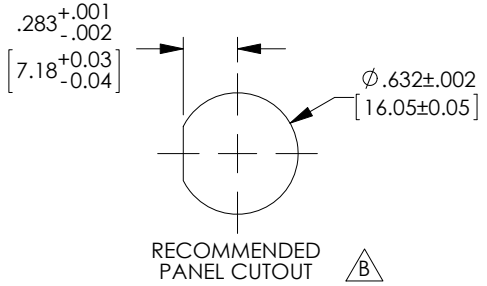

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY				
DASH	NEXT ASSY	USED ON	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE		MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086
			OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]	DRAWN BY: G.HUAN 07/18/17 CHECKED BY: M.HEARN 07/19/17 APPROVED ENGINEERING: M.HEARN 07/19/17 APPROVED MANUFACTURING:			
			CUSTOMER REFERENCE DOCUMENT:	CUSTOMER APPROVAL		CA HF TWNX IN BH J-BLNT	
			APPLICATION	CAGE CODE: 4Z977		SIZE A	DRAWING NUMBER: MSA00402-XXXX
						SCALE: NTS	SHEET 1 OF 1

- NOTES:**
- *XXX = LENGTH IN INCHES
 - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.