
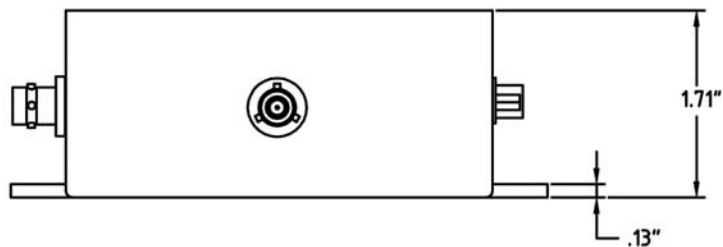
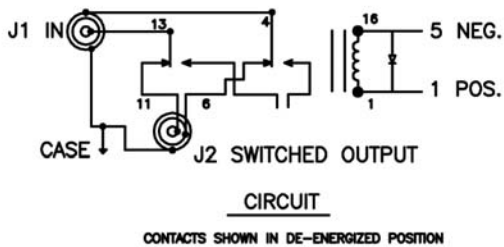


STUB SWITCHING RELAYS

| PART NUMBER | DESCRIPTION |
|-------------|--|
| 90 50270 | Stub Switching by Control Voltage 28 VDC |
| 90 50271 | Stub Switching by Control Voltage 5 VDC |

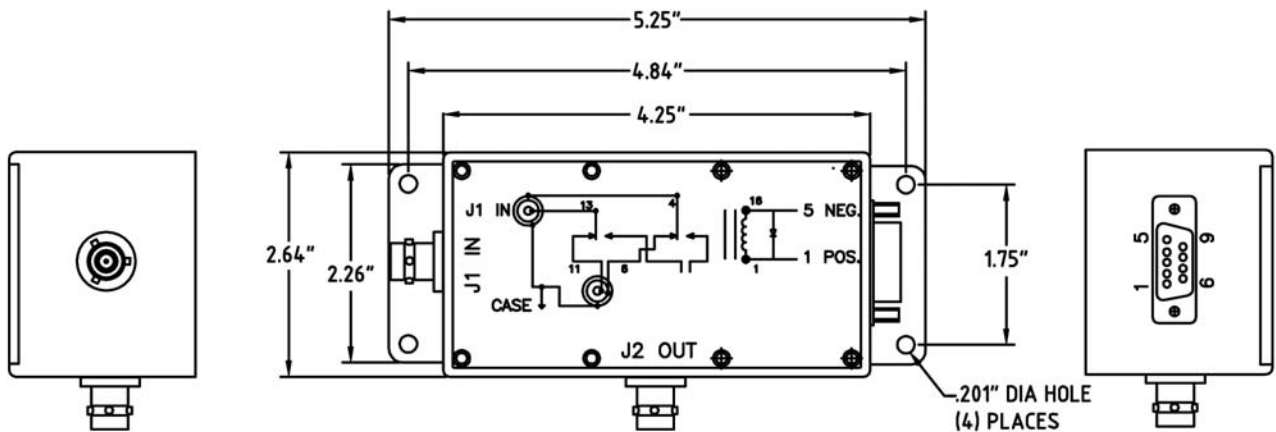

1.0 ELECTRICAL RELAY SPECIFICATIONS:

| | |
|-------------------------------|-------------------------|
| 1.1 NOMINAL VOLTAGE | AS NOTED ABOVE |
| 1.2 NOMINAL OPERATION CURRENT | 7.5 mA (+/- 10%) |
| 1.3 COIL RESISTANCE—Ohm | 3,200 (+/- 10%) |
| 1.4 NOMINAL UNIT WEIGHT | 10.1 OUNCES (286 GRAMS) |

2.0 MECHANICAL SPECIFICATIONS:

- HOUSING: DIE CAST A380 ALUMINUM ALLOY. CLEAR ANODIZED AND PAINTED WITH TEXTURE. BAKED ENAMEL, COLOR BLUE.
- COVER PLATE: 5052-H32 ALUMINUM, SATIN FINISH.
- CONNECTOR 10-06592 OR EQUIVALENT

3.0 ENVIRONMENTAL:

- OPERATING TEMPERATURE -40 C TO + 70 C

MilestTek®

MILESTEK CORPORATION
1506 INTERSTATE 35 WEST
DENTON, TX 76207
PHONE: 866.524.1553
FAX: 940.591.7086

PLEASE VISIT www.milestek1553.com FOR ADDITIONAL INFORMATION

| | | |
|--------------------------|----------------------------------|---------------|
| DRAWN BY: MIKE GREENHILL | APPROVED BY: ROBERT PEREZ | DATE 08/07/09 |
| TITLE: RELAYS | CAGE CODE: 42977 | |
| DRAWING NO: 95270271 | ISO 9001: 2008 CERTIFIED | REV: |
| SCALE: NOT TO SCALE | TOLERANCE: <.1+/.1 .01/>.1+/- .1 | SHEET: 1 OF 1 |