


REVISIONS		
ISS	DESCRIPTION\DATE	
A04	噴字內容加訂單號碼\09/02/16"	

RoHS COMPLIANT

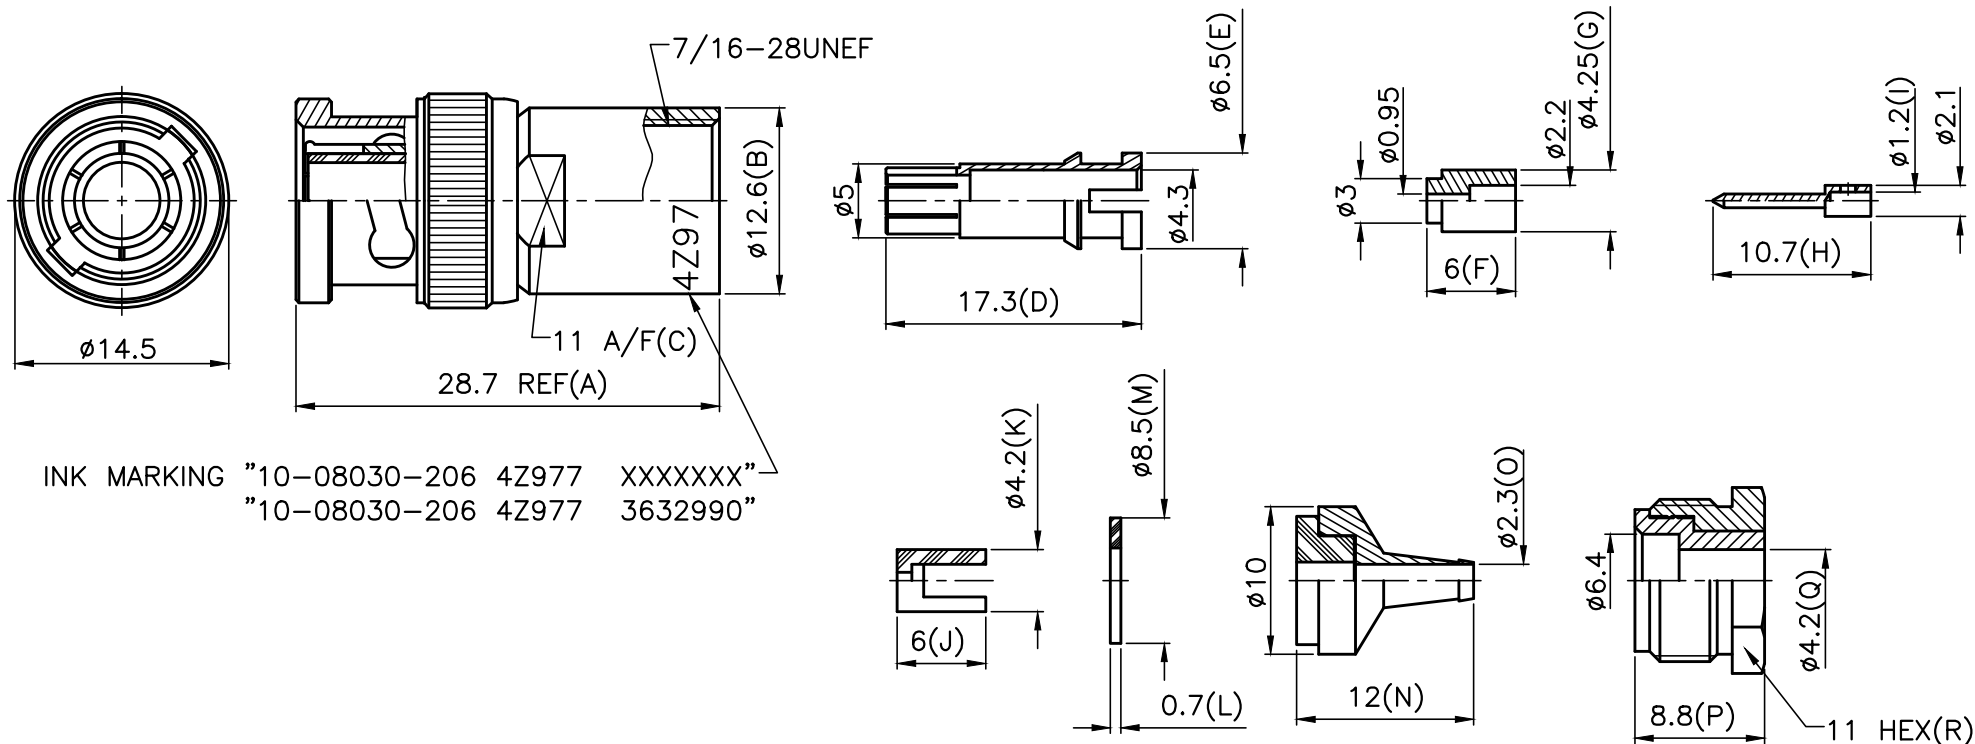

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 100~300 THICK OVER COPPER PL 80~150 THICK
3. GOLD PL 3~10 THICK OVER NICKEL PL 100~300 THICK OVER COPPER PL 80~150 THICK
4. PVC
5. PHOSPHOR BRONZE PER QQ-B-750
6. GOLD PL 30~40 THICK OVER NICKEL PL 100~300 THICK OVER COPPER PL 80~150 THICK

NUT	NOTE 1	NOTE 2
BRAID HOLDER	NOTE 1	NOTE 2
BRAID HOLDER	NOTE 1	NOTE 2
INSULATOR	PTFE	WHITE
WASHER	NPTE 4	RED
INSULATOR	PTFE	WHITE
CONTACT PIN	NOTE 1	NOTE 6
INSULATOR	PTFE	WHITE
BODY	NOTE 5	NOTE 3
SHELL	NOTE 1	NOTE 2
GASKET	SILICONE	RED
WASHER	SS41	NOTE 2
SPRING	SK5	NOTE 2
WASHER	SS41	NOTE 2
INSULATOR	PTFE	WHITE
BODY	NOTE 1	NOTE 2
NO. DESCRIPTION	MATERIAL	FINISH



得新電子股份有限公司
Dersing Electronics Co., Ltd.

APRD: Johnson

CHKD: 力英豪

DR: 力英豪

UNLESS OTHERWISE
SPECIFIED TOLERANCES
0.5-6 = ±0.2
>6-30 = ±0.4
>30-120 = ±0.6
>120-315 = ±1
>315-1000 = ±1.6
ANGLES = ±5°

TITLE: TRB MALE-2 SLOT

PART NO: 10-08030-206

DRAWING NO: 67015-002-A04

DATE: 09/02/16"

SHEET: .

UNIT: mm

SCALE: 2/1

ISO 9001 certificate