


RECOMMENDED CABLE STRIPPING DIMENSIONS

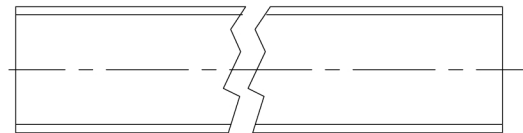

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

| | | | | | | | | |
|---|-------------|-------------|---------|---|-------------------------|------|---|---|
| 8 | | | | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm | SIGNATURE | DATE | MilesTek | MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086 |
| 7 | | | | | | | | |
| 6 | | | | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" | CHECKED BY: | | PART DISCRPTION: MINI 75 OHM SMB PLUG RIGHT ANGLE CRIMP RG179 & RG187 | |
| 5 | | | | | APPROVED ENGINEERING: | | | |
| 4 | | | | DRAWING NUMBER: 11-MSMB101.PDF | APPROVED MANUFACTURING: | | SIZE D | PART NUMBER: 11-MSMB101 |
| 3 | INSULATOR | TEFLON | NATURAL | | CAGE CODE: 4Z977 | | REV.-A | DO NOT SCALE DRAWING |
| 2 | CONTACT PIN | BER. COPPER | GOLD | | | | | |
| 1 | BODY | BRASS | GOLD | | | | | |
| | DESCRIPTION | MATERIAL | FINISH | | | | | |