


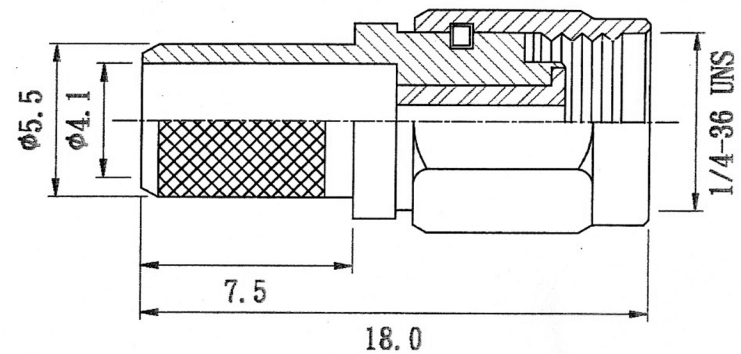

1. CRIMPED CONTACT
HEX CRIMP SIZE: .068"
2. CRIMPED FERRULE
HEX CRIMP SIZE: .256"

8				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	SIGNATURE	DATE	MilesTek MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086				
7											
6					DRAWN BY: M. GREENHILL	10/01/2010					
5					CHECKED BY:						
4					APPROVED ENGINEERING:						
3	INSULATOR	TEFLON	WHITE	DRAWING NUMBER: 11-SMA009.PDF	CAGE CODE: 4Z977		PART DISCRIPTION: SMA MALE, CRIMP ATTACHMENT FOR RG59 & RG62 SIZE D PART NUMBER: 11-SMA009				
2	CONTACT PIN	BRASS	GOLD							APPROVED MANUFACTURING:	
1	BODY	BRASS	NICKEL								
	DESCRIPTION	MATERIAL	FINISH				REV.-A	DO NOT SCALE DRAWING	SHEET 1 OF 1		