

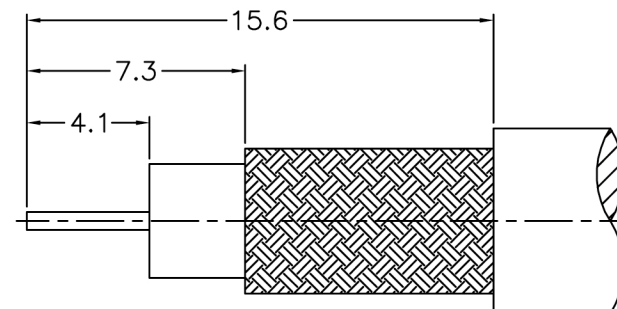


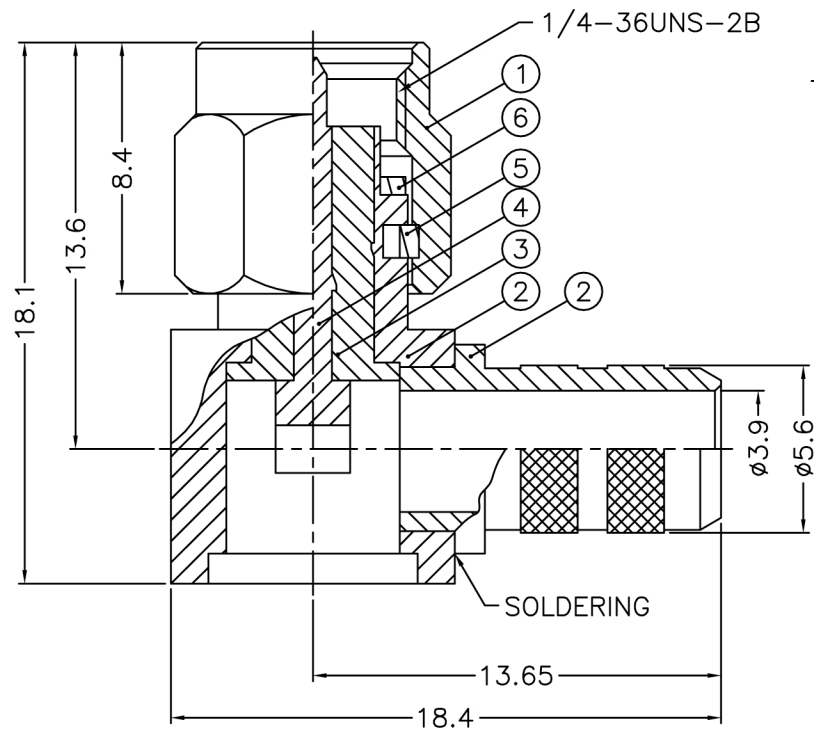


RECOMMENDED
CABLE STRIPPING DIM'S

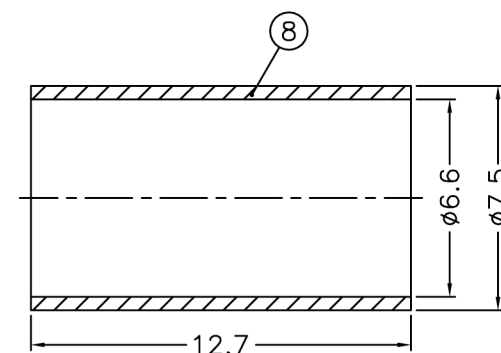

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS
2. THIN GOLD THICK OVER NICKEL PL. 50 MIN. THICK OVER
COPPER PL. 50 MIN. THICK
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
4. TEFLON



8				DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4	SIGNATURE DRAWN BY: M. GREENHILL CHECKED BY: APPROVED ENGINEERING: APPROVED MANUFACTURING:	DATE 10/01/2010	MilesTek MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086	PART DISCRIPTION: SMA MALE, RIGHT ANGLE, CRIMP ATTACHMENT FOR RG59 & RG62
7								
6								
5								
4								
3	INSULATOR	TEFLON	NATURAL	DRAWING NUMBER: 11-SMA106.PDF	CAGE CODE: 4Z977	SIZE D	PART NUMBER: 11-SMA106	REV.-A DO NOT SCALE DRAWING SHEET 1 OF 1
2	CONTACT PIN	BRASS	GOLD					
1	BODY	BRASS	NICKEL					
	DESCRIPTION	MATERIAL	FINISH					