
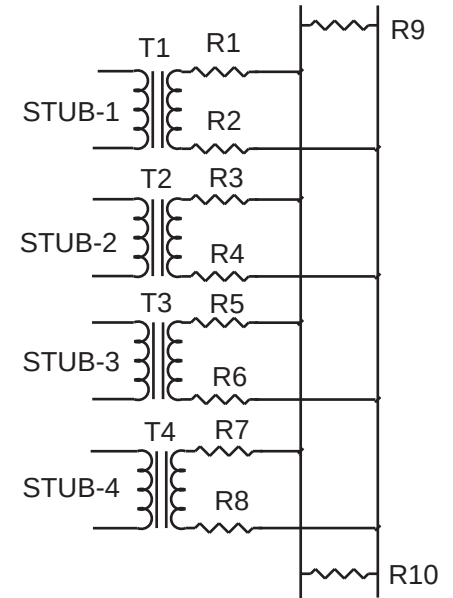
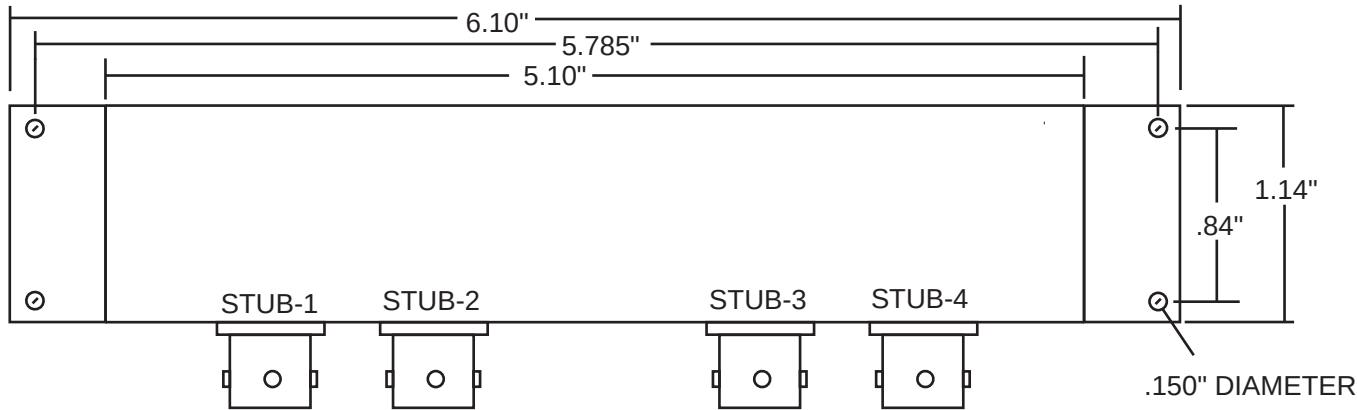
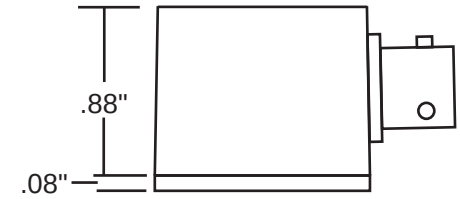


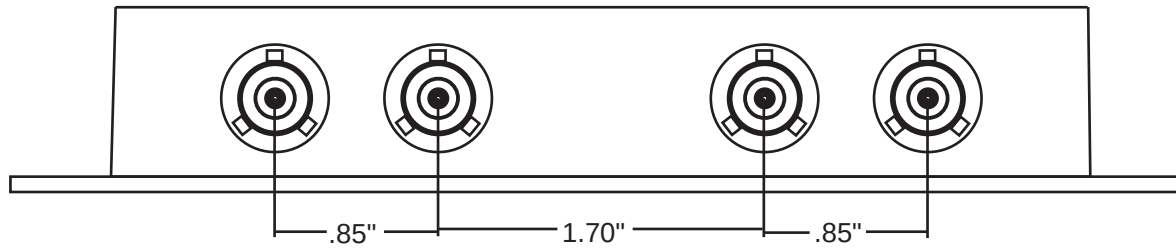

HOUSING: DIE CAST ALUMINUM, ALLOY A360
 WITH BAKED BLUE ENAMEL FINISH
 PER FED-STD-595, COLOR 25109
 COVER: ALUMINUM ALLOY 1100-H14 WITH
 CLEAR ALODINE PER MIL-A-8625.
 SHAPE: 1 DEGREE DRAFT PER SIDE.

90-50224	1.41:1	59 ohm, 2W, 1	78.7 ohm, 2W, 1	78.7 ohm, 2W, 1	3-LUG TRB MILESTEK 10-06593 OR EQUIV	3-LUG TRB PLUG MILESTEK 10-06030-XXX OR EQUIV	 1506 I-35 W DENTON TX 76207 USA 1-800-958-5173 940-484-9400 www.milestek.com militarysales@milestek.com	DRAWN BY: CHRIS RIEMER		DATE:		
90-50554	1:1	59 ohm, 2W, 1	78.7 ohm, 2W, 1	78.7 ohm, 2W, 1				APPROVED BY: MARK HEARN		9/11/2012		
90-50654	1:1	54.9 ohm, 2W, 1	78.7 ohm, 2W, 1	78.7 ohm, 2W, 1				TITLE:				
								4 STUB BUS COUPLER - NO BUS JACKS				
								CAGE CODE:	DWG NO:		REV:	
								4Z977			1	
								SCALE:			SHEET:	
MILESTEK PART NO	XFMR RATIO T1-T4	RESISTOR VALUE R1-R8	RESISTOR VALUE R9	RESISTOR VALUE R10	BUS & STUB CONNECTOR	MATING CONNECTOR	NOT TO SCALE		1 OF 1			