

DATA CONTAINED IN THIS DOCUMENT IS
 PROPRIETARY TO TROMPETER ELECTRONICS INC.
 AND SHALL NOT BE DISCLOSED, COPIED OR USED
 FOR PROCUREMENT OR MANUFACTURE WITHOUT
 EXPRESS WRITTEN PERMISSION OF TROMPETER
 ELECTRONICS INC.




REVISIONS

305-0063

SH 1

REV	DESCRIPTION	DATE	APPROVED
F	REVISED PER ECO 14521	4-30-02	W/m

RED INDICATES ORIGINAL

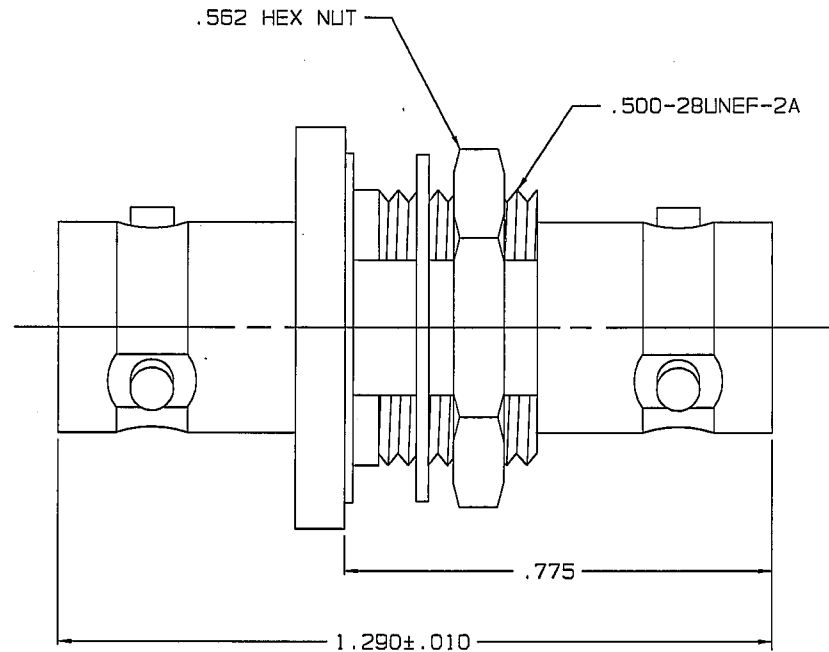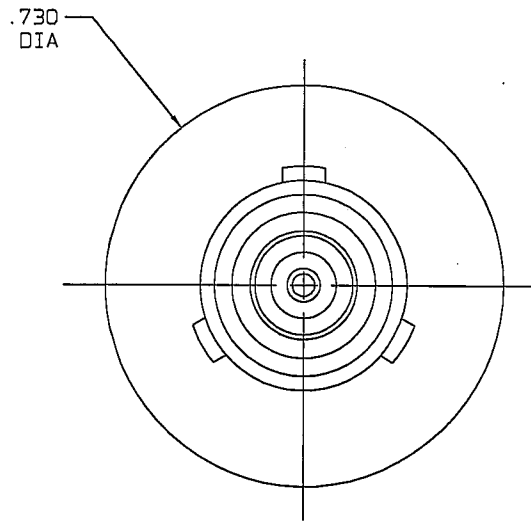

RECOMMENDED
 PANEL CUTOUT
 SCALE: 2/1

- MATERIAL & CONSTRUCTION: MEET THE REQUIREMENTS OF MIL-C-49142 WHERE APPLICABLE
- DIELECTRIC WITHSTANDING VOLTAGE: 500 V COMMON MODE VOLTAGE BETWEEN CIRCUITS
- LEAK RATE: 1×10^{-8} CC/SEC MAX OF TRACER GAS AT ATMOSPHERIC PRESSURE
- HERMETICALLY SEALED TWINAX/TRIAX FEED THRU ADAPTER FOR MOUNTING IN BULKHEAD .187 THK MAX
- FINISH: TFS-1A (NICKEL)

INTERPRET DRAWING PER MIL-STD-100 DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED		TOL: UNLESS SPECIFIED .XX .XXX ± .005 .XXXX ANGLES	
DRAWN AAH	DATE 4-24-02	MATERIAL:	TITLE:
CHECKED JDB	4-26-02		
QUALITY JDB	4-30-02	FINISH:	
MANAGE W/m	4/30/02		
APPROVED W/m	4/26/02		
CAD FILE NO. 305-0063F1		DO NOT SCALE DWG	



BJ78HS

SIZE A	CAGE CODE 14949	DRAWING NO. 305-0063	REV. F
SCALE 4/1	DATE: 5-5-71	SHEET 1 OF 2	

NEXT ASSY