




PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or warrants that any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

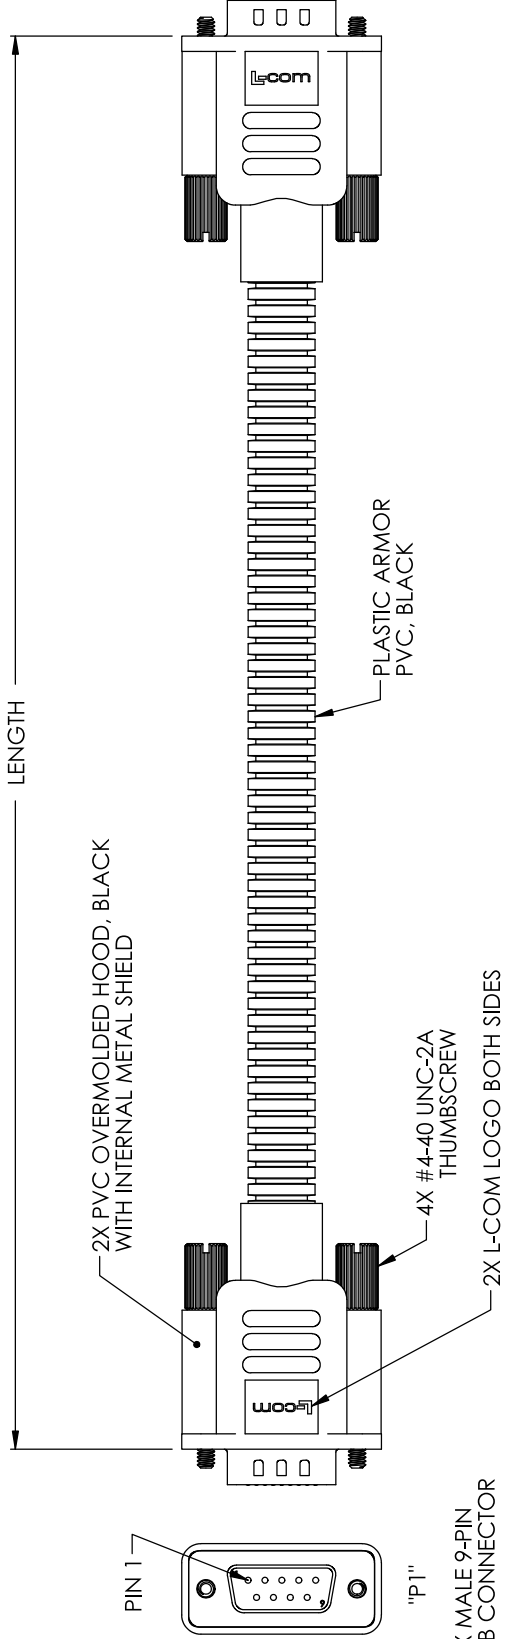

"P1"  
2X MALE 9-PIN  
D-SUB CONNECTOR

"P2"

"P1"	WIRE COLOR	"P2"
1	BLACK	1
2	RED	2
3	ORANGE	3
4	YELLOW	4
5	GREEN	5
6	BLUE	6
7	VIOLET	7
8	GRAY	8
9	BROWN	9
SHELL	DRAIN WIRE	SHELL

PART NUMBER	LENGTH	
	FT	METERS
DSA00017-205F	2.5	0.76
DSA00017-5F	5.0	1.52
DSA00017-10F	10.0	3.05
DSA00017-15F	15.0	4.57
DSA00017-25F	25.0	7.62
DSA00017-50F	50.0	15.24

NOTES:

1. CABLE: UL STYLE 2919, 9 CONDUCTOR (26AWG) (DOUBLE SHIELDED, BRAID & FOIL) JACKET: PVC, COLOR: LIGHT GRAY (PANTONE 400C)
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK PACKAGING SPEC. PS-0054.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

NON CONTROLLED DRAWING IF PRINTED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SIGNATURE	DATE	CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY	
OVERALL CABLE LENGTH TOLERANCE		DRAWN BY: BPUCHASKI	06/05/2018	MilesTek	
>12 (305) 560 (1524) = +.01 (-.01) / -0	>120 (3048) 5320 (1350) = +.01 (152) / -0	CHECKED BY: JLABOY	06/05/2018	MILESTEK CORPORATION	
>300 (7620) = +.05% / -0%	>300 (7620) = +.05% / -0%	APPROVED BY: B.C.GATES	06/05/18	301 BROADWAY, SUITE 100	
ALL OTHER DIMENSIONAL TOLERANCES:		APPROVED MANUFACTURING:	CUSTOMER APPROVAL	PHONE: (949) 484-4400	
X ± .01 (254)	X ± .01 (254)			FAX: (949) 564-1047	
.XXX ± .003 (.13)	.XXX ± .003 (.13)			TITLE	
CUSTOMER REFERENCE DOCUMENT:				CA DB9M/M PLAS ARM	
DASH	NEXT ASSY	USED ON	CAGE CODE: 42977	SHEET 1 OF 1	
APPLICATION		DRAWING NUMBER: DSA00017		SCALE: NTS	

