


REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/18/2018	JLJ

REVISIONS	

DSA00019	A
----------	---

PROPRIETARY NOTICE
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants the recipient any intellectual property rights or any right to use, copy, reproduce, disclose, or disseminate the information contained herein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

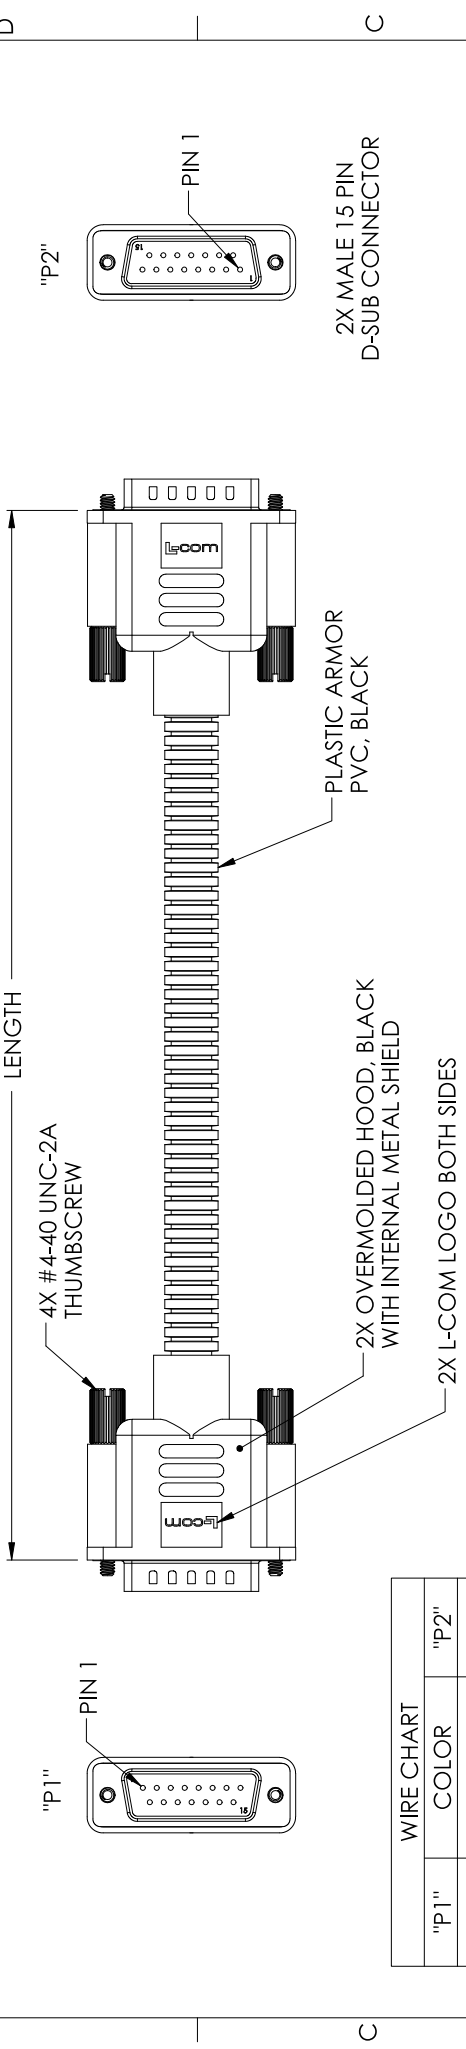

WIRE CHART		
"P1"	COLOR	"P2"
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	VIOLET	8
9	GRAY	9
10	WHITE	10
11	PINK	11
12	LIGHT GREEN	12
13	BLACK/WHITE	13
14	BROWN/WHITE	14
15	RED/WHITE	15
SHELL	DRAIN WIRE	SHELL

PART NUMBER	LENGTH	
	FT	METERS
DSA00019-205F	2.5	0.76
DSA00019-5F	5.0	1.52
DSA00019-10F	10.0	3.05
DSA00019-15F	15.0	4.57
DSA00019-25F	25.0	7.62
DSA00019-50F	50.0	15.24

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
SIGNATURE	DATE	DATE	DATE
DRAWN BY:	18	06/05/20	06/05/20
CHECKED BY:	06/05/20	06/05/20	06/05/20
APPROVED ENGINEERING:	B.GATES	06/05/18	06/05/18
APPROVED MANUFACTURING:	CUSTOMER APPROVAL		
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	MILESTEK CORPORATION 301 ROCKVALE DRIVE, SUITE 100 ROCKVALE, ILLINOIS 60443 PHONE: (940) 484-4400 FAX: (940) 564-1047		
OVERALL CABLE LENGTH TOLERANCE: >12 (305) 560 (1524) = +2 (51) / -0 >120 (3048) 5320 (1350) = +4 (102) / -0 >300 (7620) = +3% / -0%	TITLE CA DB15M/M PLAS ARMR		
ALL OTHER DIMENSIONAL TOLERANCES: X = ± 2 (508) XX = ± 1 (254) XXX = ± 1 (254) / 13	SCALE: NTS		
CUSTOMER REFERENCE DOCUMENT:	CAGE CODE: 42977	DRAWING NUMBER:	DSA00019
DASH	NEXT ASSY	USED ON	APPLICATION

- NOTES:**
- CABLE: UL STYLE 2919, 15 CONDUCTOR (26AWG) (DOUBLE SHIELDED, BRAID & FOIL) JACKET: PVC, LIGHT GRAY (PANTONE 400C)
 - CABLE SHALL BE TESTED FOR CONTINUITY.
 - CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)