


REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/05/18	B.PUCHASKI

REV A	
DSA00020	

A	
---	--

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/05/18	B.PUCHASKI

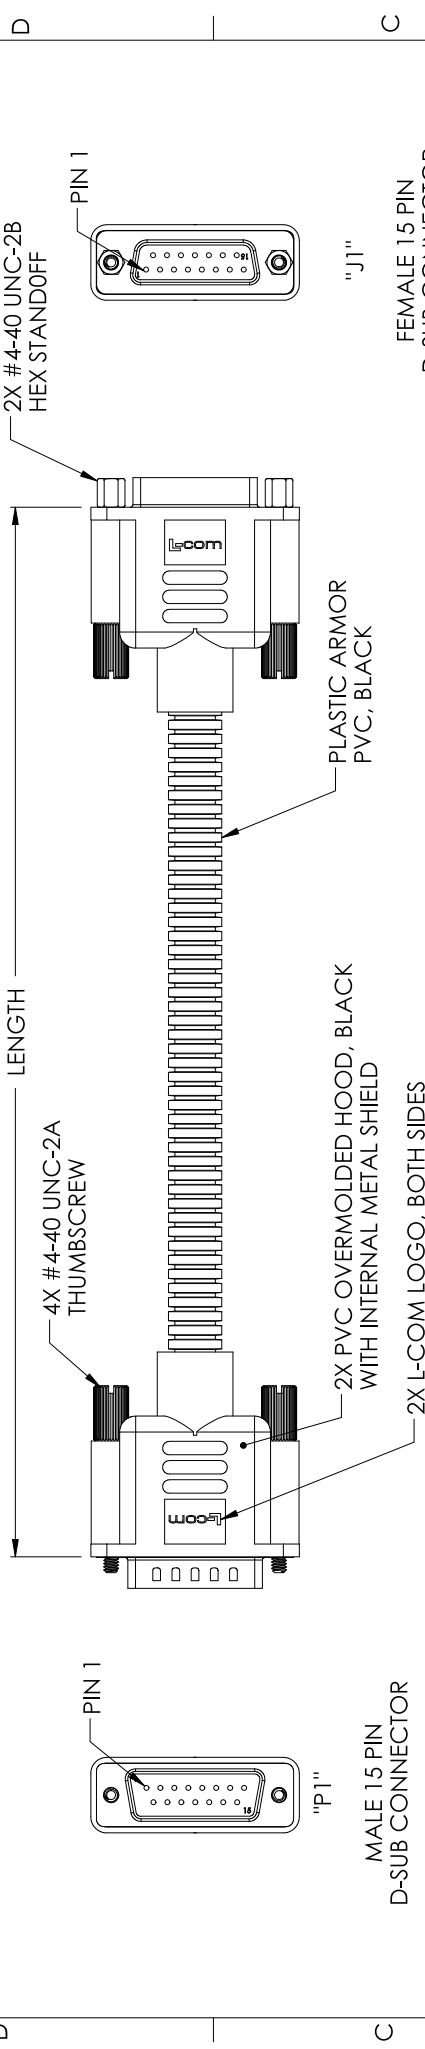

PART NUMBER	LENGTH	
	FT	METERS
DSA00020-205F	2.5	0.76
DSA00020-5F	5.0	1.52
DSA00020-10F	10.0	3.05
DSA00020-15F	15.0	4.57
DSA00020-25F	25.0	7.62
DSA00020-50F	50.0	15.24

"P1"	COLOR	"J1"
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	VIOLET	8
9	GRAY	9
10	WHITE	10
11	PINK	11
12	LIGHT GREEN	12
13	BLACK/WHITE	13
14	BROWN/WHITE	14
15	RED/WHITE	15
SHELL	DRAIN WIRE	SHELL

PROPRIETARY NOTICE  
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the product or any part thereof, and no information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

**NON CONTROLLED DRAWING IF PRINTED**

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY

SIGNATURE	DATE	MILESTEK CORPORATION 301 LEXINGTON, SUITE 100 ROSELAND, NJ 07068 PHONE: (940) 484-4400 FAX: (940) 564-1047	
DRAWN BY: B.PUCHASKI	06/05/18	MilesTek www.MilesTek.com	
CHECKED BY: J.JABOY	06/05/18	TITLE	
APPROVED BY: B.GATES	06/05/18	CA DB15M/F PLAS ARM	
APPROVED MANUFACTURING:	CUSTOMER APPROVAL	SHEET	
		DRAWING NUMBER: DSA00020	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SCALE: NTS	
OVERALL CABLE LENGTH TOLERANCE: >12 (305) 560 (1424) = +.01 (-.01) / -0 >120 (3048) 5320 (13620) = +.01 (0.25) / -0 >300 (7620) = +.03 / -0%		CAGE CODE: 42977	
ALL OTHER DIMENSIONAL TOLERANCES: X = ± .015 (0.38) Y = ± .010 (0.25) XXX = ± .003 (0.076)		APPLICATION	
CUSTOMER REFERENCE DOCUMENT:		SHEET 1 OF 1	

1. CABLE: UL STYLE 2919, 15 CONDUCTOR (26AWG) (DOUBLE SHIELDED, BRAID & FOIL) JACKET: PVC, LIGHT GRAY (PANTONE 400C)  
 2. CABLE SHALL BE TESTED FOR CONTINUITY.  
 3. CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (ROHS DIRECTIVE)