


PROPRIETARY NOTICE

This document discloses confidential subject matter in which Milestek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or warrants that any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with Milestek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/18/18	JLABOY

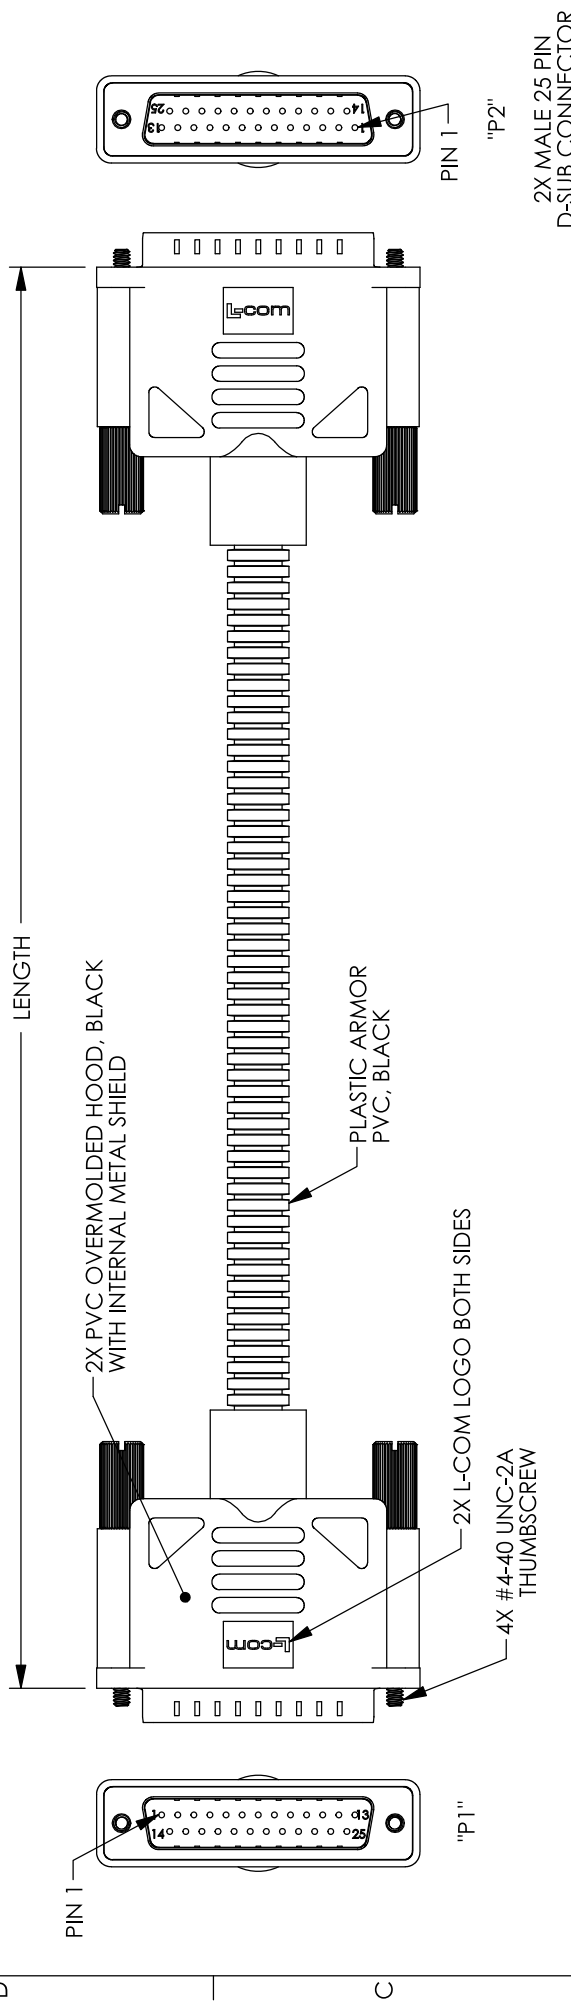

"P1" 2X MALE 25 PIN D-SUB CONNECTOR

"P2" 2X MALE 25 PIN D-SUB CONNECTOR

NOTES:

- CABLE: U.L. STYLE 2919 TYPE CL2, 25 CONDUCTOR (26AWG) (DOUBLE SHIELDED, BRAID & FOIL) JACKET: PVC, COLOR: LIGHT GRAY (PANTONE 400C)
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

PART NUMBER	LENGTH	
	FT	METERS
DSA00021-205F	2.5	0.76
DSA00021-5F	5.0	1.52
DSA00021-10F	10.0	3.05
DSA00021-15F	15.0	4.57
DSA00021-25F	25.0	7.62
DSA00021-50F	50.0	15.24

"P1"	WIRE COLOR	"P2"
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	VIOLET	8
9	GRAY	9
10	WHITE	10
11	PINK	11
12	PINK/BLACK	12
13	LIGHT GREEN	13
14	BLACK/WHITE	14
15	BROWN/WHITE	15
16	RED/WHITE	16
17	ORANGE/WHITE	17
18	GREEN/WHITE	18
19	BLUE/WHITE	19
20	VIOLET/WHITE	20
21	RED/BLACK	21
22	ORANGE/BLACK	22
23	YELLOW/BLACK	23
24	GREEN/BLACK	24
25	GRAY/BLACK	25
SHELL	DRAIN WIRE	SHELL

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
SIGNATURE	DATE	Milestek CORPORATION 301 BROADWAY, SUITE 100 ROSELAND, NJ 07068 PHONE: (940) 484-4400 FAX: (940) 564-1047	
BPUCHASKI	06/05/18		
JLABOY	06/05/18		
B.G.ATES	06/05/18		
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		TITLE	
OVERALL CABLE LENGTH TOLERANCE		CA DB25M/M PLAS ARMR	
≤12 (305) 560 (1424) = ±.01 (-.01) / +.0		SEE	
>12 (305) 560 (1424) = ±.01 (-.01) / +.0		DRAWING NUMBER:	
>120 (3048) 5320 (1369) = +.01 (-.01) / -0		DSA00021	
>300 (7620) = ±.05% / -.05%		SCALE: NTS	
ALL OTHER DIMENSIONAL TOLERANCES:		CAGE CODE: 42977	
X ±.01 (0.25)		APPLICATION	
XX ±.005 (0.13)		NEXT ASSY	
XXX ±.003 (0.08)		USED ON	
CUSTOMER REFERENCE DOCUMENT:		SHEET 1 OF 1	