

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/18/18	B.PUCHASKI

REV A	
-------	--

dsq00022	
----------	--

A	
---	--

REVISIONS	
-----------	--

1	
---	--

2	
---	--

3	
---	--

4	
---	--

5	
---	--

6	
---	--

7	
---	--


8	
---	--

D	
---	--

C	
---	--

B	
---	--

A	
---	--

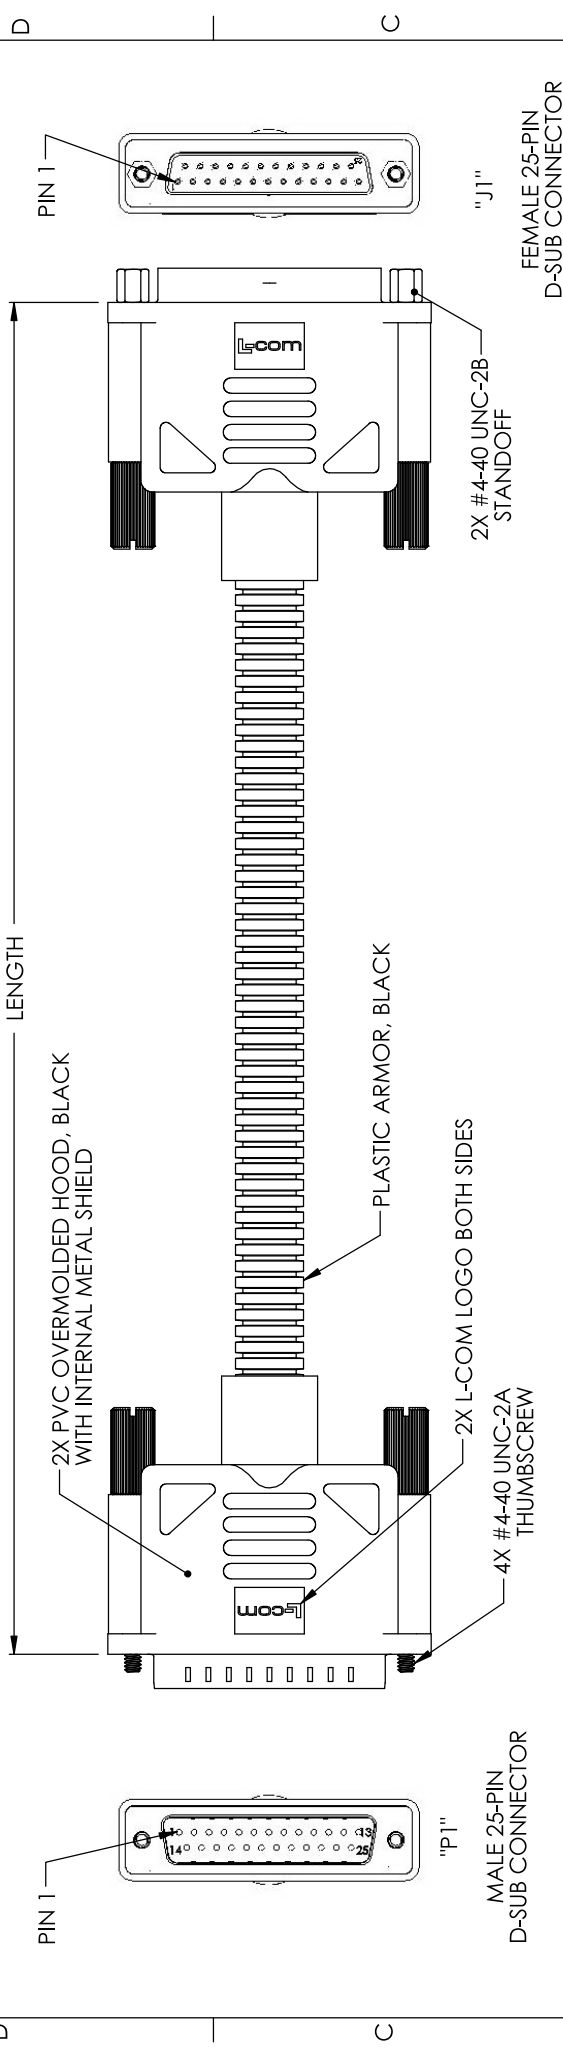

PART NUMBER	LENGTH	
	FT	METERS
DSA00022-205F	2.5	0.76
DSA00022-5F	5.0	1.52
DSA00022-10F	10.0	3.05
DSA00022-15F	15.0	4.57
DSA00022-25F	25.0	7.62
DSA00022-50F	50.0	15.24

NOTES:

- CABLE: U.L.-STYLE 2919 TYPE CL2, 25 CONDUCTOR (26AWG) (DOUBLE SHIELDED, BRAID & FOIL) JACKET: PVC, COLOR: LIGHT GRAY (PANTONE 400C)
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK PACKAGING SPEC. PS-0054.

REGULATORY COMPLIANCE: CE2011/65/EU (ROHS DIRECTIVE)

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >12 (305) 560 (1424) = +.01 / -.0 >120 (3048) 5320 (1350) = +.0152 / -.0 >300 (7620) = +.03 / -.03		B.PUCHASKI	06/05/18
ALL OTHER DIMENSIONAL TOLERANCES: X = ± .0108 XX = ± .003 XXX = ± .003 (1:3)		J.JAROVY	06/05/18
CUSTOMER REFERENCE DOCUMENT:		B.C.GATES	06/05/18
DASH: NEXT ASSY USED ON APPLICATION		APPROVED MANUFACTURING:	
APPLICATION		CUSTOMER APPROVAL	
CAGE CODE: 42977		TITLE	
SCALE: NTS		CA DB25M/F PLAS ARM	
DRAWING NUMBER: DSA00022		SHEET 1 OF 1	

PROPRIETARY NOTICE
This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or warrants the right to use, reproduce, or disseminate any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.