


REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/07/18	B.PUCHASKI

REV	DESCRIPTION	DATE	APPROVED
DSA00023			


REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/07/18	B.PUCHASKI

PROPRIETARY NOTICE  
 This document discloses confidential subject matter in which Mylestek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants the right to use, copy, reproduce, or disseminate any part thereof, or to practice any method or process, except by written permission from, or written agreement with Mylestek Corporation and its subsidiaries.


REVISIONS

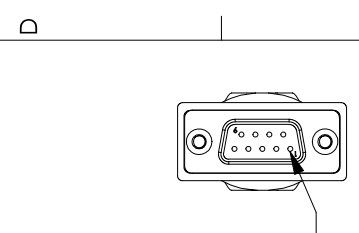


PIN 1  
 2X DB9 MALE CONNECTOR

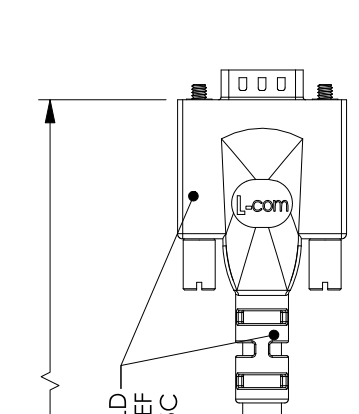


4X 4-40 UNC-2A THUMBSCREW  
 2X MOLDED HOLD AND STRAIN RELIEF PVC, 445C

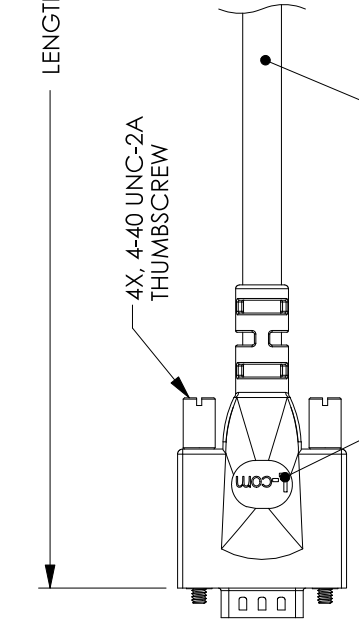


4X #4-40 UNC-2B CAPTIVE NUT  
 LOGO INSERT BOTH SIDES

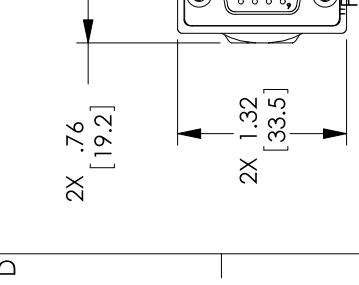




LENGTH



"P2"  
 PIN 1

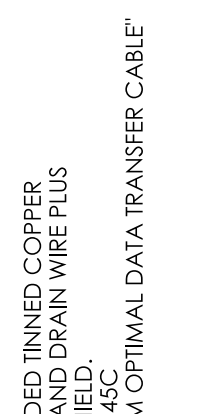








UL STYLE: 2464  
 9 COND. 20 AWG STRANDED TINNED COPPER WITH ALUM/POLY SHIELD AND DRAIN WIRE PLUS TINNED COPPER BRAID SHIELD.  
 JACKET: PVC, PANTONE 445C  
 JACKET MARKING: "L-COM OPTIMAL DATA TRANSFER CABLE"

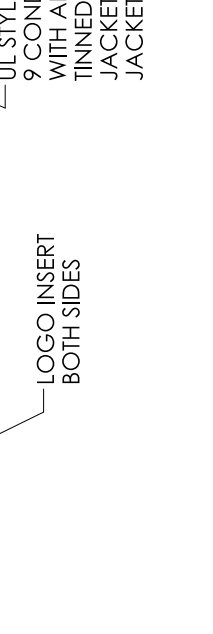








WIRE MAP

"P1"	COLOR	"P2"
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	PURPLE	8
9	GRAY	9
SHELL	DRAIN	SHELL

MODEL NUMBER	LENGTH	
	FEET	METERS
DSA00023-1F	1.0	.30
DSA00023-205F	2.5	.76
DSA00023-5F	5.0	1.52
DSA00023-10F	10.0	3.05
DSA00023-25F	25.0	7.62
DSA00023-50F	50.0	15.24



H



4X #4-40 UNC-2B CAPTIVE NUT

**NOTES:**  
 SUPPLIED WITH THUMBSCREWS IN PLACE.  
 NOTE: SUPPLIED WITH OPTIONAL USE HARDWARE AND INSTRUCTIONS.  
 CABLE INTERCONNECTION HARDWARE: (4) SCREWLOCKS, H= .191"  
 PANEL MOUNT HARDWARE: (4) SCREWLOCKS, H= .160"

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.  
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY


SIGNATURE	DATE
B.PUCHASKI	06/05/18
J.JAROVY	06/05/18
B.GATES	06/05/18

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES
OVERALL CABLE LENGTH TOLERANCE: >1/2 (305) - 5/8 (152.4) = +.01 (-.01) / -0 >5/8 (152.4) - 1 (25.4) = +.01 (-.01) / -0 >1 (25.4) - 1.5 (38.1) = +.01 (-.01) / -0 >1.5 (38.1) - 2 (50.8) = +.01 (-.01) / -0 >2 (50.8) - 3 (76.2) = +.01 (-.01) / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .01 (.254) .XX = ± .005 (.127) .XXX = ± .003 (.076)

SIGNATURE	DATE	TITLE
B.PUCHASKI	06/05/18	CA,DB9M/M PWR #20 MOLD

SHEET	DRAWING NUMBER:	SCALE:	SHEET 1 OF 1
A	DSA00023		

CAGE CODE: 42977



MILESTEK CORPORATION  
 301 KENYON AVE. SUITE 100  
 FARMINGTON, CT 06030  
 PHONE: (949) 484-4400  
 FAX: (949) 564-1047