


--	--	--	--	--

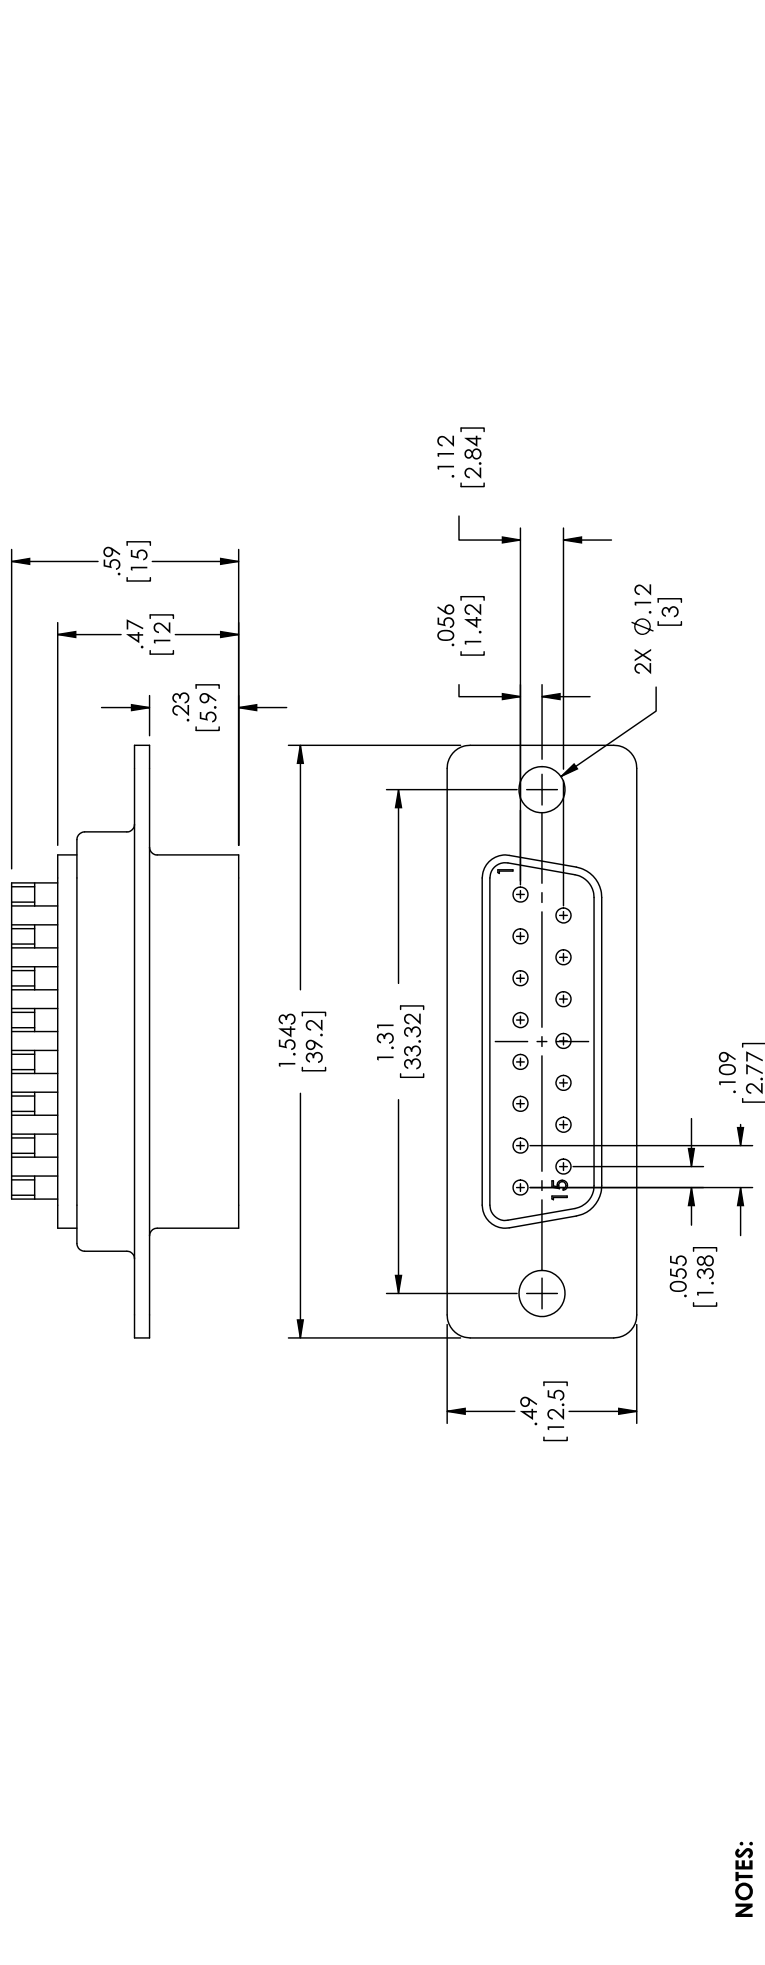

MATERIAL:

CONNECTOR SHELL: STEEL
CONNECTOR INSULATOR: THERMOPLASTIC, UL94V-0 RATED
CONTACTS: BRASS

FRONT SHELL: NICKEL PLATED
BACK SHELL: TIN PLATED
CONTACTS: 5 µin SELECTIVE GOLD
SOLDER CUPS: TIN PLATED

DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC rms
 INSULATION RESISTANCE: 500MΩ @ DC 500V
 CONTACT RESISTANCE: 25 MILLIOHMS MAX
 CURRENT RATING: 1 AMP

OPERATING TEMPERATURE: -55°C TO +105°C
CONNECTOR SHALL BE PACKAGED IN ACCORDANCE WITH
MILESTEK SPEC PS-0054. (SEE CHART)

		MILESTEK CORPORATION 301 LECHE LAKE, SUITE 100 LEWISVILLE, TX 75056 PH: (972) 454-0400 FAX: (972) 355-5871	
TITLE SOLDER CUP D-SUB CONNECTOR DB15 FEMALE		REV. A	
DRAWING NUMBER: DSB00037		SHEET 1 OF 1	
SCALE: NTS		A	
DATE 12/11/2018		CAGE CODE: 4Z977	
SIGNATURE [Signature]		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
DRAWING BY BRUCHASKI		APPROVED BY: DRENELLO	
DATE 12/17/2018		DATE 12/14/2018	
OVERALL CABLE LENGTH TOLERANCE: $>12 [305 \pm 5.00, 324 \pm 4.13] / -0$ $>20 [381 \pm 5.00, 324 \pm 4.13] / -0$ $>100 [1321 \pm 5.00, 1324 \pm 4.13] / -0$ $>200 [2601 \pm 5.00, 2604 \pm 4.13] / -0$		ALL OTHER DIMENSIONAL TOLERANCES: $XX \pm .02 (51)$ $XX \pm .02 (51)$ $XXX \pm .005 (1.3)$	
DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		CUSTOMER REFERENCE DOCUMENT:	