



8 7 6 5 4 3 2 1

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the information contained hereon, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/19/2018	BPUCHASKI

D C B A

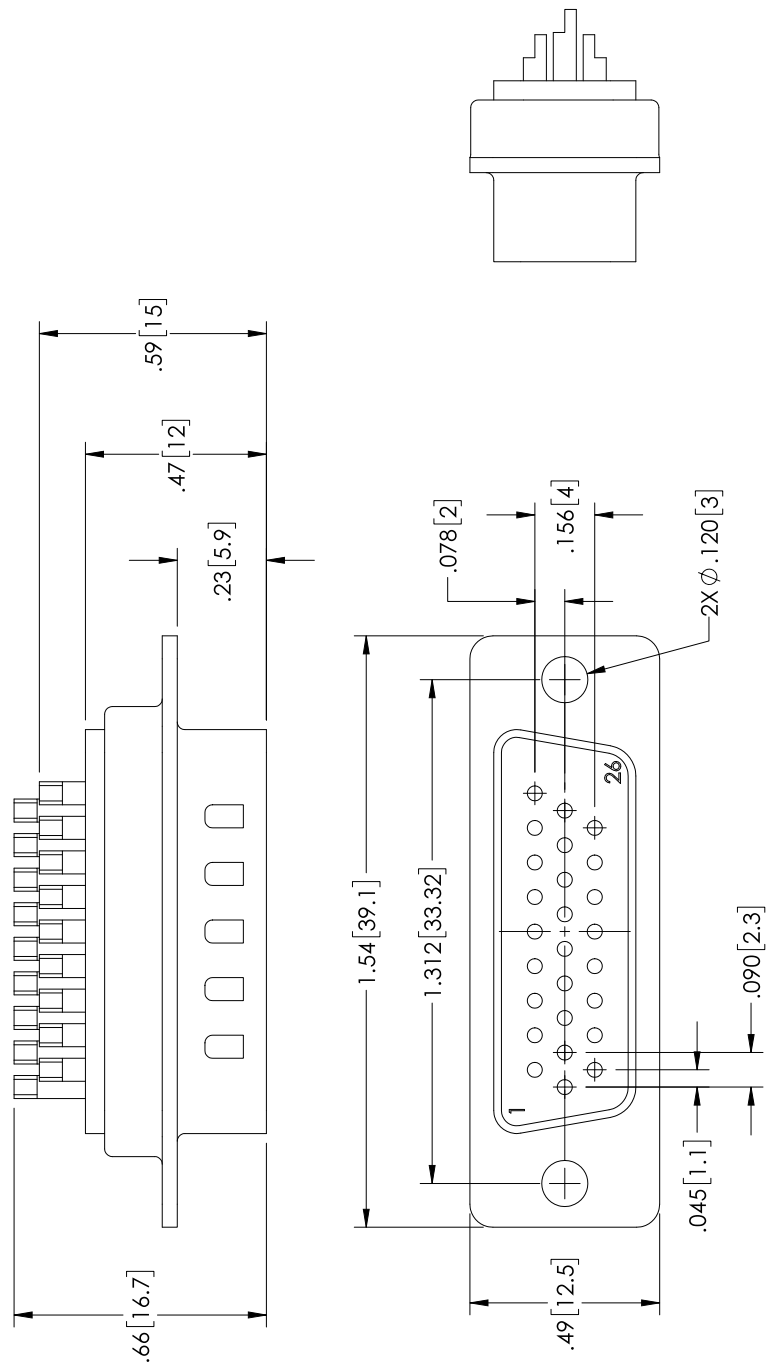

PART NUMBER	PACKAGING
DSB00042	1/BAG
DSB00029	70/TRAY

NOTES:
MATERIAL:
 CONNECTOR SHELL: STEEL
 CONTACTS: BRASS
 CONNECTOR INSULATOR: THERMOPLASTIC, UL94V-0 RATED

FINISH:
 CONTACTS: GOLD FLASH IN CONTACT AREA OVER NICKEL
 FRONT SHELL: NICKEL PLATED OVER COPPER
 REAR SHELL: TIN PLATED OVER COPPER
 SOLDER CUPS: TIN PLATED OVER NICKEL

ELECTRICAL:
 CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 500 VAC FOR 1 MINUTE
 INSULATION RESISTANCE: 1000 MΩ MIN @500 VDC
 CONTACT RESISTANCE: 30 MΩ MAX

MISCELLANEOUS:
 OPERATING TEMPERATURE RANGE: -55°C TO +105°C
 CONNECTOR SHALL BE PACKAGED IN ACCORDANCE WITH MILESTEK SPEC PS-0054. (SEE CHART)

SIGNATURE		DATE	TITLE
DRAWN BY: BPUCHASKI	12/11/2018	12/11/2018	
CHECKED BY: DFRIBELLO	12/17/2018	12/17/2018	
APPROVED BY: BGATES			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			

		MILESTEK CORPORATION 301 KENYON AVE., SUITE 100 BOSTON, MA 02128 PHONE: (949) 484-9400 FAX: (949) 564-1047	
SCALE: INTS	A	DRAWING NUMBER:	DSB00042
CAGE CODE: 4Z977		REV.	A
CUSTOMER REFERENCE DOCUMENT:			

8 7 6 5 4 3 2 1