


8 7 6 5 4 3 2 1

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the design, structure, analysis, theory, or information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/20/2018	BPUCHASKI

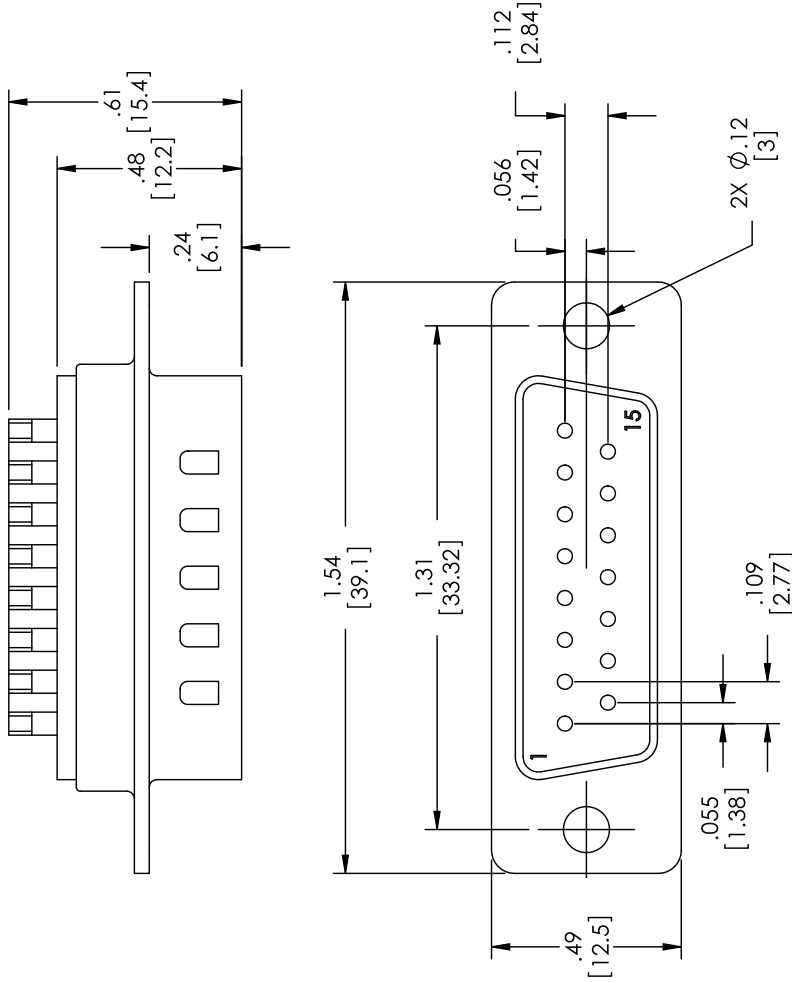

CATALOG #	PACKAGING
DSB00032	1/BAG
DSB00013	70/TRAY

NOTES:

MATERIAL:
CONNECTOR SHELL: STEEL
CONNECTOR INSULATOR: THERMOPLASTIC, UL94V-0 RATED
CONTACTS: COPPER ALLOY

FINISH:
FRONT SHELL: NICKEL PLATED
BACK SHELL: TIN PLATED
CONTACTS: GOLD FLASH IN CONTACT AREA OVER NICKEL PLATE
SOLDER CUPS: TIN PLATED

ELECTRICAL:
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC rms
INSULATION RESISTANCE: 5000MΩ @ 500VDC

MISCELLANEOUS:
OPERATING TEMPERATURE: -55°C TO +105°C
CONNECTOR SHALL BE PACKAGED IN ACCORDANCE WITH
MILESTEK SPEC. PS-0054. (SEE CHART)

MilesTek Military Aerospace Communications Industrial		SIGNATURE	DATE
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		DRAWN BY: BPUCHASKI	12/11/2018
OVERALL CABLE LENGTH TOLERANCE: ≤10 [254] = +.1 [25] / -.0 [0] >10 [254] ≤100 [2540] = +.1 [25] / -.0 [0] >100 [2540] ≤500 [12700] = +.1 [25] / -.0 [0] >500 [12700] = +.1 [25] / -.0 [0]		CHECKED BY: DFRUELO	12/17/2018
ALL OTHER DIMENSIONAL TOLERANCES: XX = ±.005 [0.127] XXX = ±.003 [0.076]		APPROVED BY: BGATES	12/14/2018
TITLE		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
SOLDER CUP D-SUB CONNECTOR DB15 MALE		CAGE CODE: 4Z977	
MILESTEK CORPORATION 301 E. MAIN ST., SUITE 100 EVANSTON, IL 60119 PHONE: (940) 484-9400 FAX: (940) 564-1047		DRAWING NUMBER: DSB00032	
REV. A		SHEET 1 OF 1	