


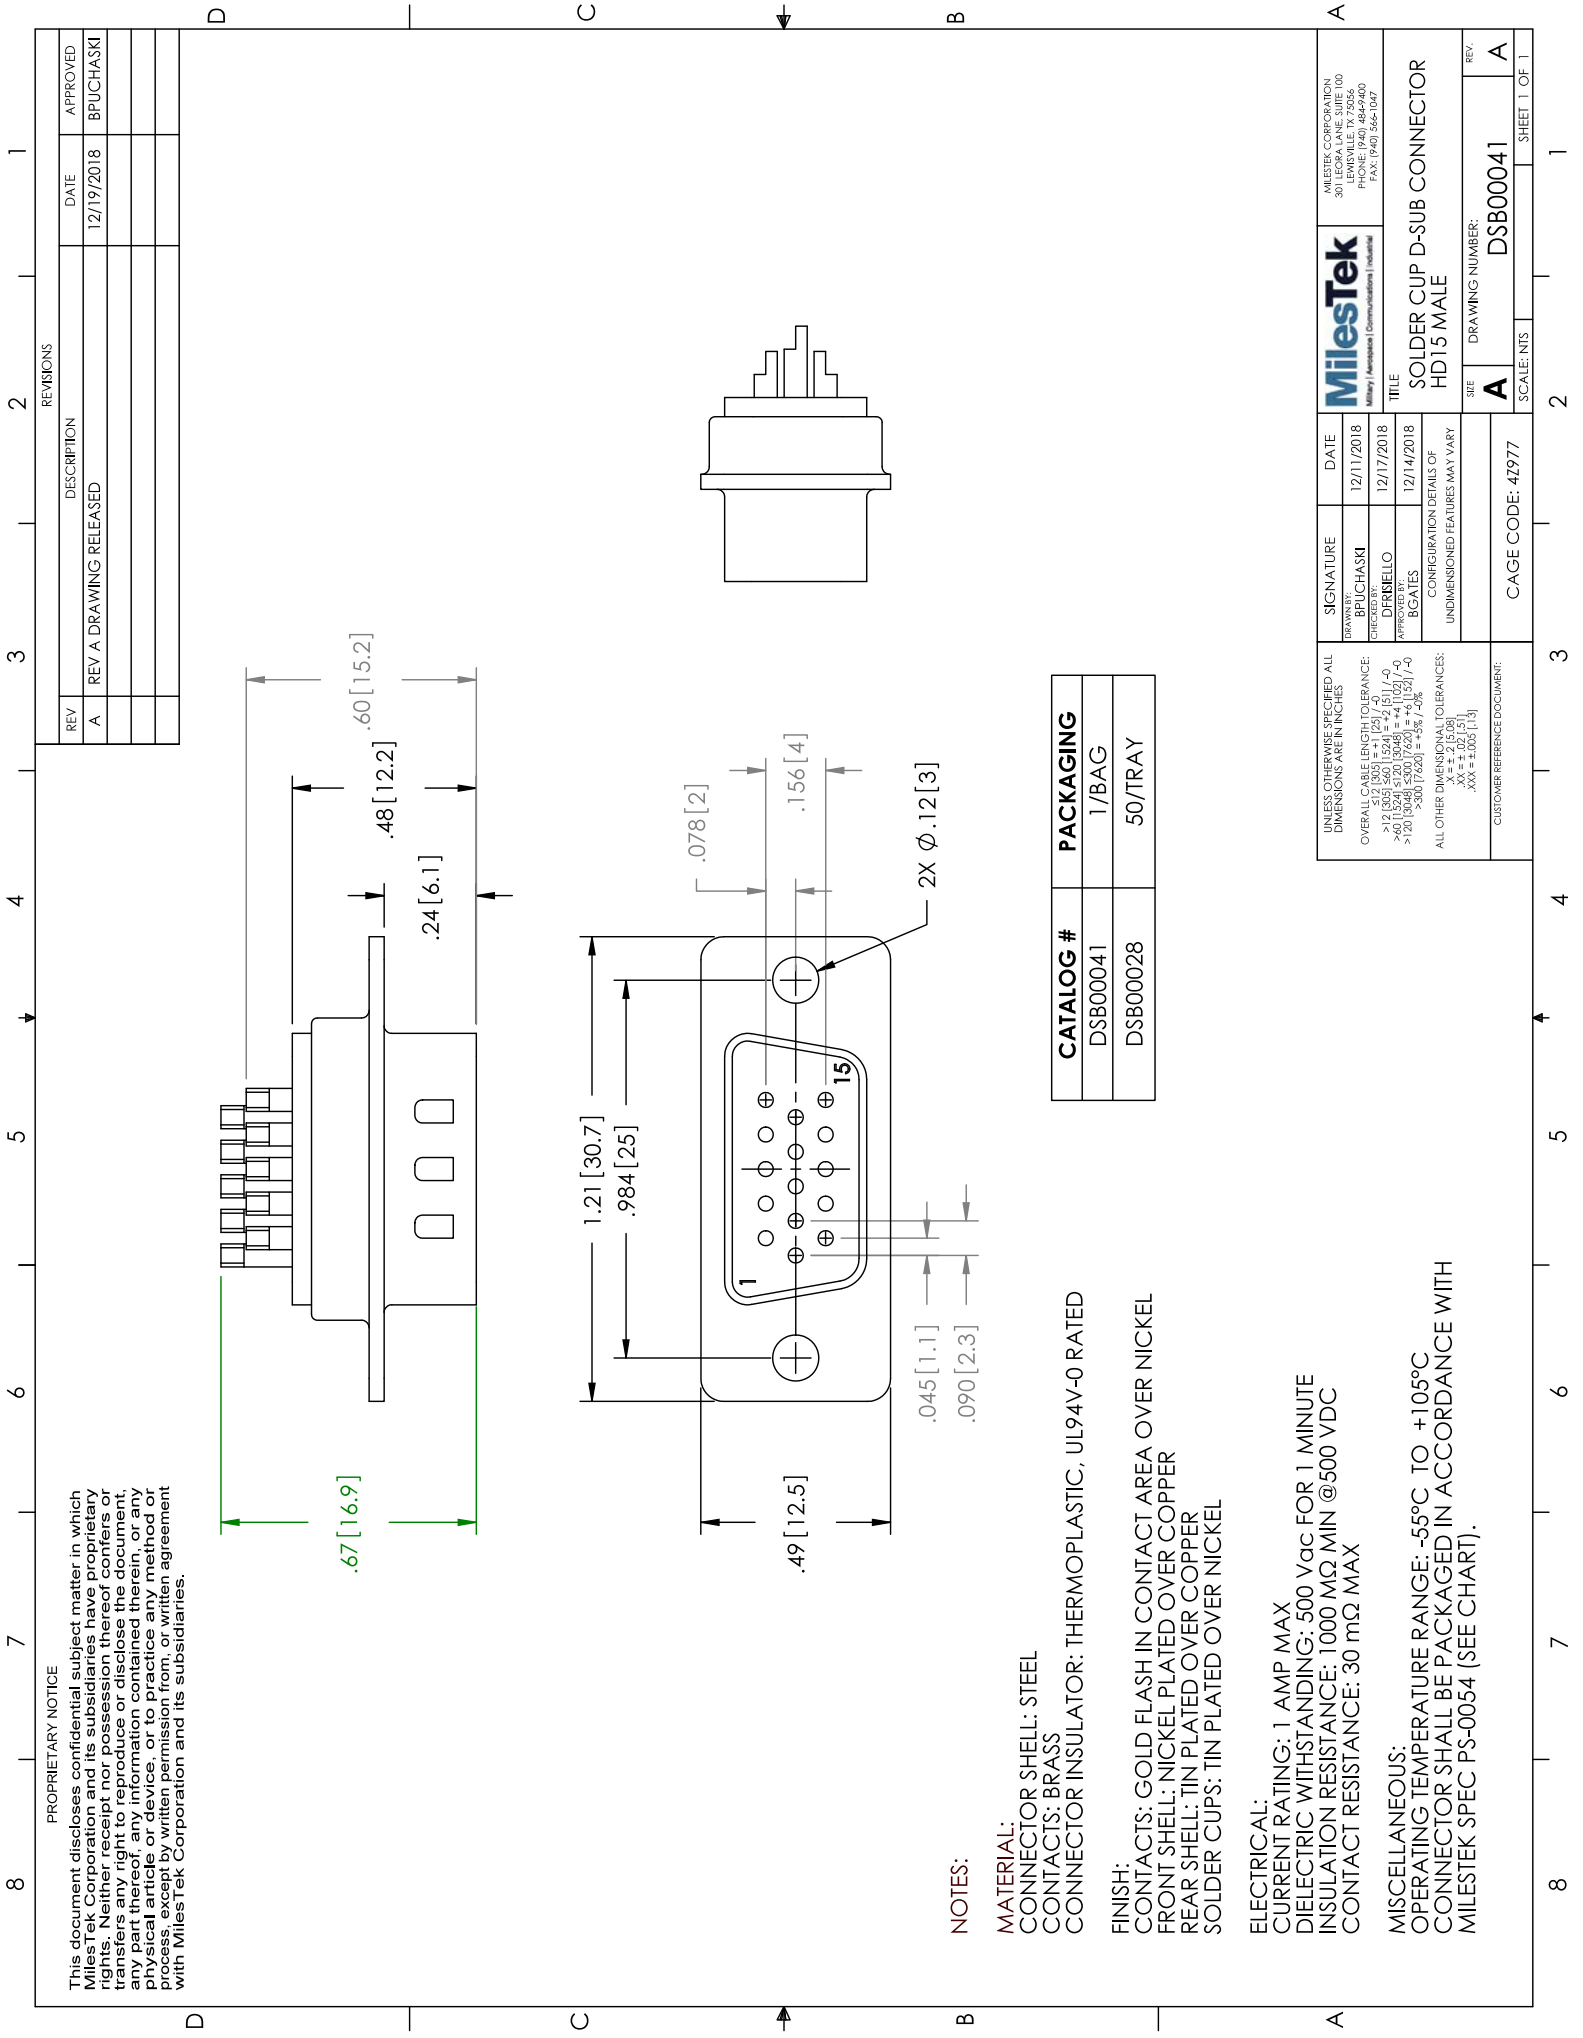

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/19/2018	BPUCHASKI

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SIGNATURE	DATE	MilesTek Memory Movement Communications Innovation		MILESTEK CORPORATION 301 LINDA LANE, SUITE 100 EVANSTON, IL 60120 PHONE: (940) 484-9400 FAX: (940) 564-1047	
OVERALL CABLE LENGTH TOLERANCE: ≤10 [.512] [12.7] = ±.125 / -0 >10 [.512] [12.7] = ±.125 / -0 >10 [.512] [12.7] = ±.125 / -0 >10 [.512] [12.7] = ±.125 / -0		BPUCHASKI	12/11/2018	TITLE		SOLDER CUP D-SUB CONNECTOR	
ALL OTHER DIMENSIONAL TOLERANCES: XX = ±.005 [0.125] XXX = ±.005 [0.125]		DFRNELO	12/17/2018	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		HD15 MALE	
CUSTOMER REFERENCE DOCUMENT:				CAGE CODE: 4Z977		REV. A	
				DRAWING NUMBER: DSB000041		SHEET 1 OF 1	

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the subject matter, and any use of the information contained herein, in any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

NOTES:

MATERIAL:
CONNECTOR SHELL: STEEL
CONTACTS: BRASS
CONNECTOR INSULATOR: THERMOPLASTIC, UL94V-0 RATED

FINISH:
CONTACTS: GOLD FLASH IN CONTACT AREA OVER NICKEL
FRONT SHELL: NICKEL PLATED OVER COPPER
REAR SHELL: TIN PLATED OVER COPPER
SOLDER CUPS: TIN PLATED OVER NICKEL

ELECTRICAL:
CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500 Vac FOR 1 MINUTE
INSULATION RESISTANCE: 1000 MΩ MIN @500 VDC
CONTACT RESISTANCE: 30 mΩ MAX

MISCELLANEOUS:
OPERATING TEMPERATURE RANGE: -55°C TO +105°C
CONNECTOR SHALL BE PACKAGED IN ACCORDANCE WITH MILESTEK SPEC PS-0054 (SEE CHART).

CATALOG #	PACKAGING
DSB000041	1/BAG
DSB000028	50/TRAY