


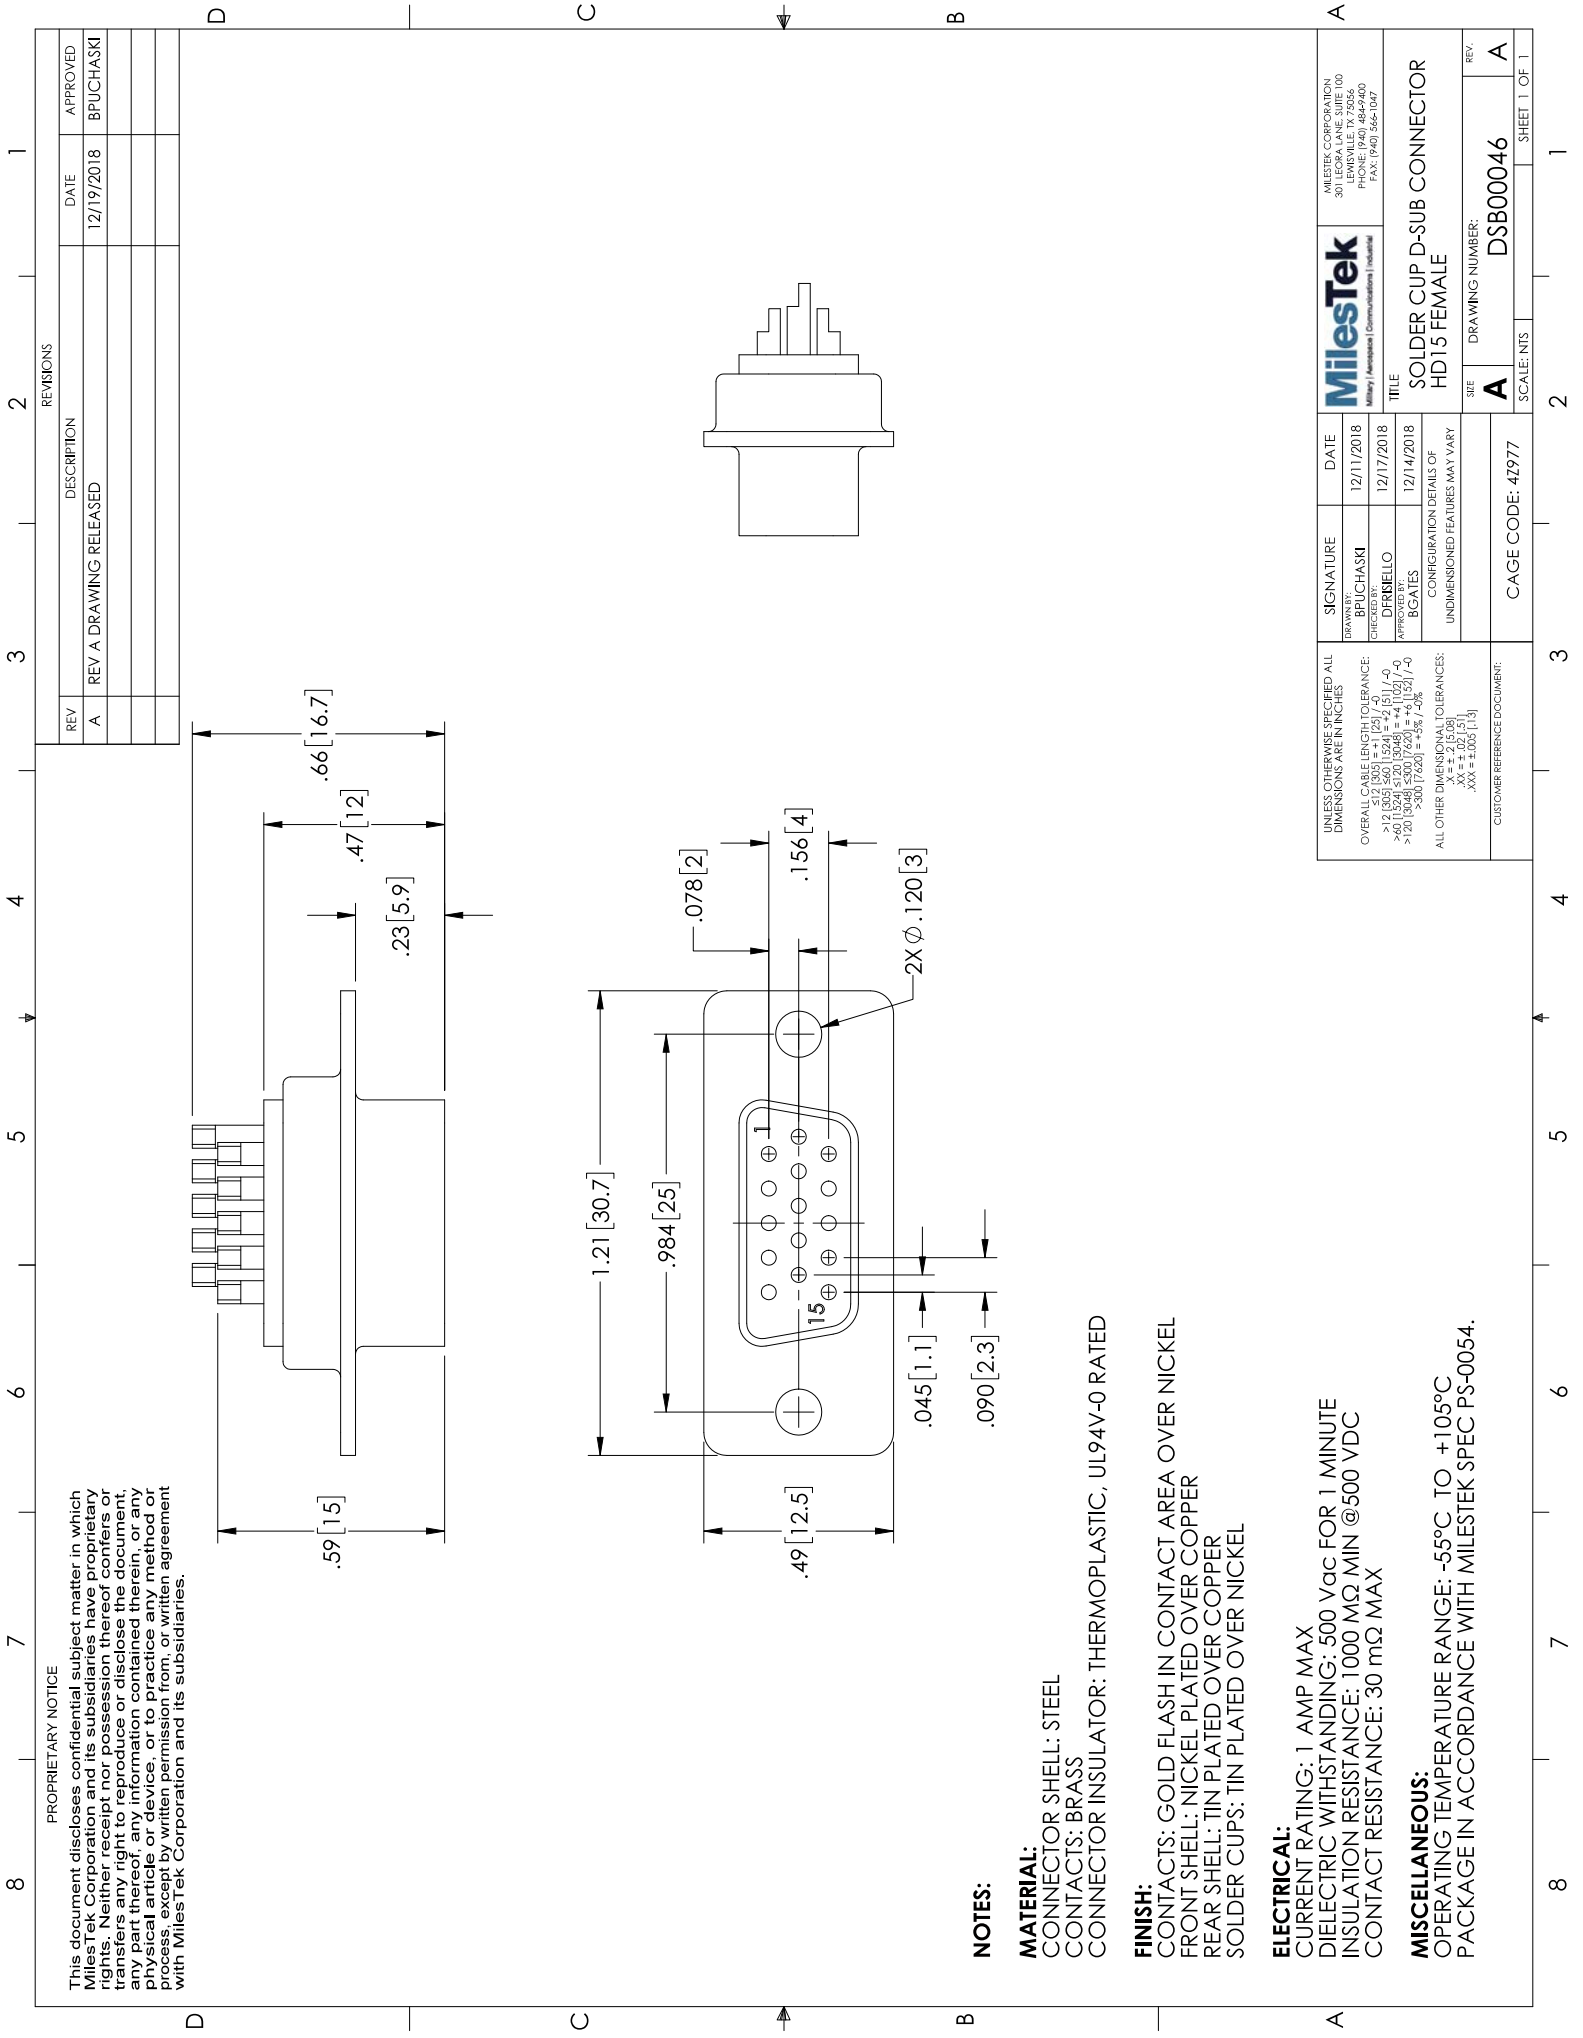

8 7 6 5 4 3 2 1

PROPRIETARY NOTICE

This document discloses confidential subject matter in which Miletex Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right to reproduce or distribute the document, or any part thereof, and information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with Miletex Corporation and its subsidiaries.

D

C

B

A

REV A

DESCRIPTION

DATE

APPROVED

12/19/2018

BPUCHASKI

REV A

DESCRIPTION

DATE

APPROVED

12/19/2018

BPUCHASKI

REV A

DESCRIPTION

DATE

APPROVED

12/19/2018

BPUCHASKI

REV A

DESCRIPTION

DATE

APPROVED

12/19/2018

BPUCHASKI

REV A

DESCRIPTION

DATE

APPROVED

12/19/2018

BPUCHASKI

REV A

DESCRIPTION

DATE

APPROVED

12/19/2018

BPUCHASKI

REV A

DESCRIPTION

DATE

APPROVED

NOTES:

MATERIAL:

CONNECTOR SHELL: STEEL
CONTACTS: BRASS
CONNECTOR INSULATOR: THERMOPLASTIC, UL94V-0 RATED

FINISH:

CONTACTS: GOLD FLASH IN CONTACT AREA OVER NICKEL
FRONT SHELL: NICKEL PLATED OVER COPPER
REAR SHELL: TIN PLATED OVER COPPER
SOLDER CUPS: TIN PLATED OVER NICKEL

ELECTRICAL:

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500 VAC FOR 1 MINUTE
INSULATION RESISTANCE: 1000 MΩ MIN @ 500 VDC
CONTACT RESISTANCE: 30 mΩ MAX

MISCELLANEOUS:

OPERATING TEMPERATURE RANGE: -55°C TO +105°C
PACKAGE IN ACCORDANCE WITH MILESTEK SPEC PS-0054.



MILESTEK CORPORATION
301 E. MAIN ST., SUITE 100
MILWAUKEE, WI 53212
PHONE: (940) 484-9400
FAX: (940) 564-1047

TITLE
SOLDER CUP D-SUB CONNECTOR
HD15 FEMALE

REV. A
DRAWING NUMBER: DSB00046
SCALE: NTS
SHEET 1 OF 1

CAGE CODE: 4Z977
CUSTOMER REFERENCE DOCUMENT:

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES
OVERALL CABLE LENGTH TOLERANCE:
≤ 120 [3048] = ± .125 [3.18]
> 120 [3048] = ± .156 [4]
ALL OTHER DIMENSIONAL TOLERANCES:
XX = ± .015 [0.38]
XXX = ± .005 [0.13]