



8 7 6 5 4 3 2 1

PROPRIETARY NOTICE

This document discloses confidential subject matter in which Miletex Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right, title, or interest in the subject matter, and all information contained herein, in any form, is to be kept confidential and not disclosed to any third party without the prior written consent of Miletex Corporation, except by written permission from, or written agreement with Miletex Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/19/2018	BPUCHASKI

D C B A

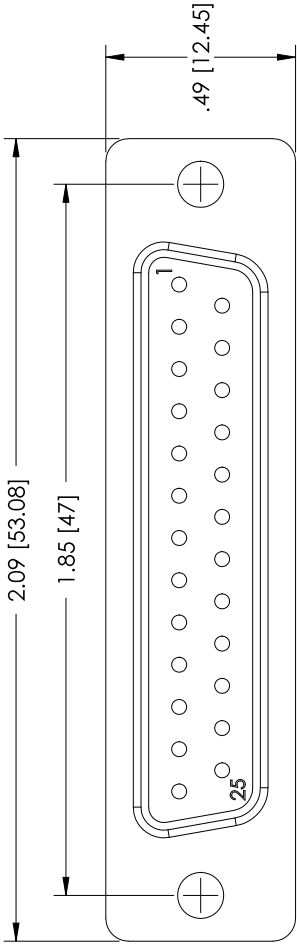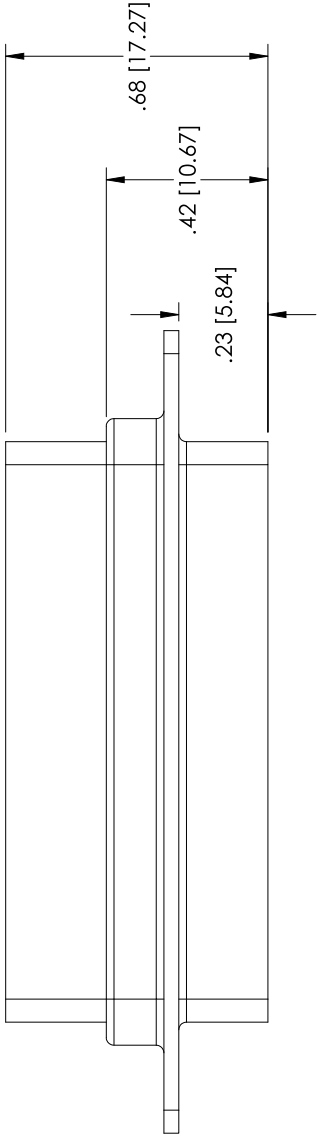

CATALOG #	PACKAGING
DSB000058	1/BAG
DSB000025	50/TRAY

NOTES:

MATERIAL:

SHELL: STEEL

INSULATOR: PBT W/GLASS FIBER FILL (UL 94V-0 RATED)

FINISH:

FRONT SHELL: BRIGHT TIN/NICKEL PLATED

REAR SHELL: BRIGHT TIN PLATED

PACKAGING:

CONNECTOR SHALL BE PACKAGED IN ACCORDANCE WITH MILESTEK SPEC. PS-0054. (SEE CHART)

MilesTek Military Aerospace Communications Industrial		SIGNATURE	DATE	MILESTEK CORPORATION 1000 WILSON AVENUE, SUITE 100 301 EDWARDS DRIVE, SUITE 100 PHONE: (940) 484-9400 FAX: (940) 564-1047	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		DRAWN BY: BPUCHASKI	12/11/2018	TITLE INSERTION TYPE D-SUB CONNECTOR DB25 FEMALE	
OVERALL CABLE LENGTH TOLERANCE: ≤ 120 [3048] = +1 [25] / -0 > 120 [3048] = +1 [25] / -0.015 [0.381] ≤ 120 [3048] = +1 [25] / -0.015 [0.381] > 120 [3048] = +1 [25] / -0.015 [0.381]		CHECKED BY: DPRINELLO	12/17/2018	REV. A	
ALL OTHER DIMENSIONAL TOLERANCES: XX = ± 0.015 [0.381] XXX = ± 0.005 [0.127]		APPROVED BY: BGATES	12/14/2018	DRAWING NUMBER: DSB000058	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CAGE CODE: 4Z977		SCALE: NTS	
CUSTOMER REFERENCE DOCUMENT:		SHEET 1 OF 1		1	