


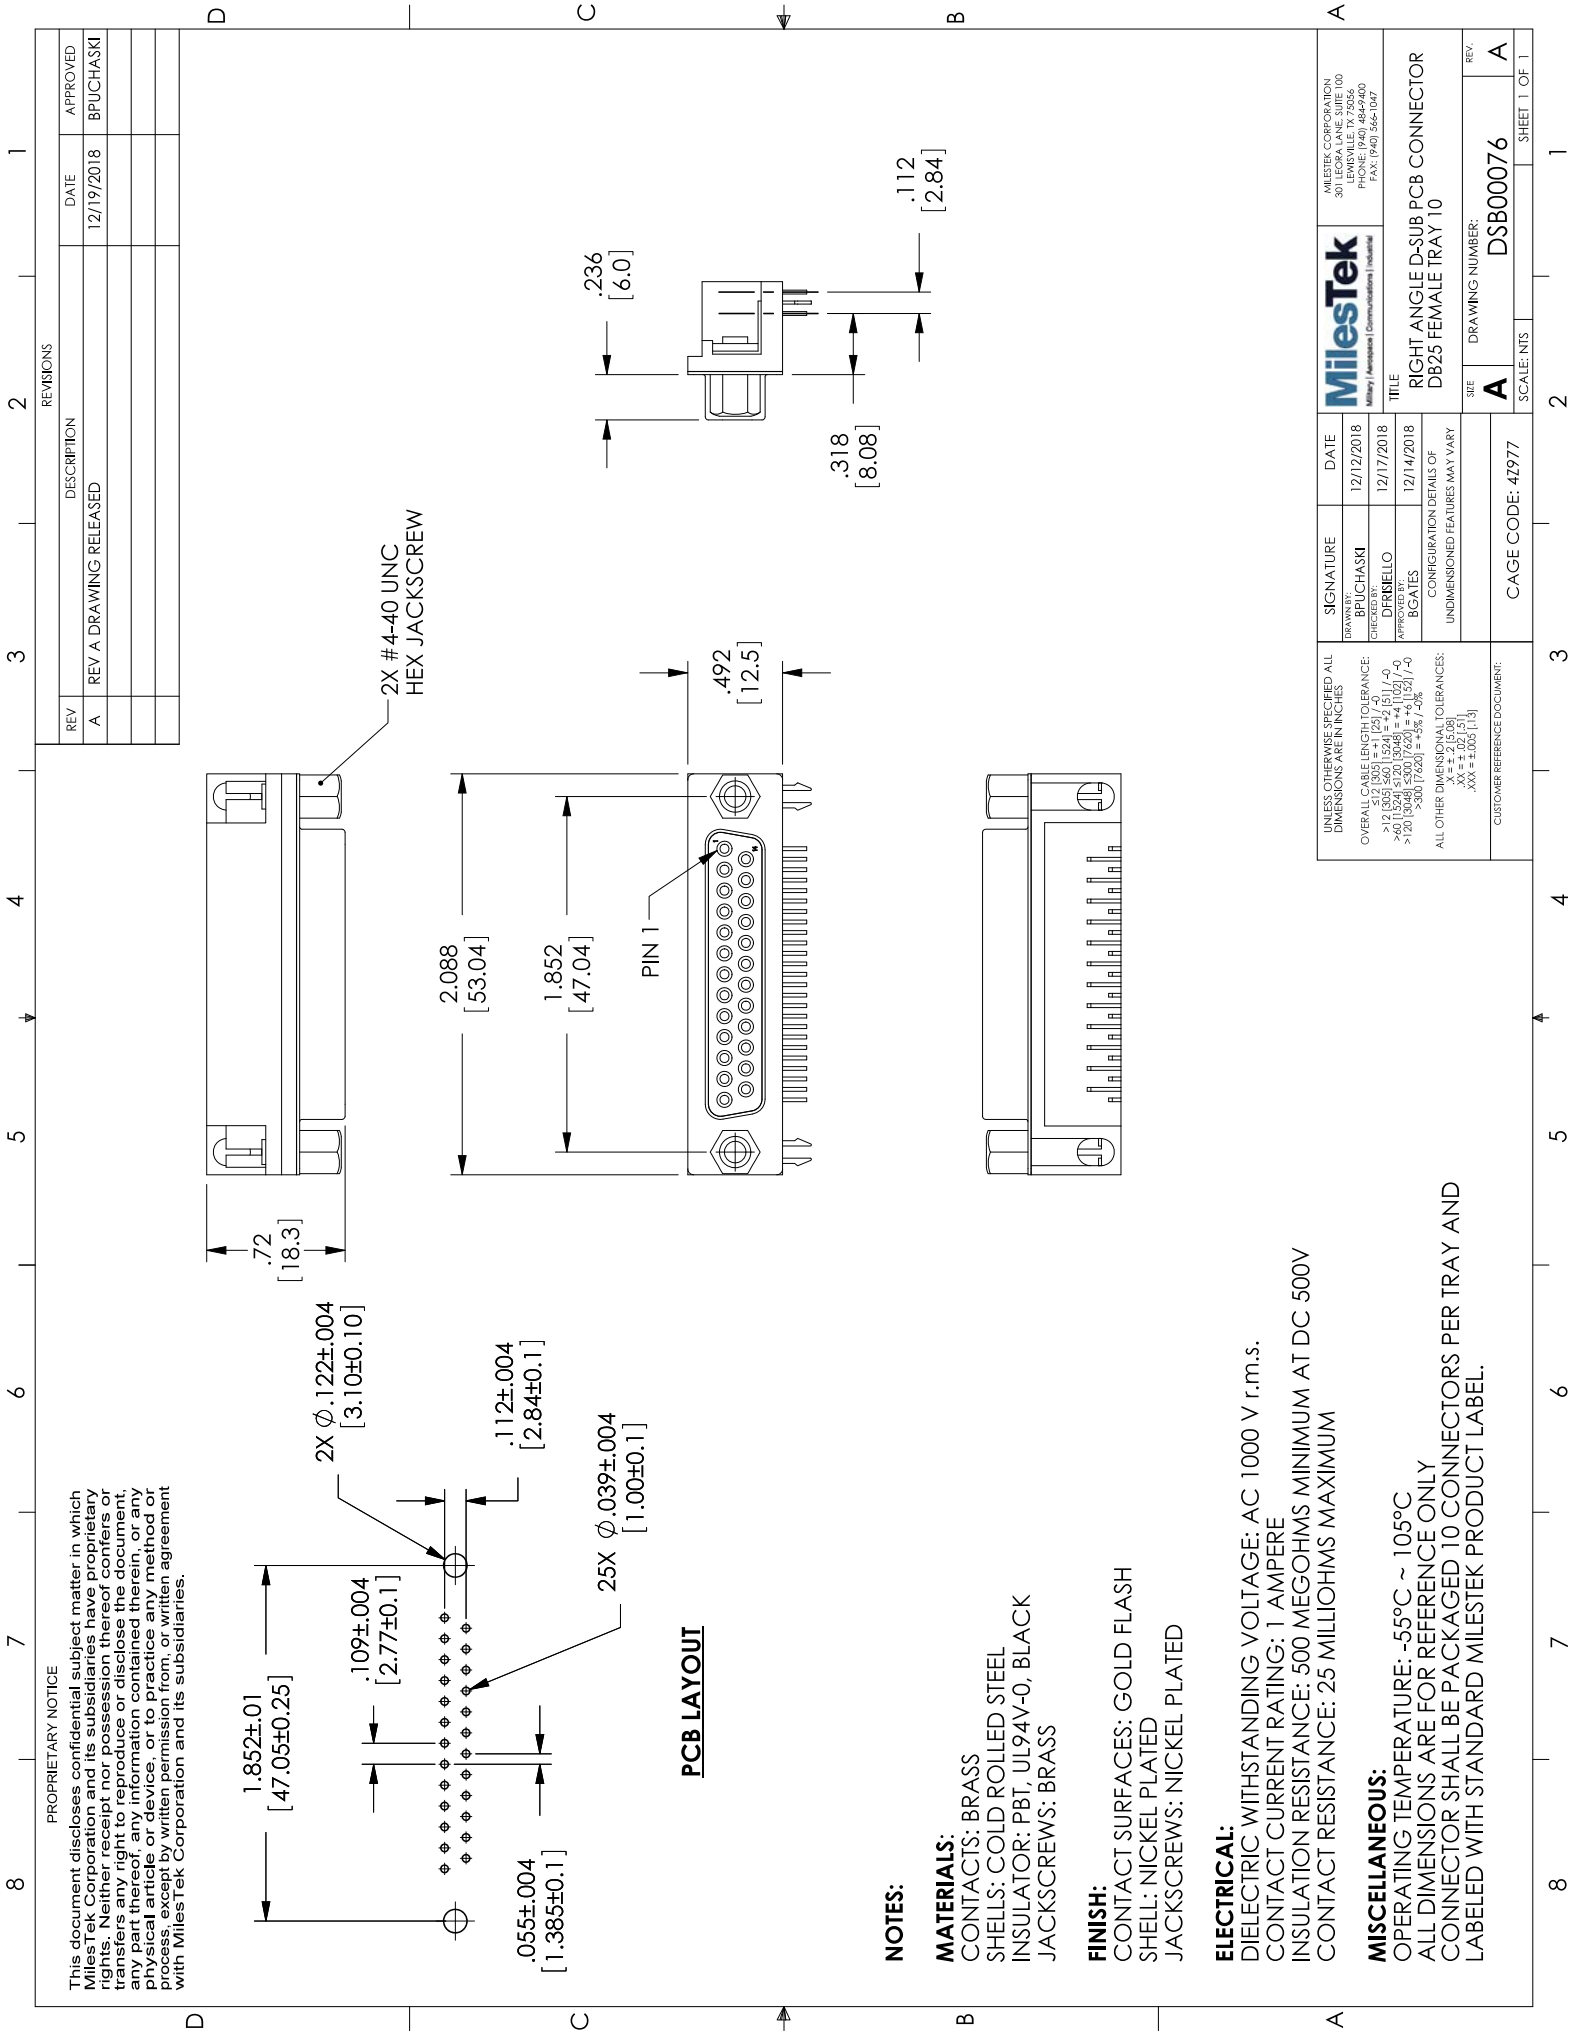

PROPRIETARY NOTICE

This document discloses confidential subject matter in which Miletex Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right, title, or interest in the subject matter, and any use of the information contained herein, in any physical article or device, or to practice any method or process, except by written permission from, or written agreement with Miletex Corporation and its subsidiaries.

NOTES:

MATERIALS:

CONTACTS: BRASS
SHELLS: COLD ROLLED STEEL
INSULATOR: PBT, UL94V-0, BLACK
JACKSCREWS: BRASS

FINISH:

CONTACT SURFACES: GOLD FLASH
SHELL: NICKEL PLATED
JACKSCREWS: NICKEL PLATED

ELECTRICAL:

DIELECTRIC WITHSTANDING VOLTAGE: AC 1000 V r.m.s.
CONTACT CURRENT RATING: 1 AMPERE
INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V
CONTACT RESISTANCE: 25 MILLIOHMS MAXIMUM

MISCELLANEOUS:

OPERATING TEMPERATURE: -55°C ~ 105°C
ALL DIMENSIONS ARE FOR REFERENCE ONLY
CONNECTOR SHALL BE PACKAGED 10 CONNECTORS PER TRAY AND
LABELED WITH STANDARD MILETEK PRODUCT LABEL.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SIGNATURE	DATE	 Military Aerospace Communications Industrial		MILESTEK CORPORATION 301 LEGRA LANE, SUITE 100 BOWSVILLE, TX 75066 PHONE: (940) 564-9400 FAX: (940) 564-1047
OVERALL CABLE LENGTH TOLERANCE: ≤ 10 [254] = +1 [25] / -0 ≤ 100 [2540] = +1 [10] / -0 ≤ 1000 [25400] = +1 [152] / -0 ≤ 5000 [127000] = +5% / -4%		BPUCHASKI	12/12/2018	TITLE		RIGHT ANGLE D-SUB PCB CONNECTOR DB25 FEMALE TRAY 10
ALL OTHER DIMENSIONAL TOLERANCES: XX = ±.015 [0.38] XX = ±.005 [0.13]		DPRIELLO	12/17/2018	APPROVED BY:		
CUSTOMER REFERENCE DOCUMENT:		BGATES	12/14/2018	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
CAGE CODE: 42977		DRAWING NUMBER:		REV.		A
SCALE: NTS		DSB00076		SHEET 1 OF 1		