


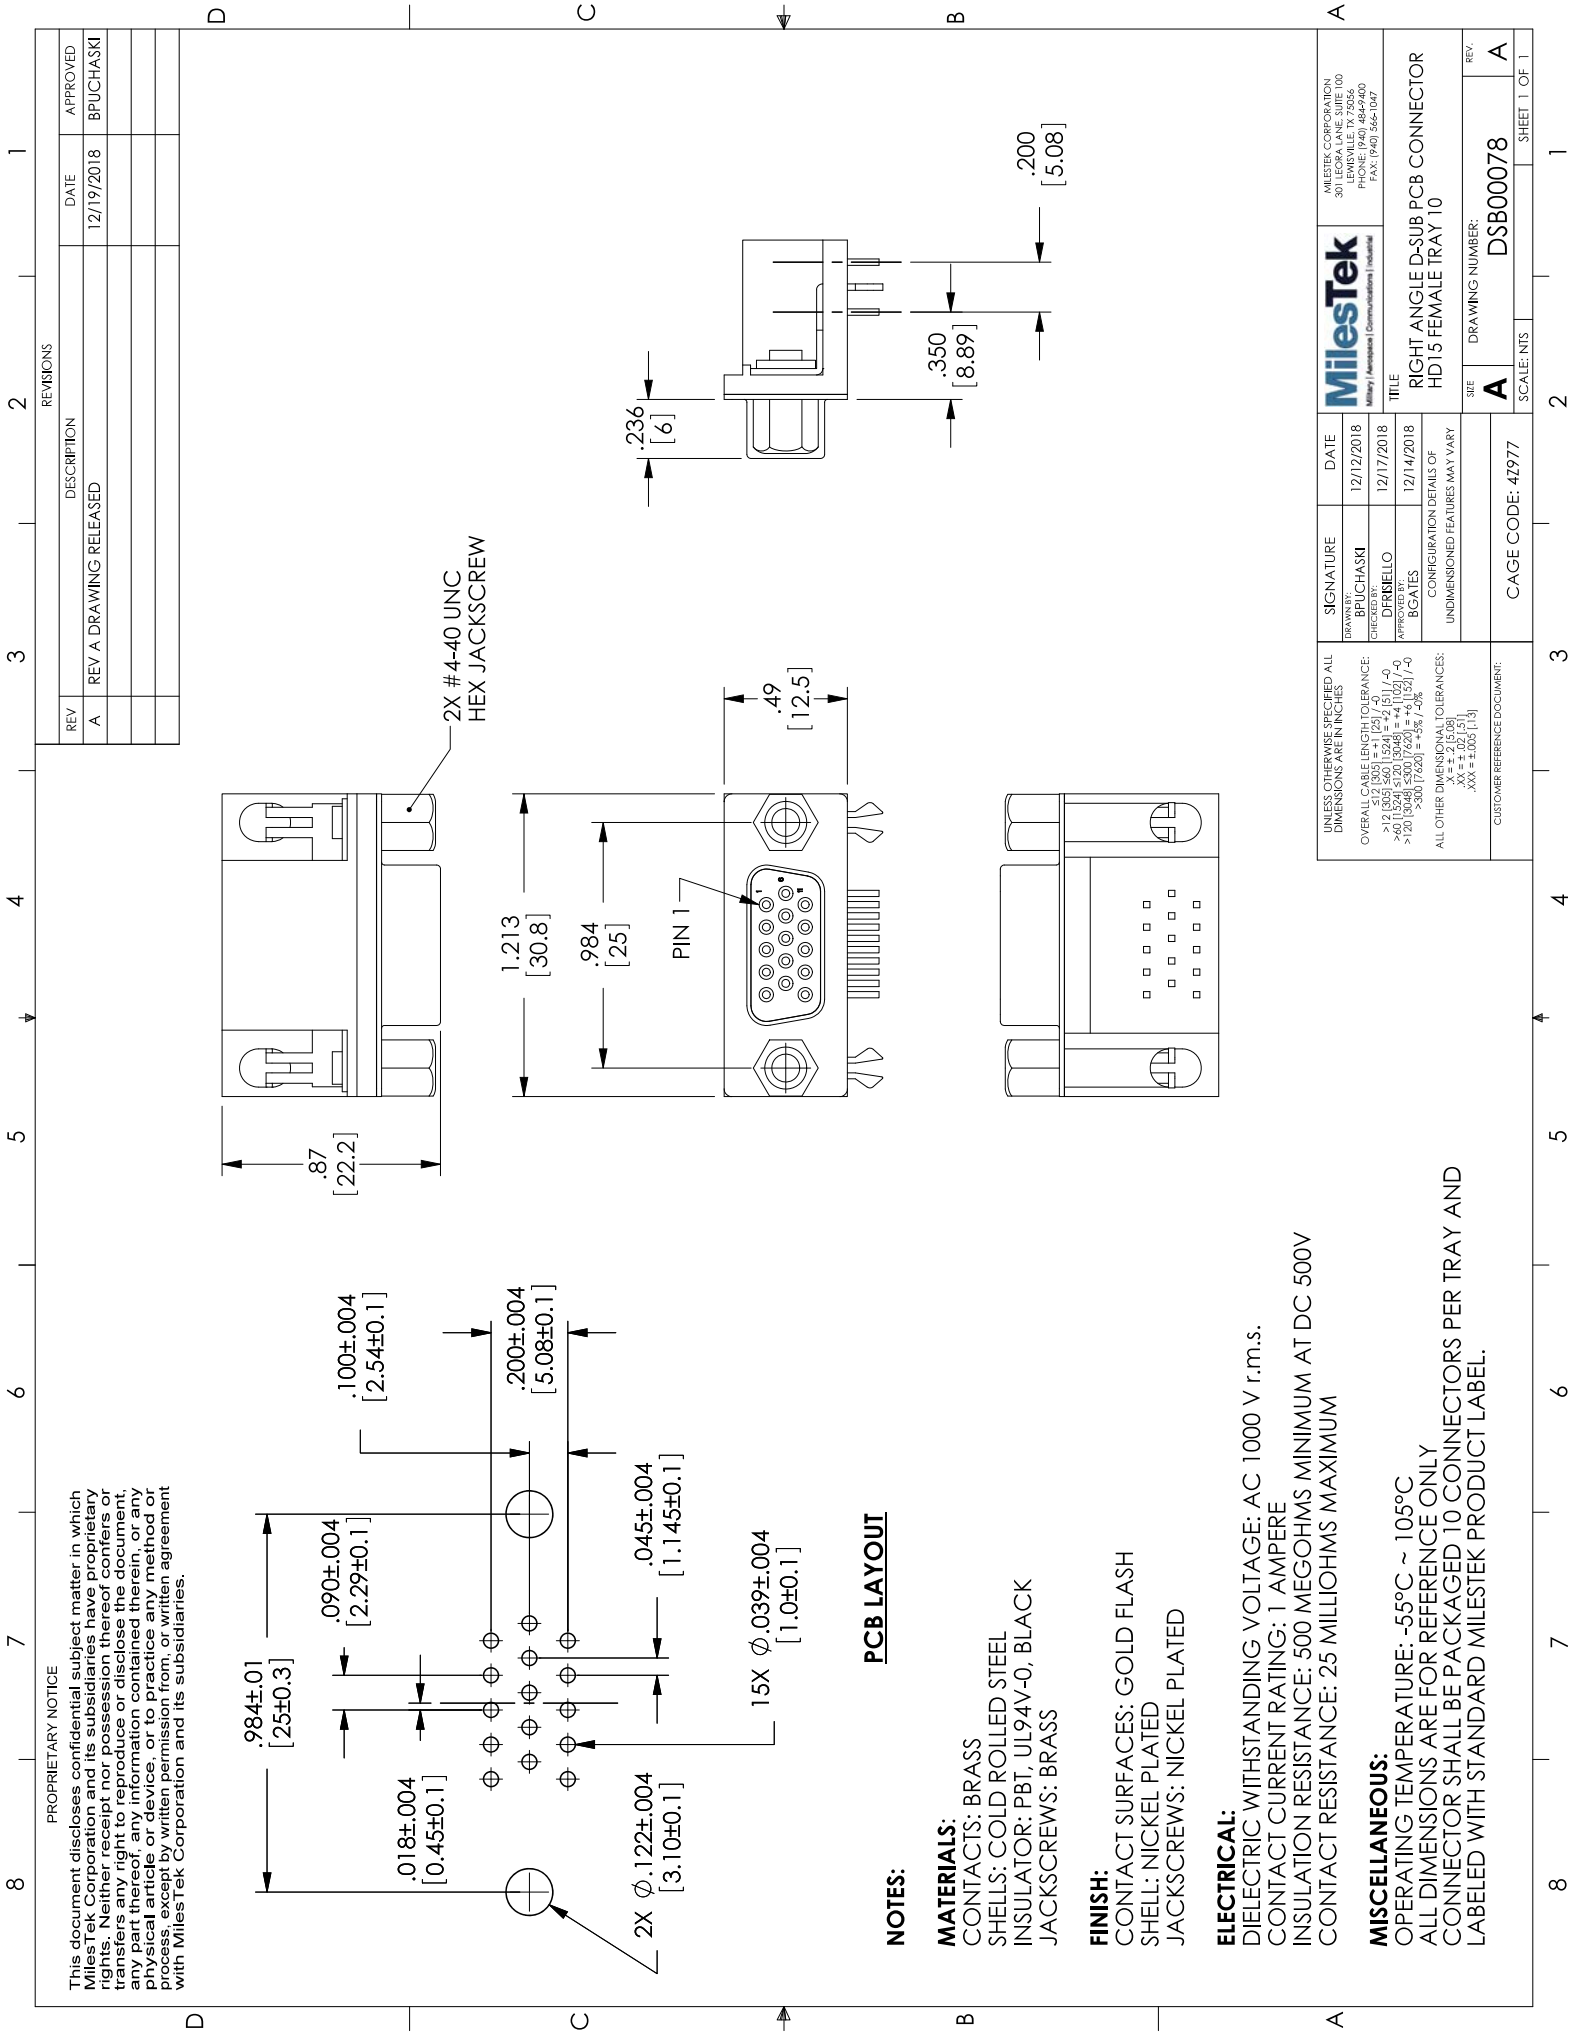

PROPRIETARY NOTICE

This document discloses confidential subject matter in which Miletex Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or warrants any right, title, or interest in the subject matter, and no part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without the prior written permission of Miletex Corporation. This document is the property of Miletex Corporation and its subsidiaries. It is to be used only for the purpose for which it was prepared and is not to be distributed outside the company or to be used in any other project, except by written permission from, or written agreement with Miletex Corporation and its subsidiaries.

NOTES:

MATERIALS:

CONTACTS: BRASS
SHELLS: COLD ROLLED STEEL
INSULATOR: PBT, UL94V-0, BLACK
JACKSCREWS: BRASS

FINISH:

CONTACT SURFACES: GOLD FLASH
SHELL: NICKEL PLATED
JACKSCREWS: NICKEL PLATED

ELECTRICAL:

DIELECTRIC WITHSTANDING VOLTAGE: AC 1000 V r.m.s.
CONTACT CURRENT RATING: 1 AMPERE
INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V
CONTACT RESISTANCE: 25 MILLIOHMS MAXIMUM

MISCELLANEOUS:

OPERATING TEMPERATURE: -55°C ~ 105°C
ALL DIMENSIONS ARE FOR REFERENCE ONLY
CONNECTOR SHALL BE PACKAGED 10 CONNECTORS PER TRAY AND
LABELED WITH STANDARD MILESTEK PRODUCT LABEL.

PCB LAYOUT