


This document discloses confidential subject matter in which Milestek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the subject matter, and all information contained herein, in any form, is the property of Milestek Corporation and its subsidiaries, and is to be used only for the specific purpose for which it was provided, and is not to be disclosed, copied, or otherwise used in any way without the prior written permission of Milestek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/19/2018	BPUCHASKI

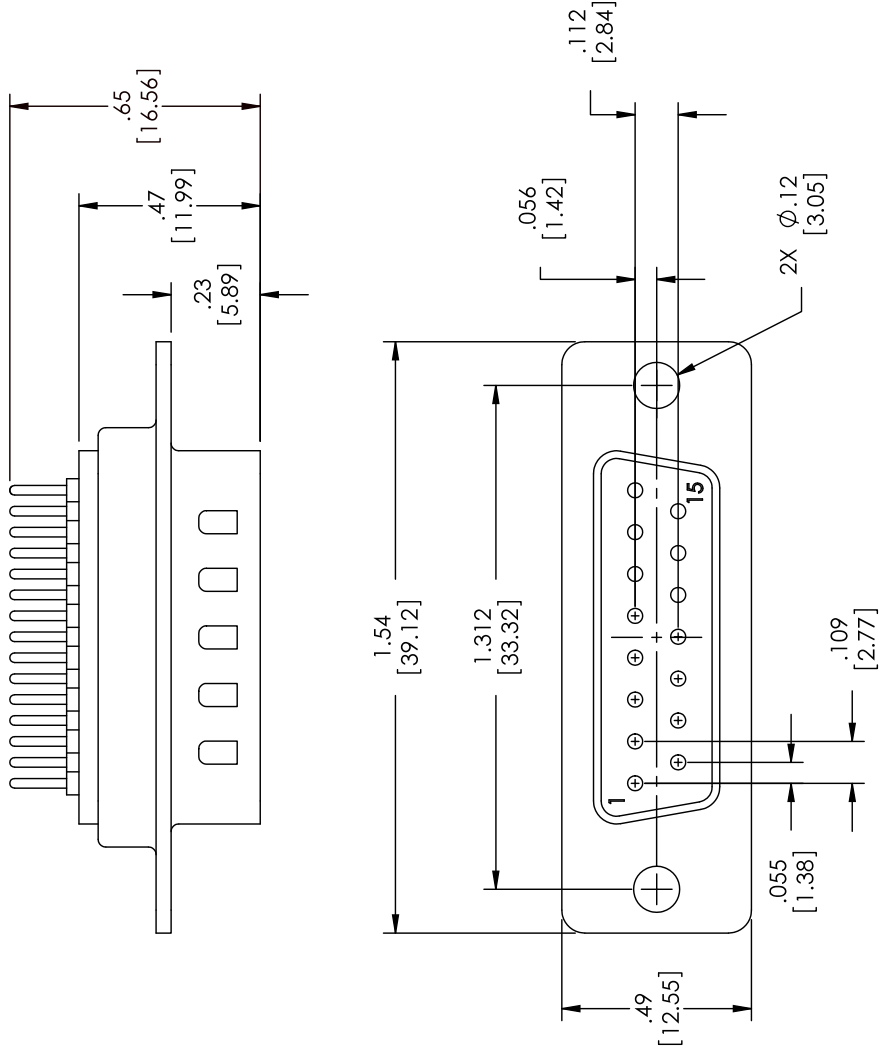

NOTES:

MATERIALS:

SHELL: COLD ROLLED STEEL
CONTACTS: BRASS
INSULATOR: THERMOPLASTIC PBT, UL94V-0

FINISH:

SHELL: TIN PLATED
CONTACT SURFACES: GOLD

ELECTRICAL:

CURRENT RATING: 5 AMP
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC
INSULATION RESISTANCE: 1000 MΩ PER MINUTE @ 500 VDC
CONTACT RESISTANCE: 20mΩ MAX

MISCELLANEOUS:

OPERATING TEMPERATURE: -55°C ~ +105°C
ALL DIMENSIONS ARE FOR REFERENCE ONLY
CONNECTOR SHALL BE PACKAGED IN ACCORDANCE WITH
MILESTEK SPEC. PS-0054.

MilesTek MILESTEK CORPORATION 301 LEONA LANE, SUITE 100 LEWISVILLE, TX 75056 PHONE: (940) 484-9400 FAX: (940) 564-1047		SIGNATURE	DATE
		BPUCHASKI	12/12/2018
		DFRNELLO	12/17/2018
		BGATES	12/14/2018
APPROVED BY:		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		CAGE CODE: 42977	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [.305] = +.12 / -.09 ≤12 [.			