



8 7 6 5 4 3 2 1

PROPRIETARY NOTICE

This document discloses confidential subject matter in which Miletex Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right to reproduce, distribute, disclose, or use, in any form, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with Miletex Corporation and its subsidiaries.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/19/2018	BPUCHASKI

D C B A

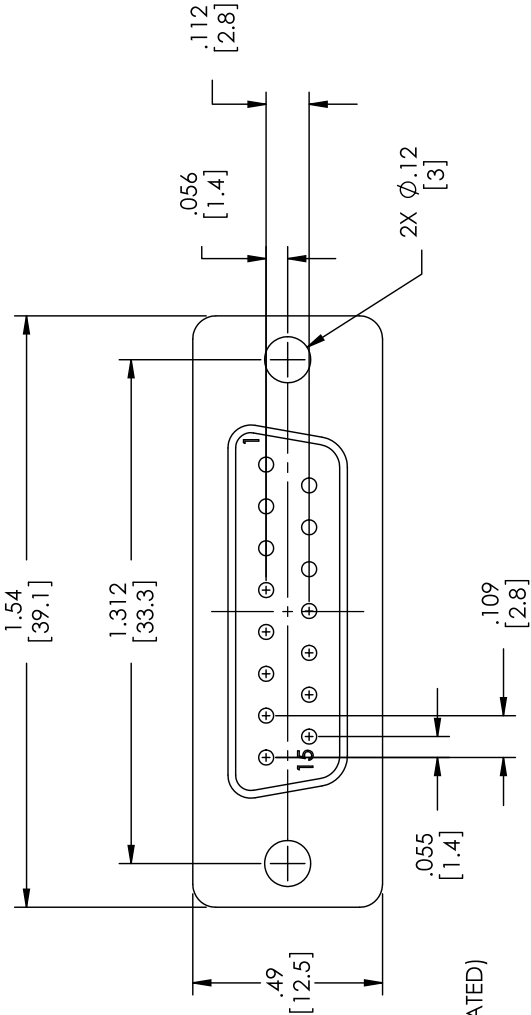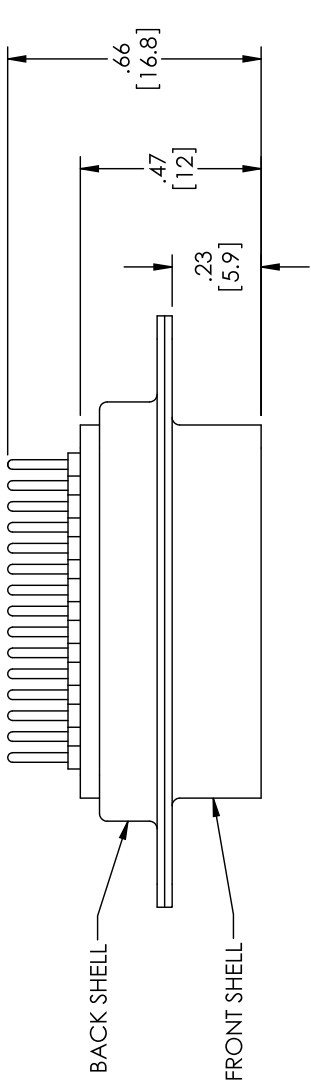

NOTES:

MATERIAL:
SHELL: COLD ROLLED STEEL
CONTACTS: BRASS
INSULATOR: THERMOPLASTIC PBT (UL 94V-0 RATED)

FINISH:
SHELL: FRONT SHELL: NICKEL PLATED,
BACK SHELL: TIN PLATED
MATING CONTACTS: GOLD SELECTIVE PLATED

ELECTRICAL:
CURRENT RATING: 5 AMP
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC
INSULATION RESISTANCE: 1000 MΩ PER MINUTE @ 500 VDC
CONTACT RESISTANCE: 20mΩ MAX

ENVIRONMENTAL:
OPERATIONAL TEMPERATURE RANGE: -55°C TO +105°C
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

MilesTek Military Aerospace Communications Industrial		SIGNATURE	DATE
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		DRAWN BY: BPUCHASKI	12/12/2018
OVERALL CABLE LENGTH TOLERANCE: >10 [254] ≤ 10 [254] = ±.03 / -0 >10 [254] ≤ 10 [254] = ±.03 / -0 >10 [254] ≤ 10 [254] = ±.03 / -0		CHECKED BY: DFRUELO	12/17/2018
ALL OTHER DIMENSIONAL TOLERANCES: XX = ±.05 [1.3] XXX = ±.005 [0.13]		APPROVED BY: BGATES	12/14/2018
TITLE		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
MILESTEK CORPORATION 301 E. MAIN ST., SUITE 100 PHOENIX, AZ 85001 PHONE: (602) 484-9400 FAX: (602) 564-1047		PC TERMINATION D-SUB CONNECTOR DB15 FEMALE	
CAGE CODE: 42977		DRAWING NUMBER: DSB000084	
CUSTOMER REFERENCE DOCUMENT:		REV: A	
SCALE: NTS		SHEET 1 OF 1	

8 7 6 5 4 3 2 1