


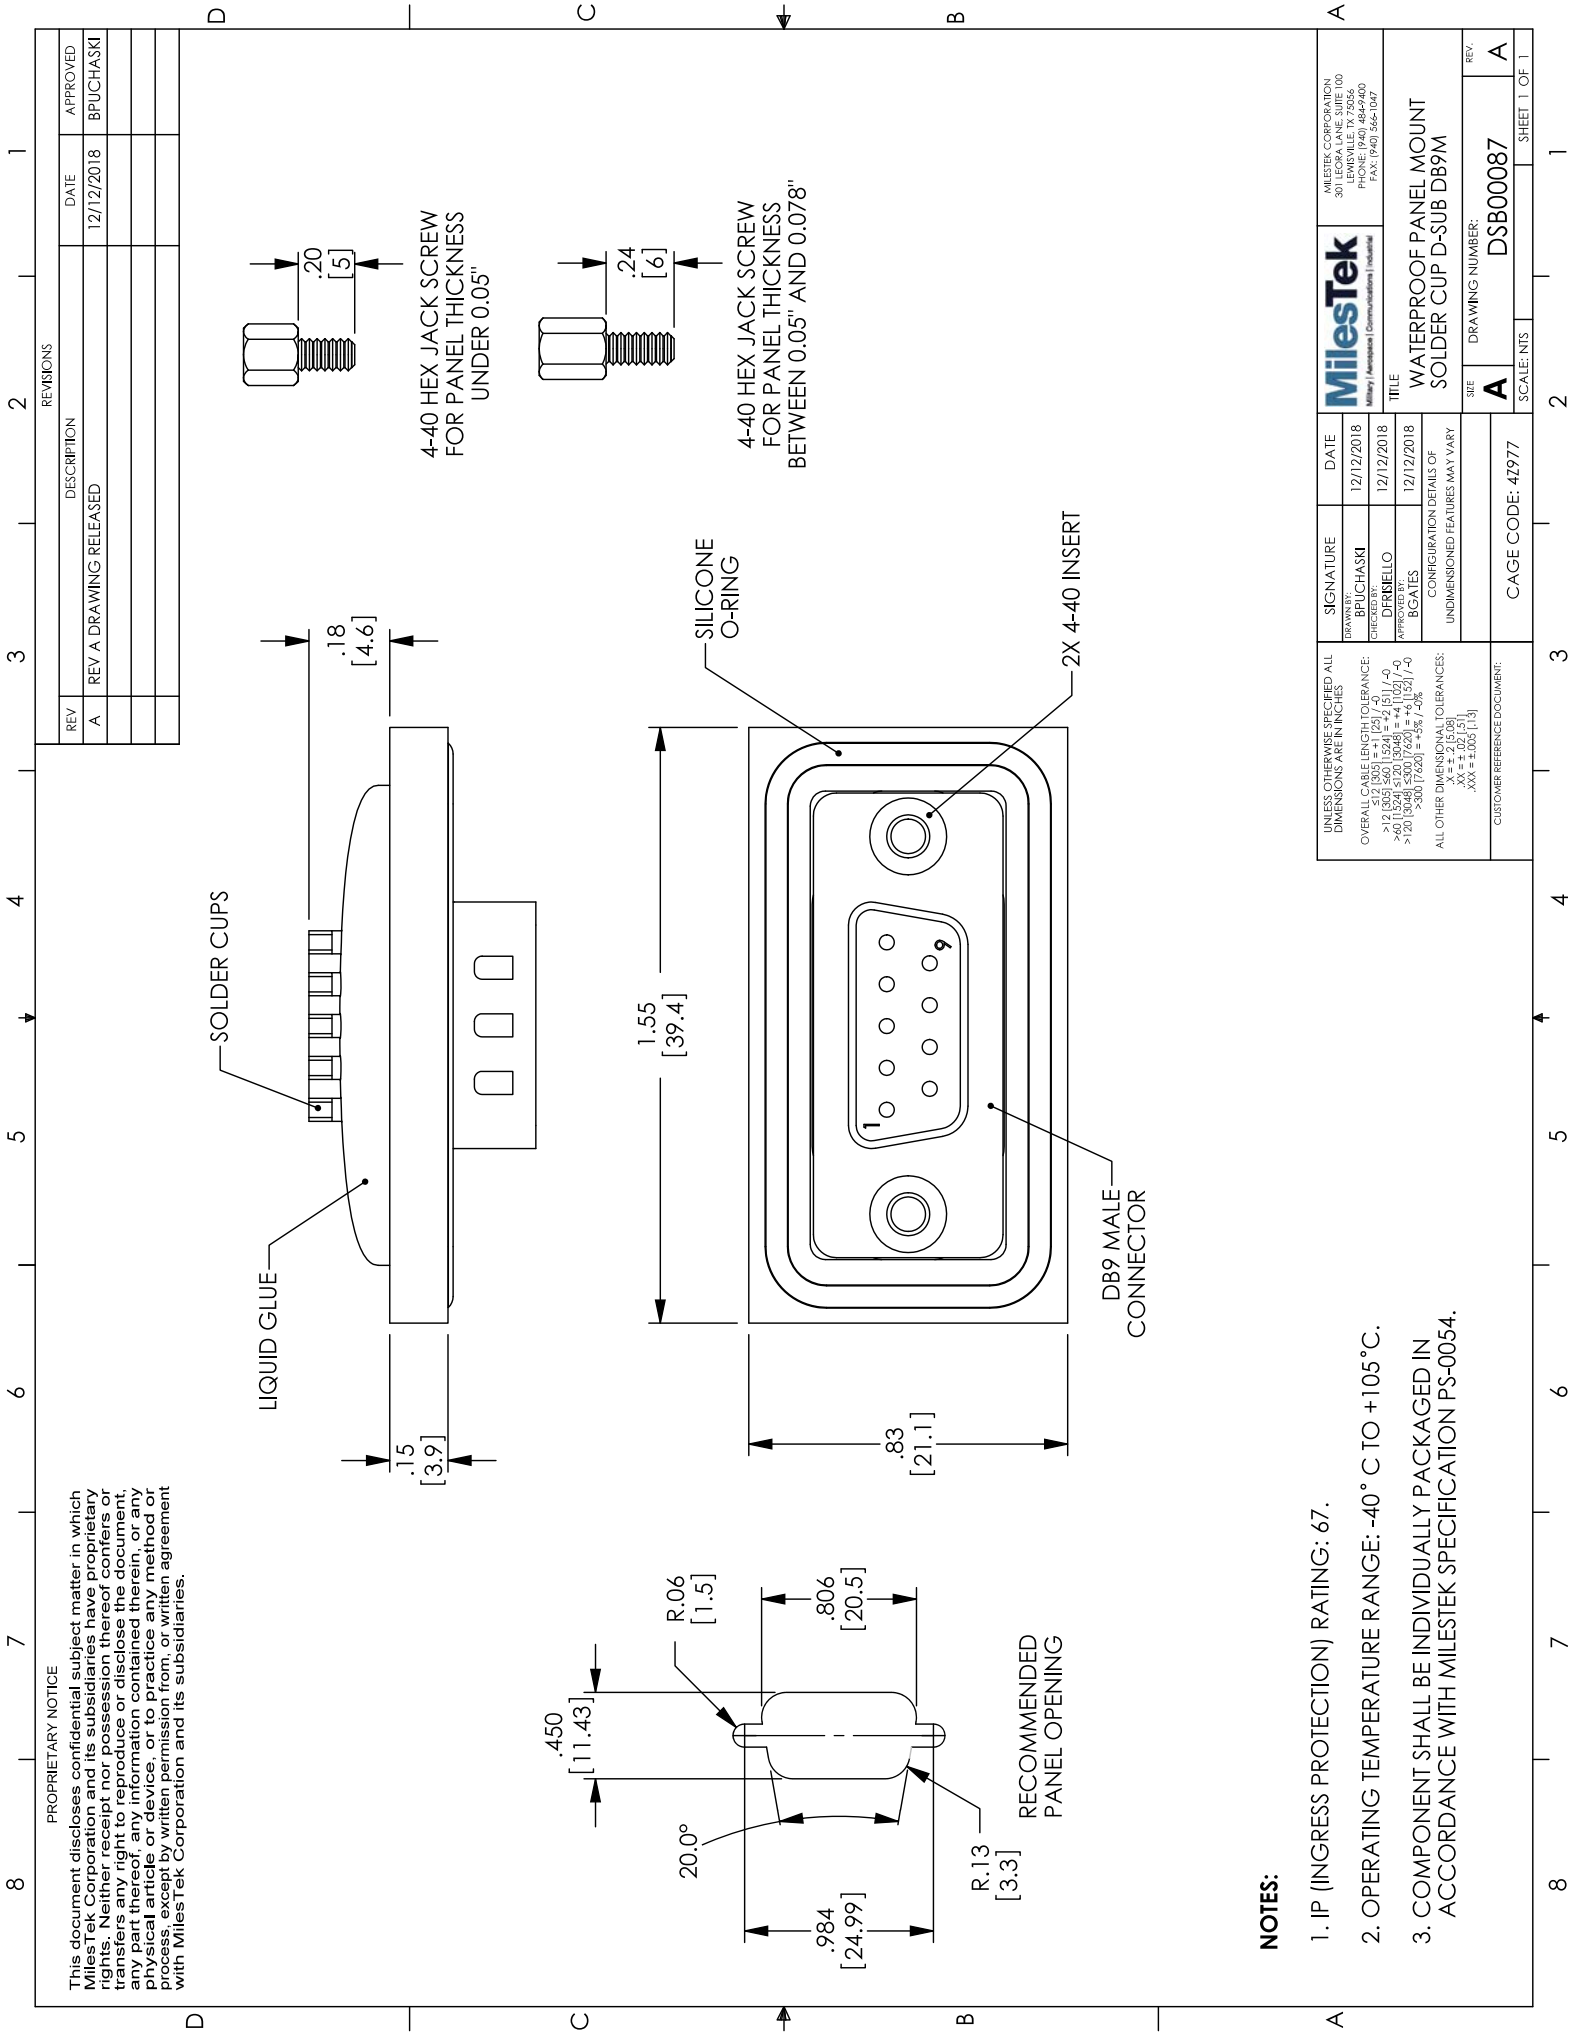

NOTES:

1. IP (INGRESS PROTECTION) RATING: 67.
2. OPERATING TEMPERATURE RANGE: -40 ° C TO +105 ° C.
3. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: ≤ 9" (228.6) = ± .125 / -0 > 9" (228.6) ≤ 12" (304.8) = ± .125 / -0 > 12" (304.8) ≤ 30" (762.0) = ± .125 / -0 > 30" (762.0) = +5% / -5% ALL OTHER DIMENSIONAL TOLERANCES: XX = ± .015 [0.38] XXX = ± .005 [0.13] CUSTOMER REFERENCE DOCUMENT:		SIGNATURE		DATE	MilesTek Military / Aerospace / Communications / Industrial MILESTEK CORPORATION 301 LEGRA LANE, SUITE 100 LEWISVILLE, TX 75056 PHONE: (940) 484-9400 FAX: (940) 564-1047
		DRAWN BY: BPUCHASKI		12/12/2018	
		CHECKED BY: DFRUELO		12/12/2018	
		APPROVED BY: BGATES		12/12/2018	
		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			
CAGE CODE: 4Z977		SIZE	DRAWING NUMBER:		REV.
		A	DSB00087		A
		SCALE:		NTS	SHEET 1 OF 1