


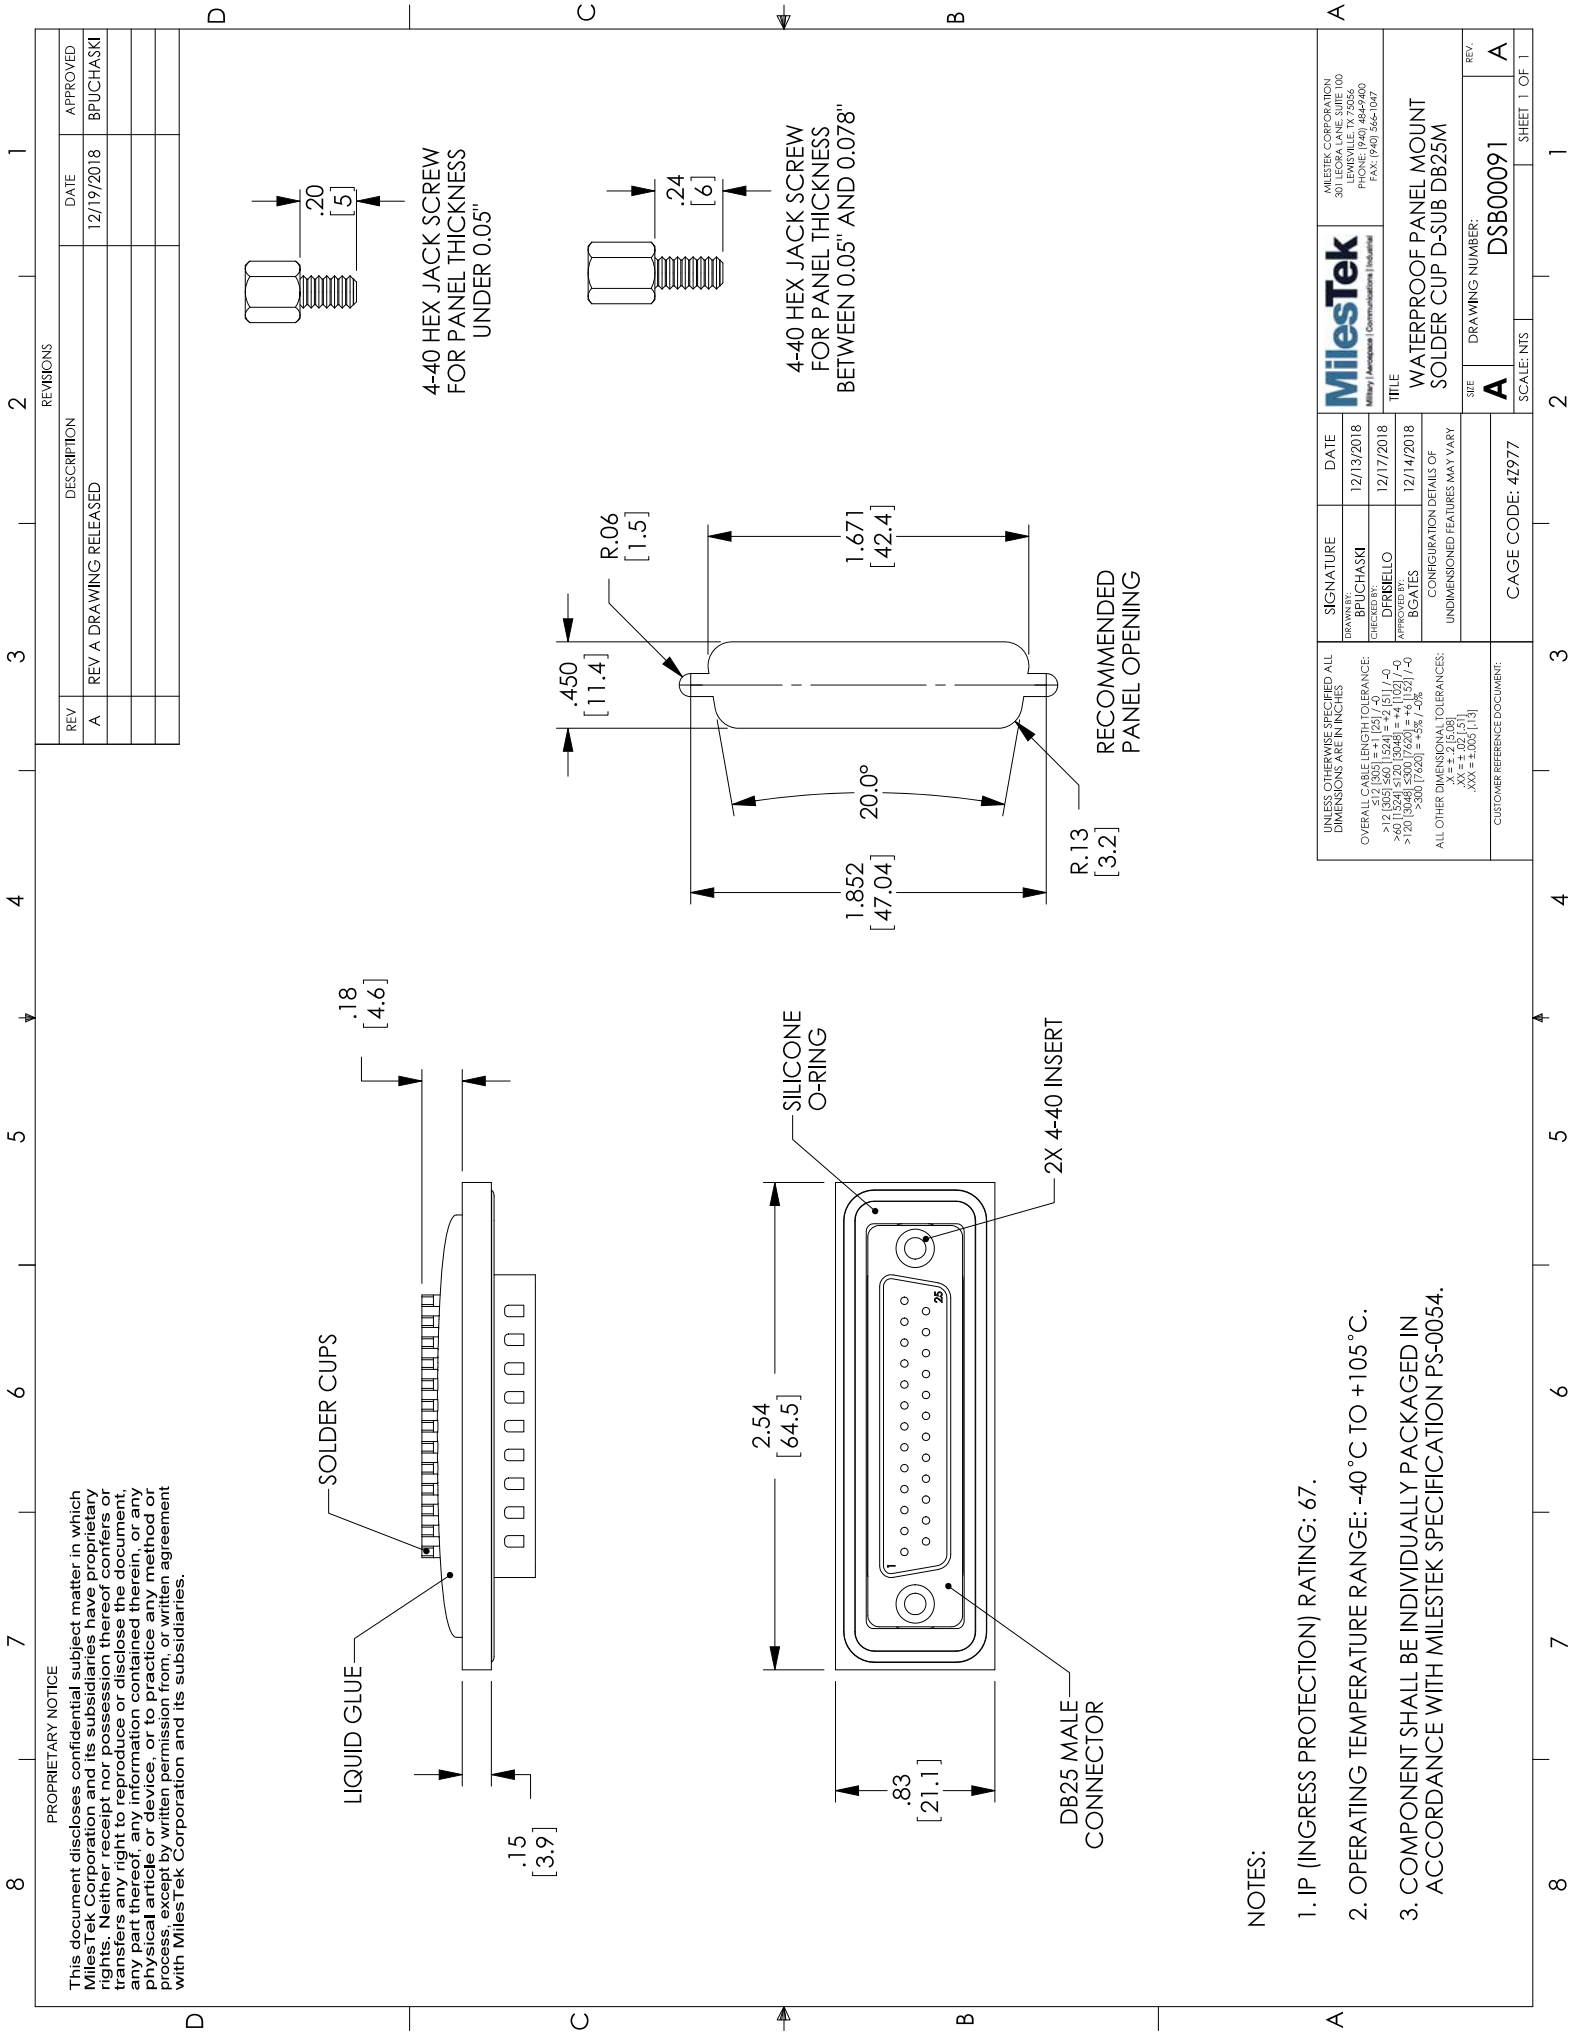

PROPRIETARY NOTICE

This document discloses confidential subject matter in which Milestek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right, title, or interest in the subject matter, and any disclosure of the information contained therein, in any form, to any person, without the written consent of Milestek Corporation, is prohibited. This document is the property of Milestek Corporation and is to be used only for the purpose for which it was provided. It is to be returned to Milestek Corporation upon request, except by written permission from, or written agreement with Milestek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/19/2018	BPUCHASKI

Milestek Milestek Corporation		MILESTEK CORPORATION 301 E. BROADWAY, SUITE 100 PHOENIX, AZ 85004 PHONE: (940) 484-9400 FAX: (940) 566-1047	
SIGNATURE		DATE	
DRAWN BY: BPUCHASKI		12/13/2018	
CHECKED BY: DFRNELLO		12/17/2018	
APPROVED BY: BGATES		12/14/2018	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		TITLE	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: ≤ 10 [254] ± .1 [2.5] > 10 [254] ± .1 [2.5] ≤ 100 [2540] ± .1 [2.5] > 100 [2540] ± .1 [2.5] ≤ 500 [12700] ± .1 [2.5] > 500 [12700] ± .1 [2.5] ALL OTHER DIMENSIONAL TOLERANCES: XX ± .01 [0.25] XXX ± .005 [0.13]		WATERPROOF PANEL MOUNT SOLDER CUP D-SUB DB25M	
CUSTOMER REFERENCE DOCUMENT:		CAGE CODE: 4Z977	
SITE		DRAWING NUMBER:	
A		DSB00091	
SCALE: NTS		REV. A	
2		SHEET 1 OF 1	

NOTES:

1. IP (INGRESS PROTECTION) RATING: 67.
2. OPERATING TEMPERATURE RANGE: -40 °C TO +105 °C.
3. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.