


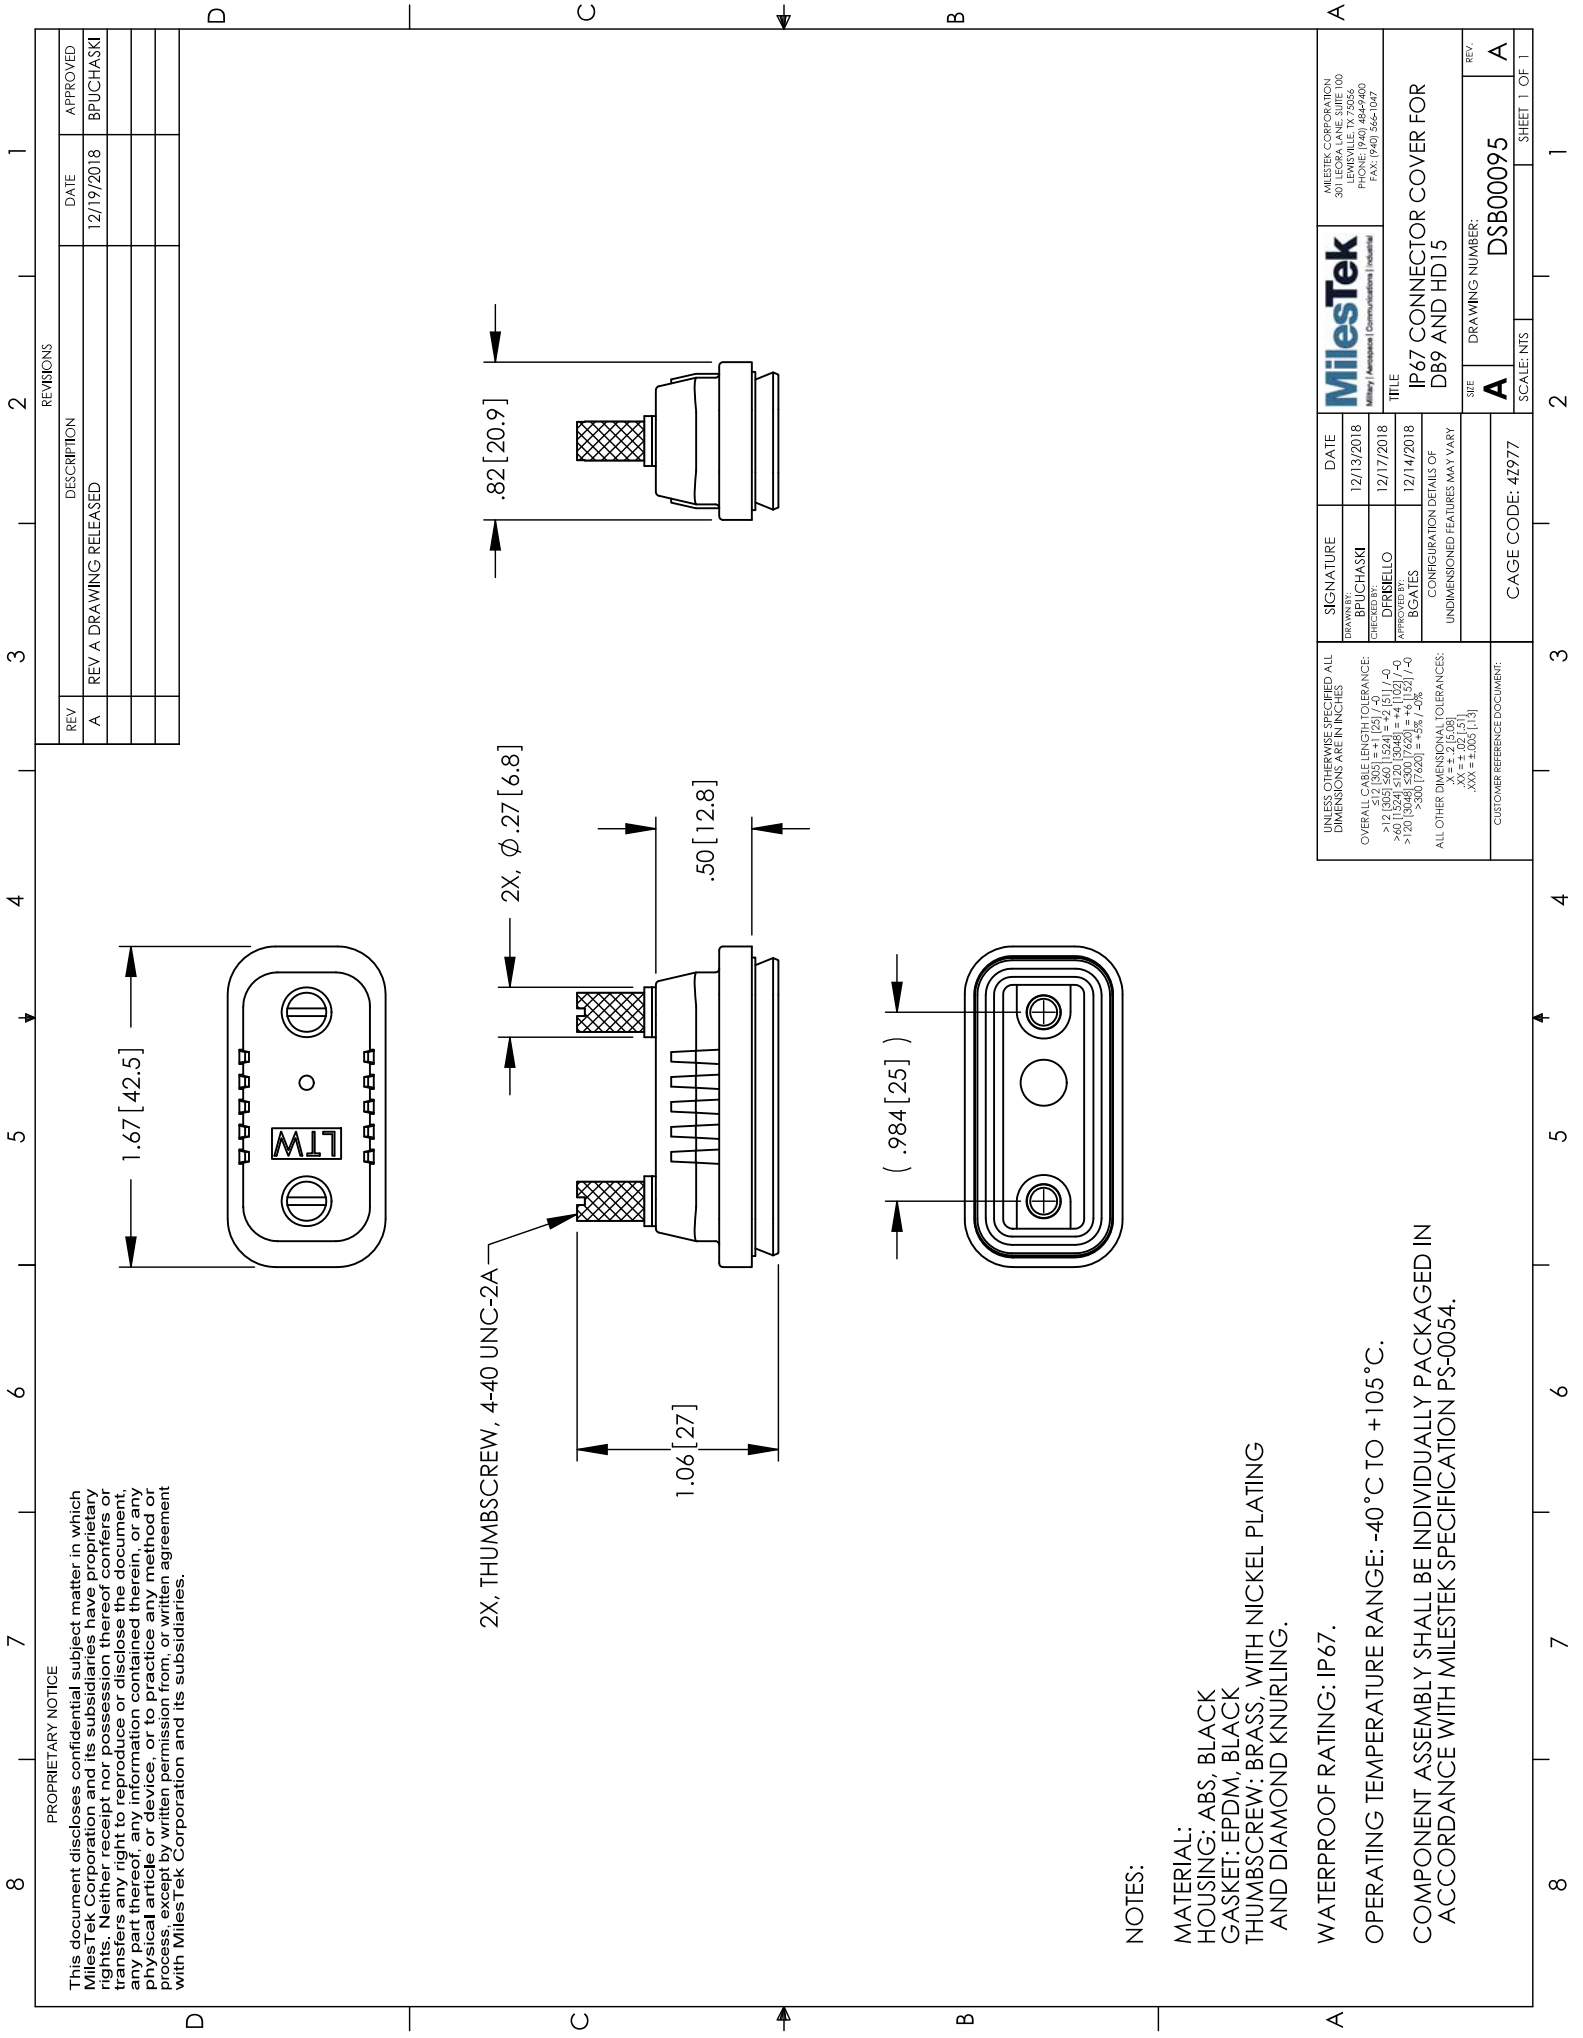

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or distribute the content, any part thereof, or information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/19/2018	BPUCHASKI

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
≤ 12 [305] = ± .125 [3.175]
> 12 [305] ≤ 24 [609.6] = ± .150 [3.81]
> 24 [609.6] ≤ 30 [762] = ± .150 [3.81]
> 30 [762] ≤ 36 [914.4] = ± .150 [3.81]
ALL OTHER DIMENSIONAL TOLERANCES:
XX = ± .015 [0.38]
XXX = ± .005 [0.13]

CUSTOMER REFERENCE DOCUMENT:

SCALE: NTS

SHEET 1 OF 1

REV. A

DRAWING NUMBER: DSB00095

TITLE: IP67 CONNECTOR COVER FOR DB9 AND HD15

MilesTek
MilesTek Corporation | Milwaukee | Madison | Indianapolis

MILESTEK CORPORATION
10000 W. WISCONSIN AVE., SUITE 100
MILWAUKEE, WI 53224
PHONE: (940) 464-9400
FAX: (940) 564-1047

NOTES:

MATERIAL: ABS, BLACK

HOUSING: EPDM, BLACK

GASKET: EPDM, BLACK

THUMBSCREW: BRASS, WITH NICKEL PLATING

AND DIAMOND KNURLING.

WATERPROOF RATING: IP67.

OPERATING TEMPERATURE RANGE: -40 °C TO +105 °C.

COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.