


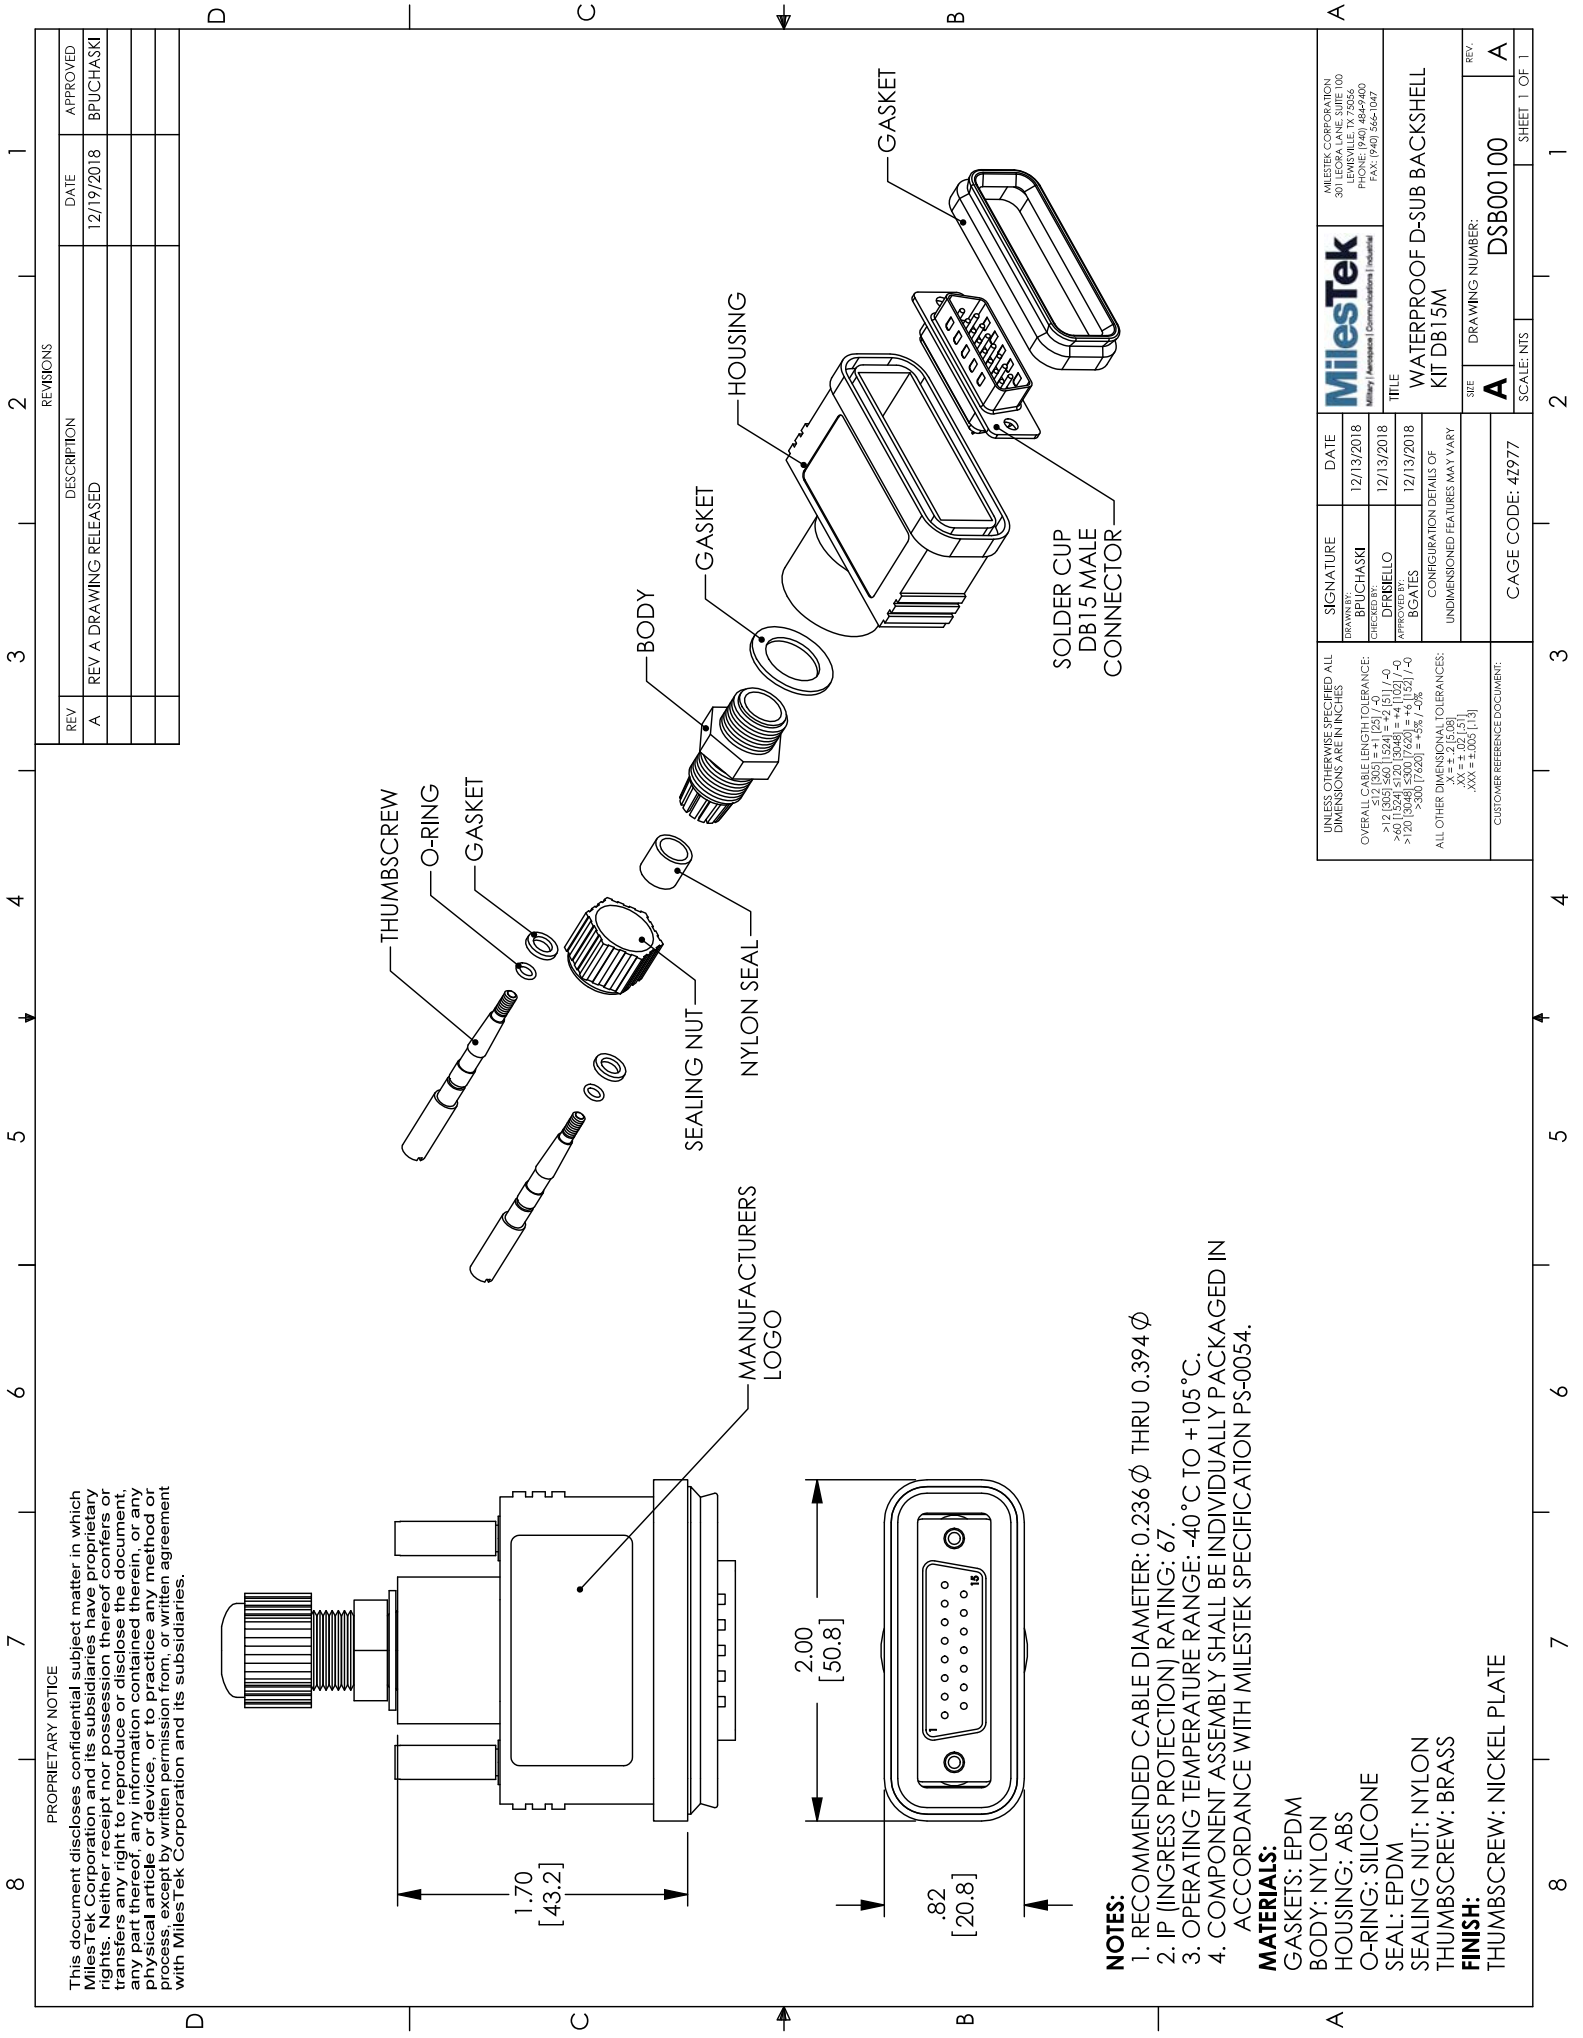

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilestTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right, title, or interest in the subject matter, and any use of the information contained herein, in any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilestTek Corporation and its subsidiaries.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/19/2018	BPUCHASKI

- NOTES:**
1. RECOMMENDED CABLE DIAMETER: 0.236 Ø THRU 0.394 Ø
 2. IP (INGRESS PROTECTION) RATING: 67.
 3. OPERATING TEMPERATURE RANGE: -40°C TO +105°C.
 4. COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTTEK SPECIFICATION PS-0054.

MATERIALS:

- GASKETS: EPDM
 - BODY: NYLON
 - HOUSING: ABS
 - O-RING: SILICONE
 - SEAL: EPDM
 - SEALING NUT: NYLON
 - THUMBSCREW: BRASS
- FINISH:**
- THUMBSCREW: NICKEL PLATE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SIGNATURE	DATE
DRAWN BY: BPUCHASKI		12/13/2018	
CHECKED BY: DFRUELO		12/13/2018	
APPROVED BY: BGATES		12/13/2018	
OVERALL CABLE LENGTH TOLERANCE:		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
>10 [254] ≤ 20 [508] = ±.01 [0.25]			
>20 [508] ≤ 50 [1270] = ±.01 [0.25]			
>50 [1270] ≤ 100 [2540] = ±.01 [0.25]			
>100 [2540] ≤ 500 [12700] = ±.01 [0.25]			
>500 [12700] ≤ 1000 [25400] = ±.01 [0.25]			
ALL OTHER DIMENSIONAL TOLERANCES:			
XX = ±.01 [0.25]			
XXX = ±.005 [0.13]			
CUSTOMER REFERENCE DOCUMENT:		CAGE CODE: 4Z977	
		SCALE: NTS	
		REV. A	
		DRAWING NUMBER: DSB00100	
		SHEET 1 OF 1	

MilestTek
Military | Aerospace | Communications | Industrial

WATERPROOF D-SUB BACKSHELL KIT DB15M

MILESTTEK CORPORATION
301 E. MAIN ST., SUITE 100
PHOENIX, AZ 85001
PHONE: (602) 484-4400
FAX: (602) 564-1047