


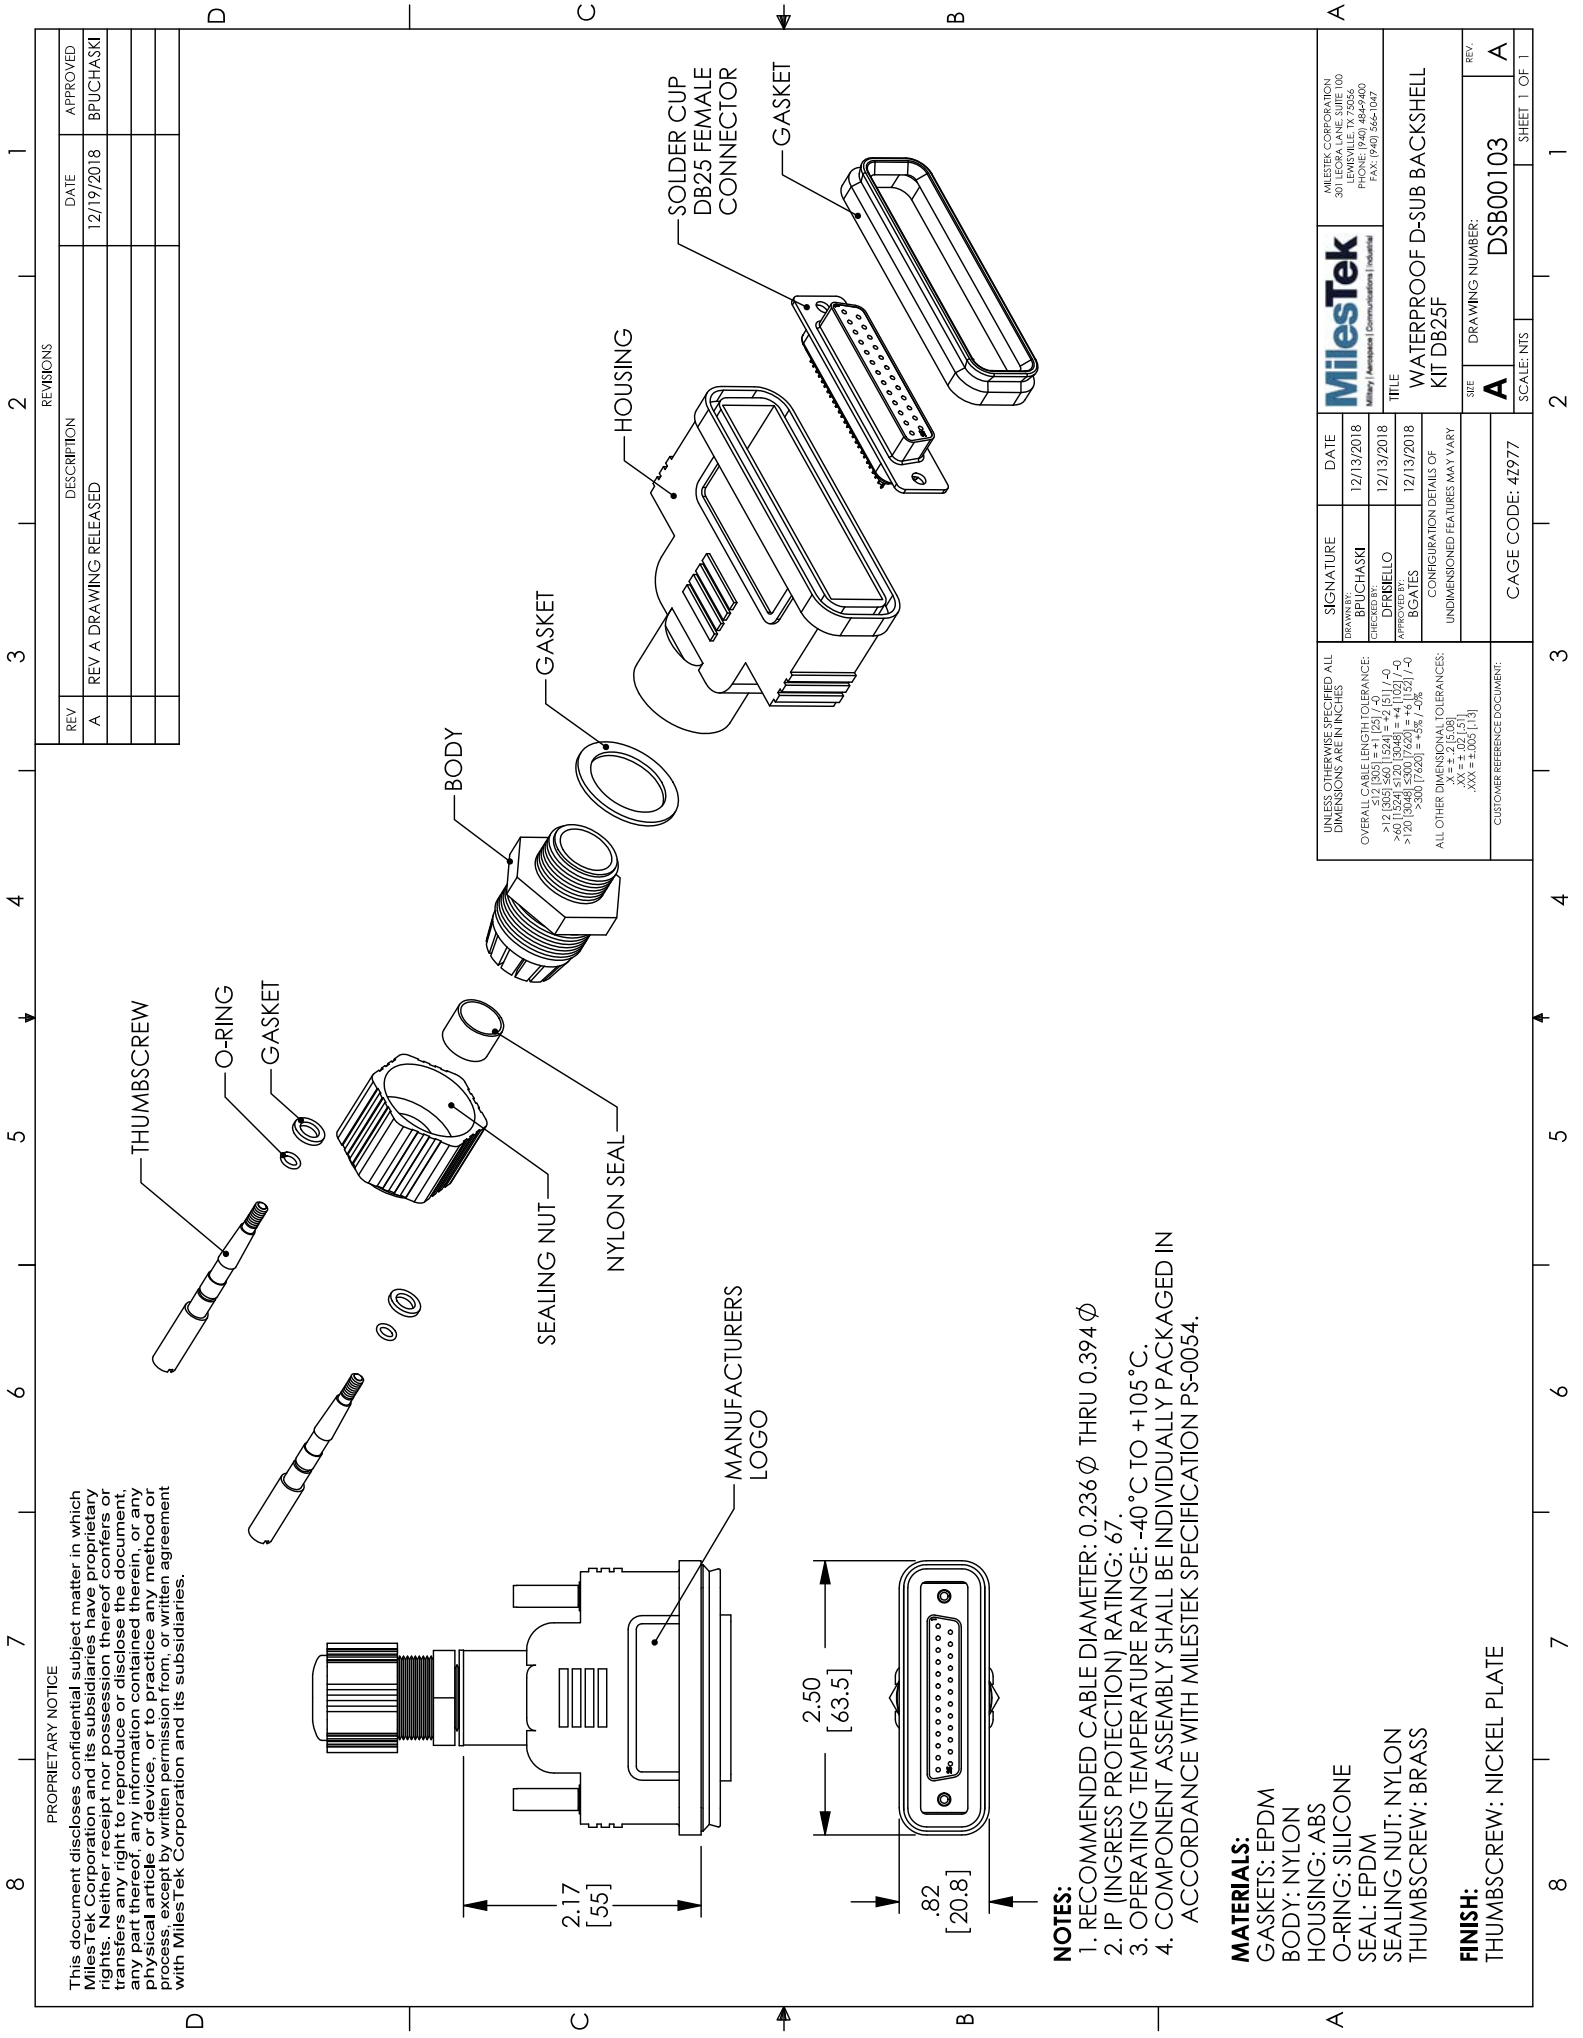

PROPRIETARY NOTICE

This document discloses confidential subject matter in which Miletex Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or assigns the right to use, reproduce, or otherwise disclose any part thereof, or any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with Miletex Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/19/2018	BPUCHASKI

- NOTES:**
1. RECOMMENDED CABLE DIAMETER: 0.236 Ø THRU 0.394 Ø
 2. IP (INGRESS PROTECTION) RATING: 67.
 3. OPERATING TEMPERATURE RANGE: -40 °C TO +105 °C.
 4. COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEX SPECIFICATION PS-0054.

MATERIALS:

- GASKETS: EPDM
- BODY: NYLON
- HOUSING: ABS
- O-RING: SILICONE
- SEAL: EPDM
- SEALING NUT: NYLON
- THUMBSCREW: BRASS

FINISH:

THUMBSCREW: NICKEL PLATE

MilesTek Military Aerospace Communications Industrial		SIGNATURE	DATE
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		DRAWN BY: BPUCHASKI	12/13/2018
OVERALL CABLE LENGTH TOLERANCE:		CHECKED BY: DFRNELLO	12/13/2018
>10 [253] = +1 [25] / -0		APPROVED BY: BGATES	12/13/2018
>10 [253] <10 [25] = +1 [25] / -0		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
>10 [253] <10 [25] = +1 [25] / -0		ALL OTHER DIMENSIONAL TOLERANCES:	
>120 [3048] <500 [12700] = +1 [152] / -0		XX = ±.015 [0.38]	
>500 [12700] = +5% / -5%		XXX = ±.005 [0.13]	
TITLE		CAGE CODE: 42977	
WATERPROOF D-SUB BACKSHELL KIT DB25F		CUSTOMER REFERENCE DOCUMENT:	
MILESTEX CORPORATION 301 E. MAIN ST. SUITE 100 PHOENIX, AZ 85001 PHONE: (602) 484-9400 FAX: (602) 564-1047		DRAWING NUMBER: DSB00103	
REV.		SCALE: NTS	
A		SHEET 1 OF 1	