


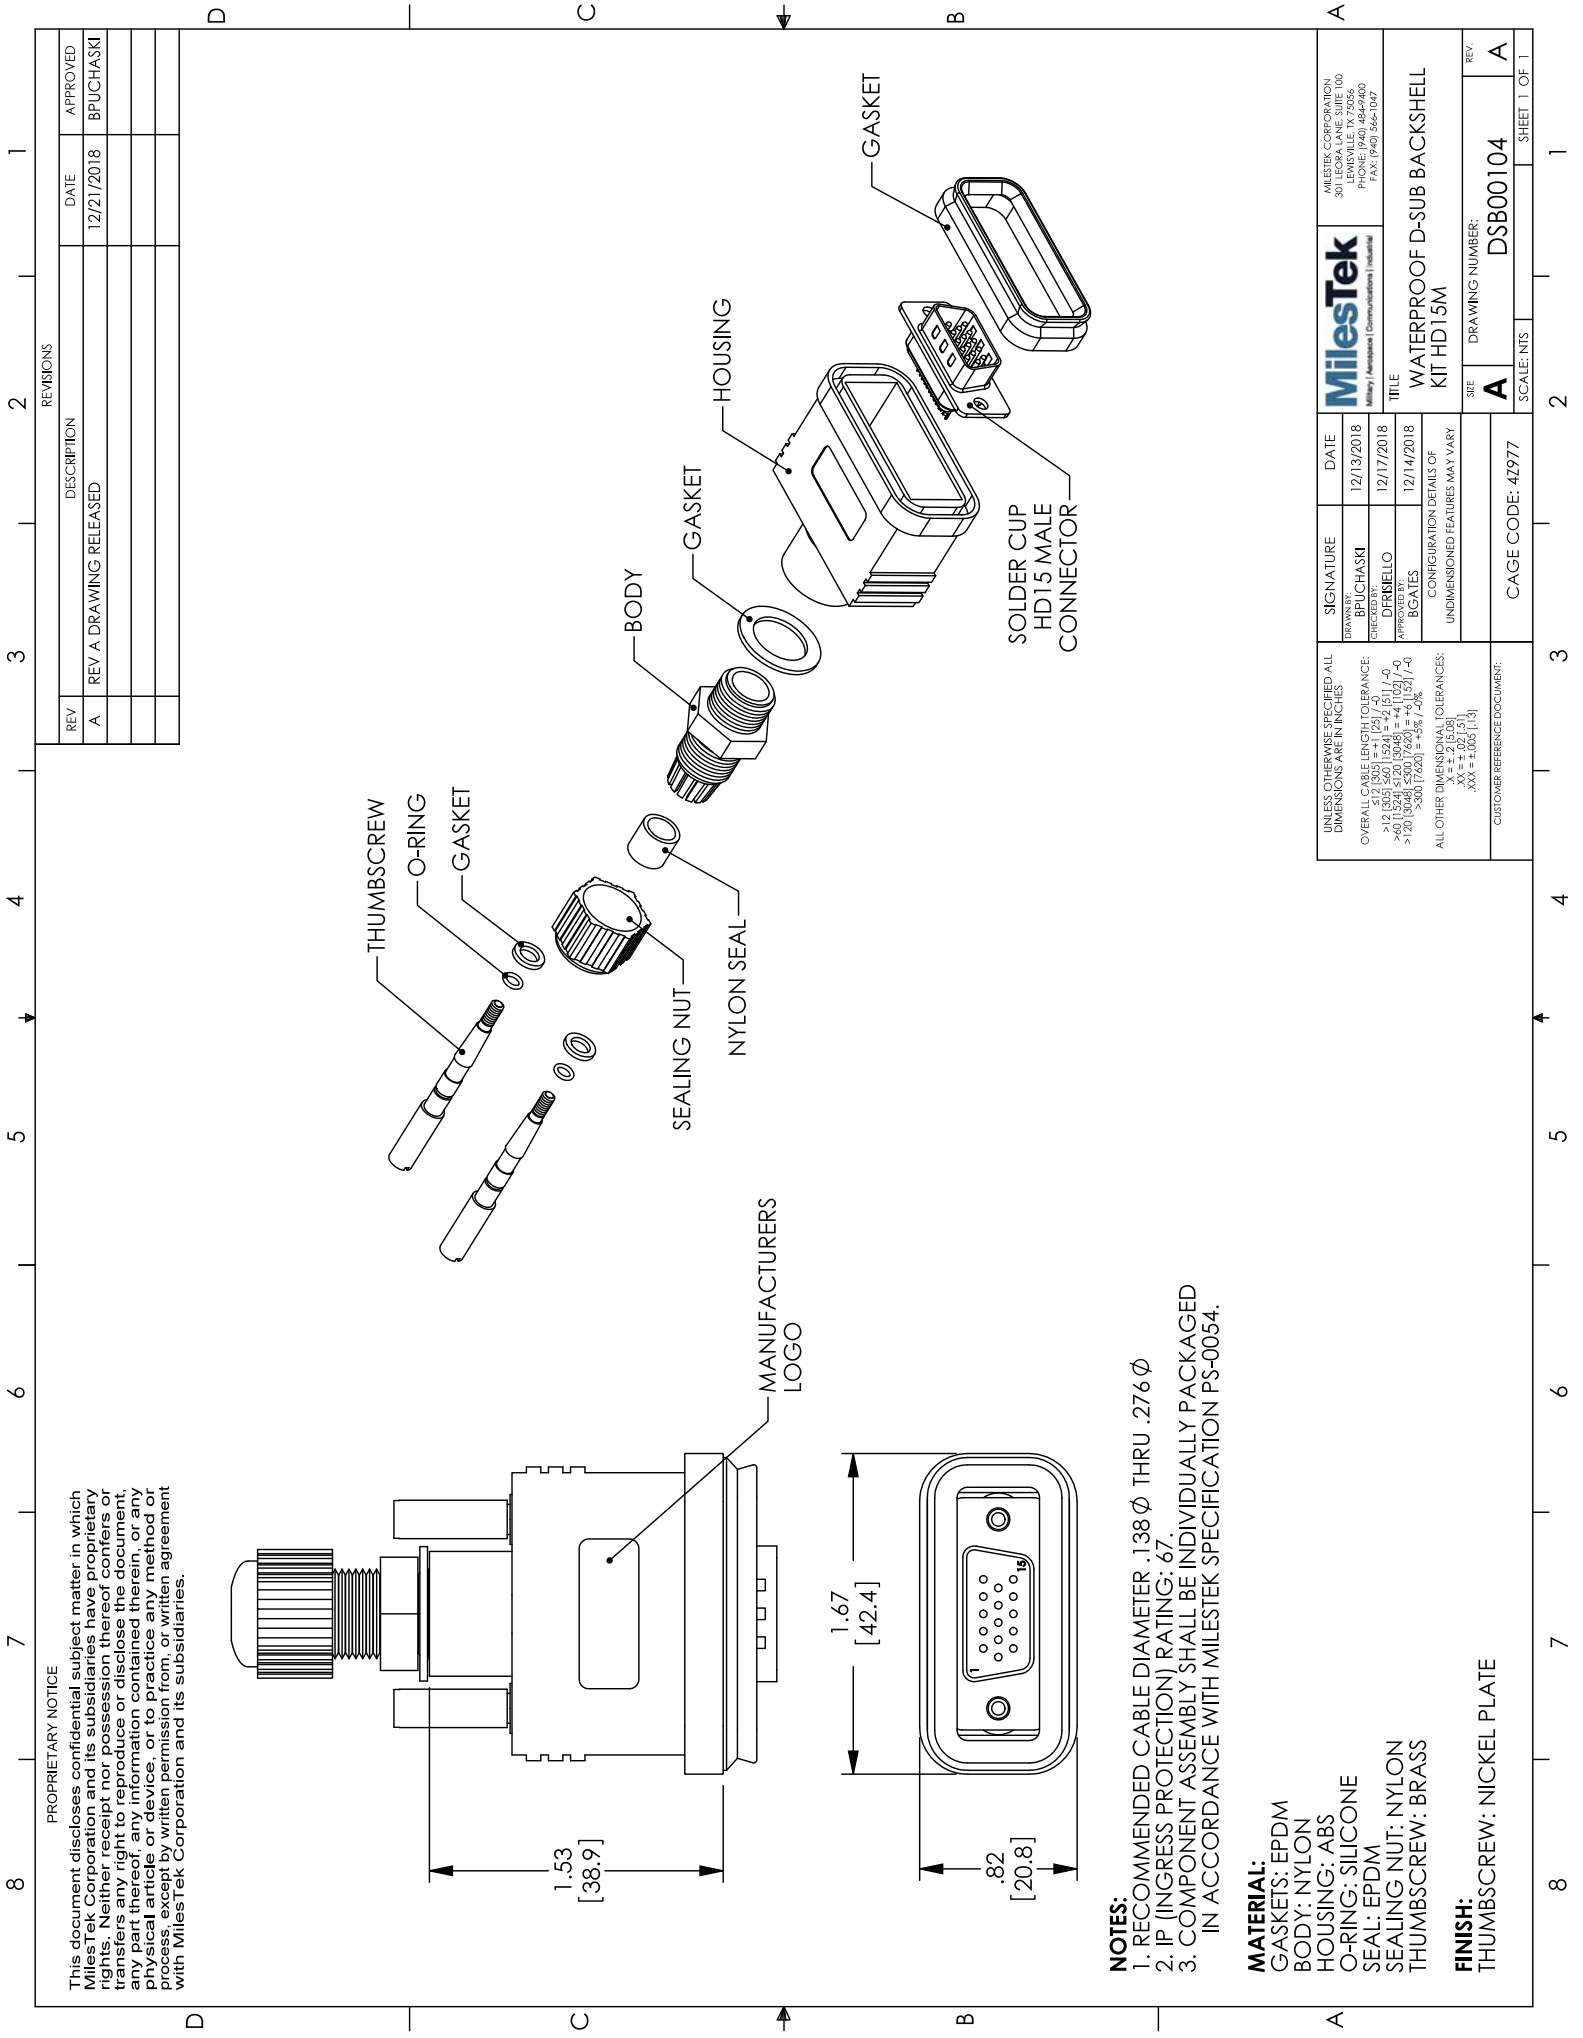

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/21/2018	BPUCHASKI

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SIGNATURE	DATE
DRAWN BY: BPUCHASKI		12/13/2018	
CHECKED BY: DFRNELLO		12/17/2018	
APPROVED BY: BGATES		12/14/2018	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			
OVERALL CABLE LENGTH TOLERANCE:			
>10 [254] = +1 [25] / -0			
>10 [254] <100 [2540] = +1 [10] / -0			
>100 [2540] <500 [12700] = +1 [152] / -0			
>500 [12700] = +5% / -5%			
ALL OTHER DIMENSIONAL TOLERANCES:			
XX = ±.015 [0.38]			
XXX = ±.005 [0.13]			
CUSTOMER REFERENCE DOCUMENT:		CAGE CODE: 42977	
TITLE		SCALE: NTS	REV.
MILESTEK CORPORATION		A	A
301 E. BROADWAY, SUITE 100			
PHOENIX, ARIZONA 85001			
PHONE: (602) 484-4400			
FAX: (602) 564-1047			
MILESTEK			
Military Aerospace Communications Industrial			
WATERPROOF D-SUB BACKSHELL KIT HD15M			
SHEET 1 OF 1			

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilestTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the subject matter, and no part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, or otherwise, without the prior written permission of MilestTek Corporation and its subsidiaries.

NOTES:

1. RECOMMENDED CABLE DIAMETER .138 Ø THRU .276 Ø
2. IP (INGRESS PROTECTION) RATING: 67.
3. COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

MATERIAL:

- GASKETS: EPDM
- BODY: NYLON
- HOUSING: ABS
- O-RING: SILICONE
- SEAL: EPDM
- SEALING NUT: NYLON
- THUMBSCREW: BRASS

FINISH:

- THUMBSCREW: NICKEL PLATE