



PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right, title, or interest in the design, structure, or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.



WIRING TABLE	TERMINAL BLOCK #
DB15 F	
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
GROUND	16

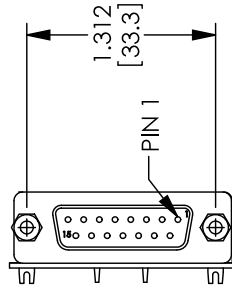

DB15 FEMALE D-SUB CONNECTOR

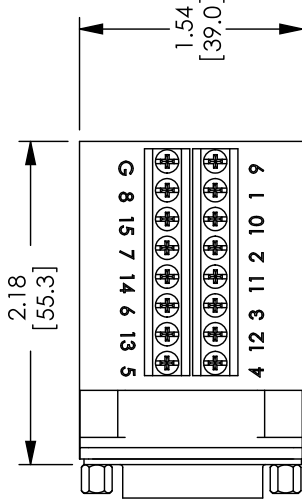

2X, 8 POSITION TERMINAL BLOCK

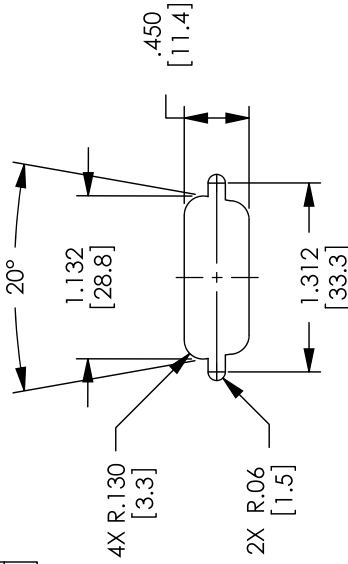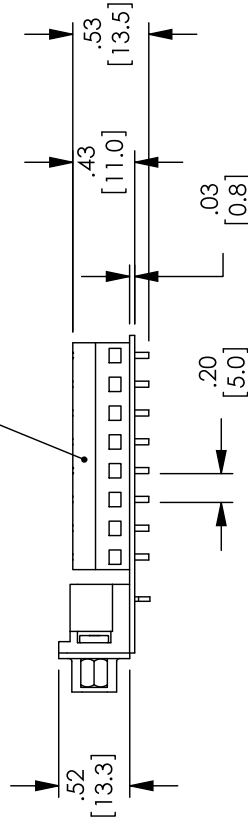

RECOMMENDED PANEL OPENING (MAX PANEL THICKNESS: 0.06")

NOTES:

VOLTAGE RATING: 1000V AC AND 500V DC.

CURRENT RATING: 3 AMPS

COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/21/2018	BPUCHASKI

MilesTek
Military | Aerospace | Communications | Industrial

MILESTEK CORPORATION
301 LENOVA LANE, SUITE 100
LENOVA, INDIANA 46534
PHONE: (940) 484-9400
FAX: (940) 564-1047

DB15 FEMALE CONNECTOR FOR FIELD TERMINATION

SIGNATURE: BPUCHASKI DATE: 12/13/2018
 CHECKED BY: DGUITTAUR DATE: 12/17/2018
 APPROVED BY: BGATES DATE: 12/14/2018

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES:
 >.015 [.375] = +.01 [.25] / -0
 >.015 [.375] < .10 [.2548] = +.01 [.25] / -0
 >.10 [.2548] < .500 [12.702] = +.01 [.25] / -0
 >.500 [12.702] < .500 [12.702] = +.5% / -.5%
 .XXX = ±.005 [0.127]

CUSTOMER REFERENCE DOCUMENT: CAGE CODE: 4Z977

SCALE: NTS DRAWING NUMBER: DSB00108 SHEET 1 OF 1