


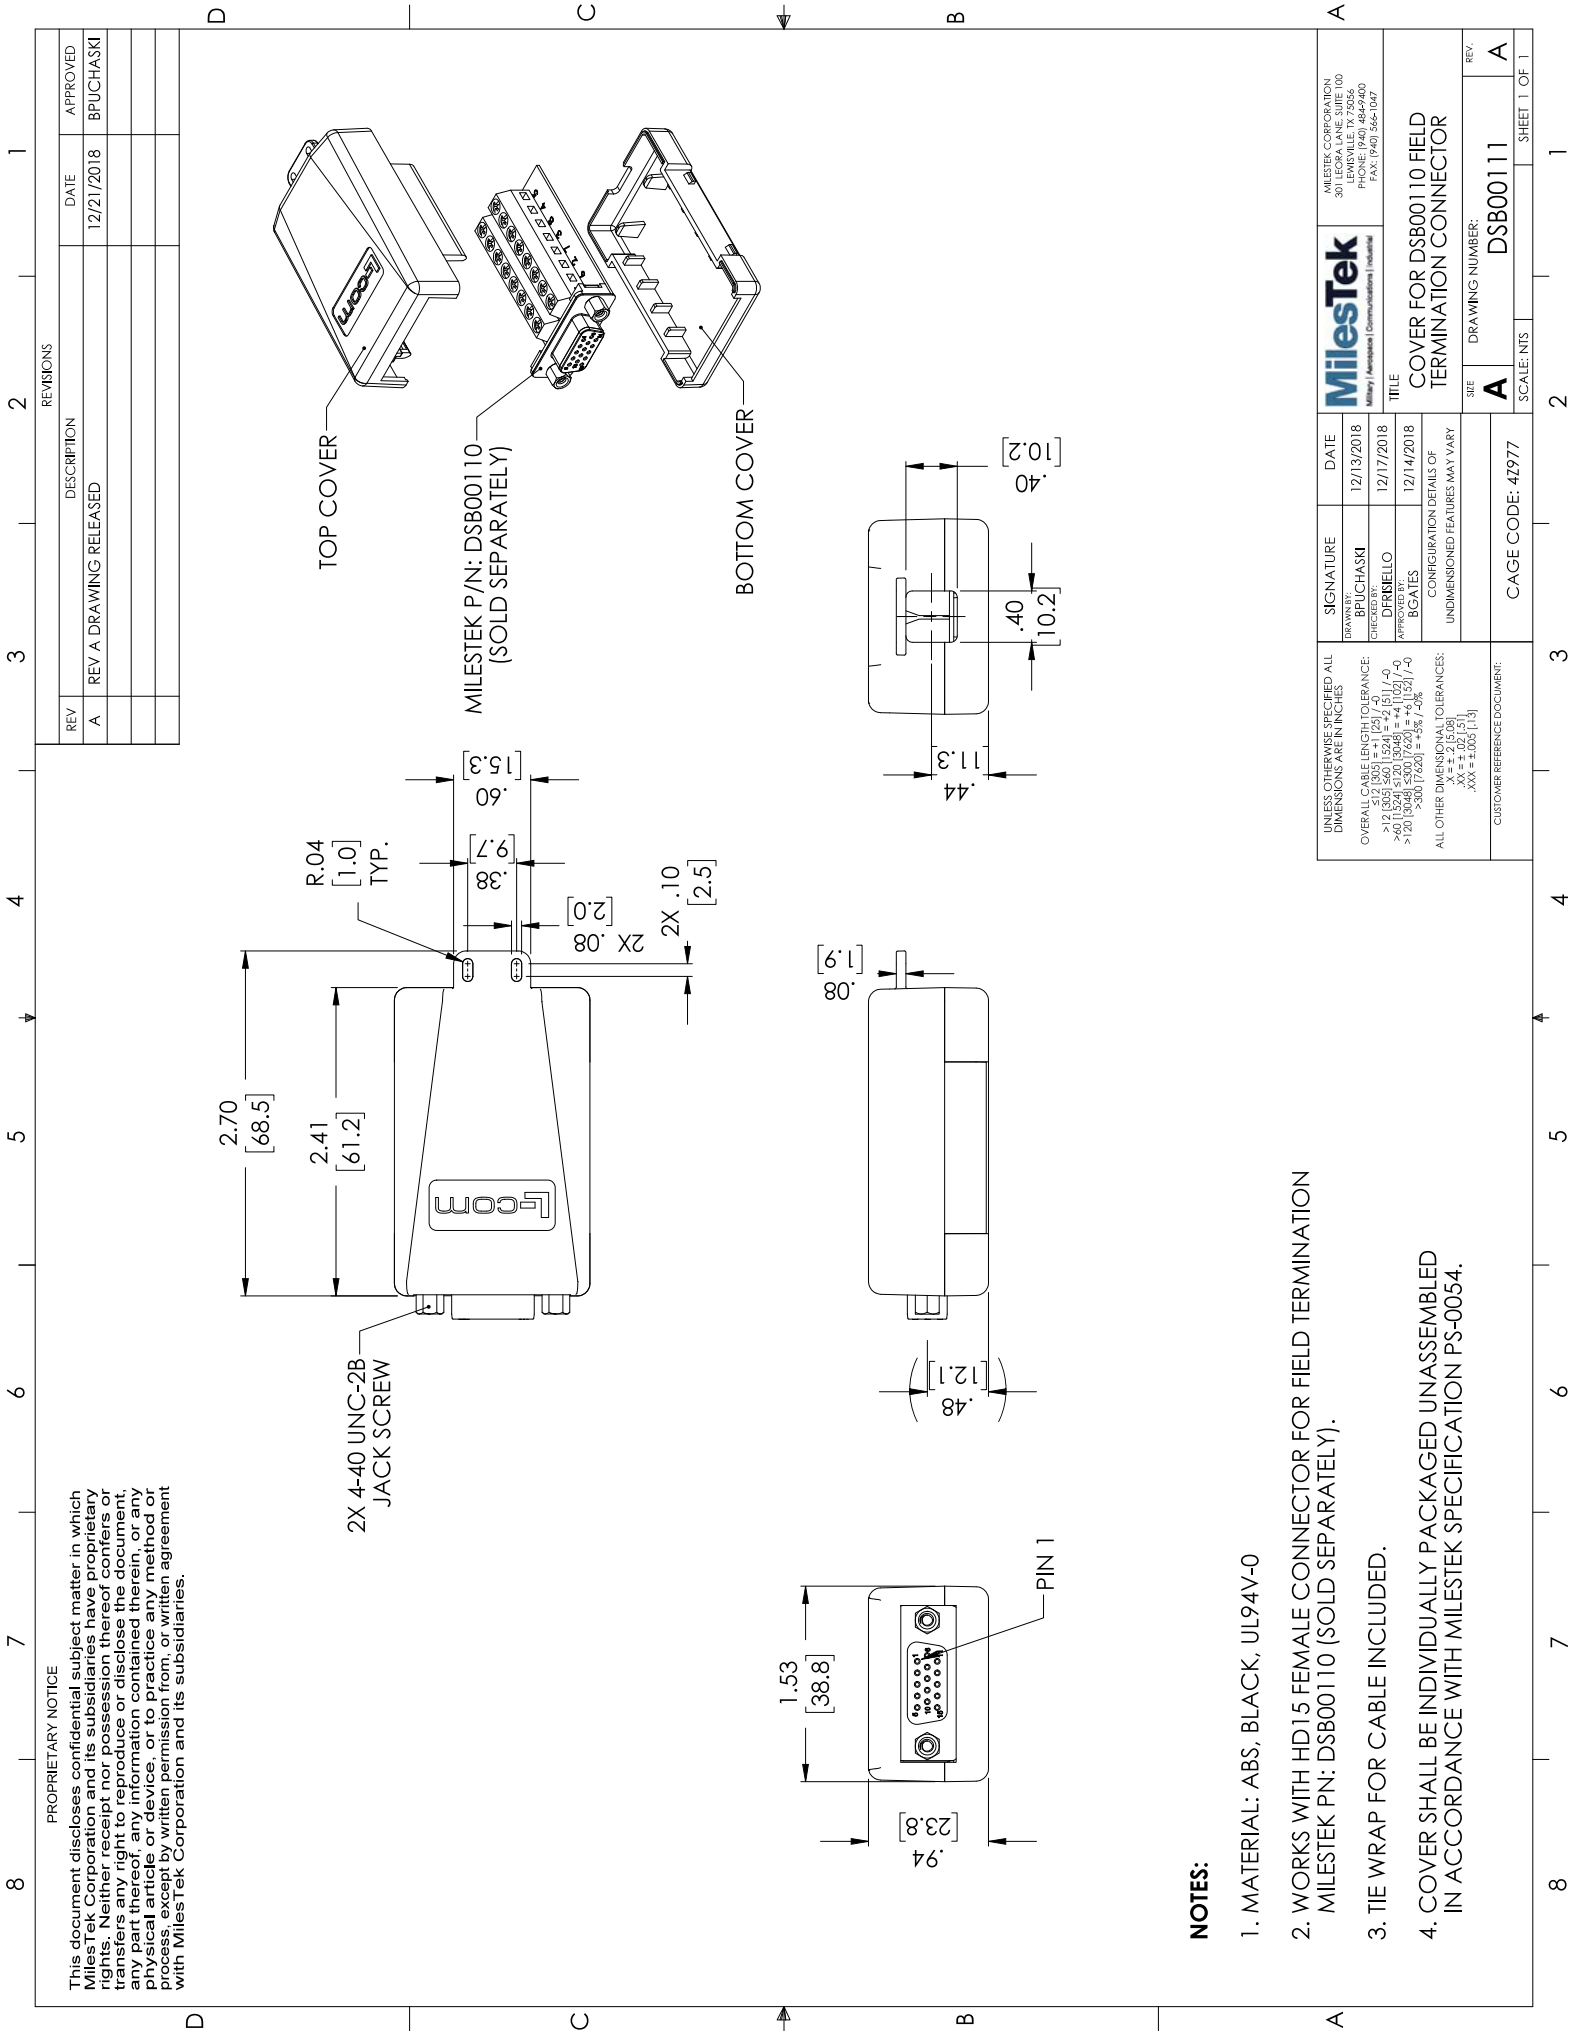

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/21/2018	BPUCHASKI

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE:		BPUCHASKI	12/13/2018
>10 [254] ≤ 20 [508] = ±.125 [3.175]		DPRIELLO	12/17/2018
>20 [508] ≤ 50 [1270] = ±.150 [3.81]		BGATES	12/14/2018
>50 [1270] ≤ 100 [2540] = ±.1875 [4.7625]			
>100 [2540] ≤ 500 [12700] = ±.1875 [4.7625]			
>500 [12700] ≤ 1000 [25400] = ±.1875 [4.7625]			
ALL OTHER DIMENSIONAL TOLERANCES:			
.XXX = ±.005 [0.127]			
.XX = ±.005 [0.127]			
.X = ±.005 [0.127]			

TITLE		MILESTEK CORPORATION	
COVER FOR DSB00110 FIELD TERMINATION CONNECTOR		301 EDWARDS AVE. SUITE 100	
		PHONE: (940) 484-9400	
		FAX: (940) 564-1047	

CAGE CODE: 4Z977		DRAWING NUMBER: DSB00111	

CUSTOMER REFERENCE DOCUMENT:		SCALE: NTS	

SHEET 1 OF 1		REV. A	

NOTES:

1. MATERIAL: ABS, BLACK, UL94V-0
2. WORKS WITH HD15 FEMALE CONNECTOR FOR FIELD TERMINATION MILESTEK PN: DSB00110 (SOLD SEPARATELY).
3. TIE WRAP FOR CABLE INCLUDED.
4. COVER SHALL BE INDIVIDUALLY PACKAGED UNASSEMBLED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.