


NOTES:

1. VOLTAGE RATING: 1000V AC & 500V DC.
2. COMPONENT SHALL BE TESTED FOR CONTINUITY.
3. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPEC. PS-0054.


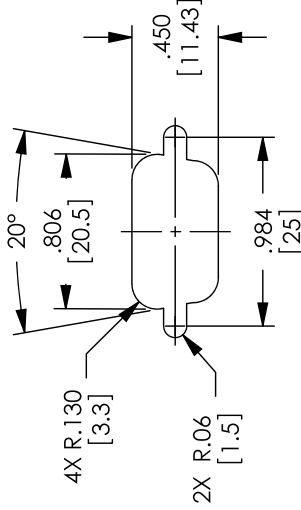



1. VOLTAGE RATING: 1000V AC & 500V DC.

1. VOLTAGE RATING: 1000V AC & 300V DC.
2. COMPONENT SHALL BE TESTED FOR CONTINUITY.
3. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPEC. PS-0054.

— #4-40 UNC-2B X .094 DP.

[4.1]
.160

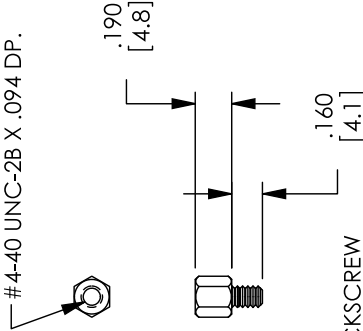

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = + (24) / - 0 ≤ 12 [305] = + (24) / - 0 > 10 [254] = + (24) / - 0 > 10 [254] = + (24) / - 0 > 120 [3048] = + (240) / - 0 > 120 [3048] = + (240) / - 0 > 300 [7620] = + (36) / - 0 > 300 [7620] = + (36) / - 0 ALL OTHER DIMENSIONAL TOLERANCES: X = ± .005 [127] Y = ± .005 [127] Z = ± .005 [127] XXX = ± .005 [127]	SIGNATURE	DATE	 MilesTek Wireless Communications Inc. (Canada)	MILESTEK CORPORATION 301 ENRIQUE, TX 75056 PHONE: (940) 484-9400 FAX: (940) 566-1047
	DRAWN BY: BPUCHASKI	12/13/2018		
CHECKED BY: DPRINELLO	12/13/2018	DB9 MALE CONNECTOR FOR FIELD TERMINATION		
APPROVED BY: BGATES	12/13/2018			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SEE DRAWING NUMBER: A DSB00114 A			
CUSTOMER REQUESTED DOCUMENT:	CAGE CODE: 42977			