



PROPRIETARY NOTICE

This document discloses confidential subject matter in which Milestek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce, distribute, use, or disseminate the information contained herein, in any physical article or device, or to practice any method or process, except by written permission from, or written agreement with Milestek Corporation and its subsidiaries.

WIRING TABLE	
DB15 M	TERMINAL BLOCK #
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
GROUND	G



DB15 MALE D-SUB CONNECTOR

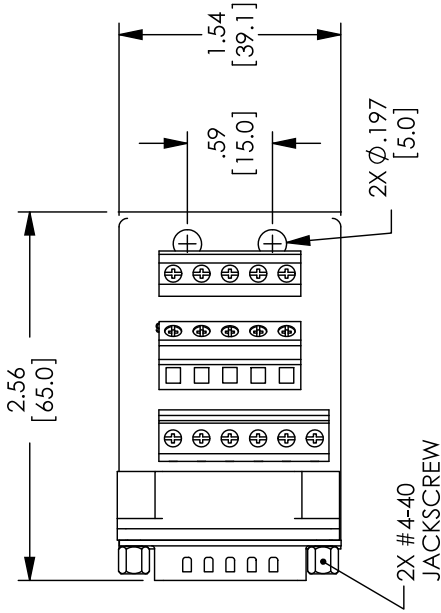



#4-40 UNC-2B X .094 DP.

JACKSCREW DETAIL 2:1


TERMINAL BLOCK, CLAMPING, 6 POSITION

TERMINAL BLOCK, CLAMPING, 5 POSITION, 55° SCREW IN

TERMINAL BLOCK, CLAMPING, 5 POSITION

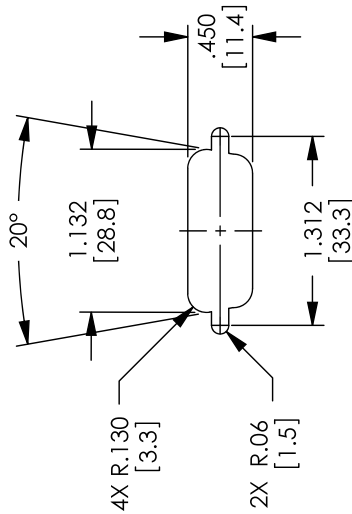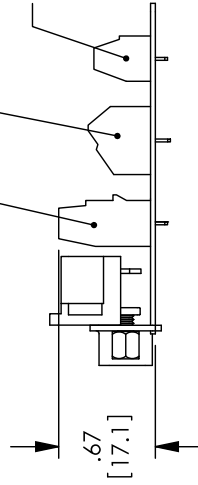

RECOMMENDED PANEL OPENING (MAX PANEL THICKNESS: .06")



REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/20/2018	BPUCHASKI

Milestek
Military | Aerospace | Communications | Industrial

MILESTEK CORPORATION
3011 KENYON AVE., SUITE 100
MILWAUKEE, WI 53212
PHONE: (940) 484-9400
FAX: (940) 564-1047

DB15 MALE CONNECTOR FOR FIELD TERMINATION

SIGNATURE: BPUCHASKI DATE: 12/14/2018
 CHECKED BY: DFRIBELLO DATE: 12/17/2018
 APPROVED BY: BGATES DATE: 12/14/2018

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES:
 OVERALL CABLE LENGTH TOLERANCE:
 >10 [254] <10 [25] / ±.01 [0.25]
 >10 [254] <10 [25] / ±.01 [0.25]
 >120 [3048] <120 [3048] / ±.1 [2.54]
 >120 [3048] <120 [3048] / ±.1 [2.54]
 >120 [3048] <120 [3048] / ±.1 [2.54]
 >120 [3048] <120 [3048] / ±.1 [2.54]

ALL OTHER DIMENSIONAL TOLERANCES:
 .XX = ±.005 [0.125]
 .XXX = ±.002 [0.051]
 .XXX = ±.002 [0.051]

CAGE CODE: 42977

DRAWING NUMBER: DSB00116

SCALE: NTS

SHEET 1 OF 1

- NOTES:**
- VOLTAGE RATING: 1000V AC & 500V DC.
 - COMPONENT SHALL BE TESTED FOR CONTINUITY.
 - COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPEC. PS-0054.