

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/20/2018	BP/UCHASKI

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/20/2018	BP/UCHASKI

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/20/2018	BP/UCHASKI


REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/20/2018	BP/UCHASKI

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/20/2018	BP/UCHASKI

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/20/2018	BP/UCHASKI

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/20/2018	BP/UCHASKI

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	06/20/2018	BP/UCHASKI

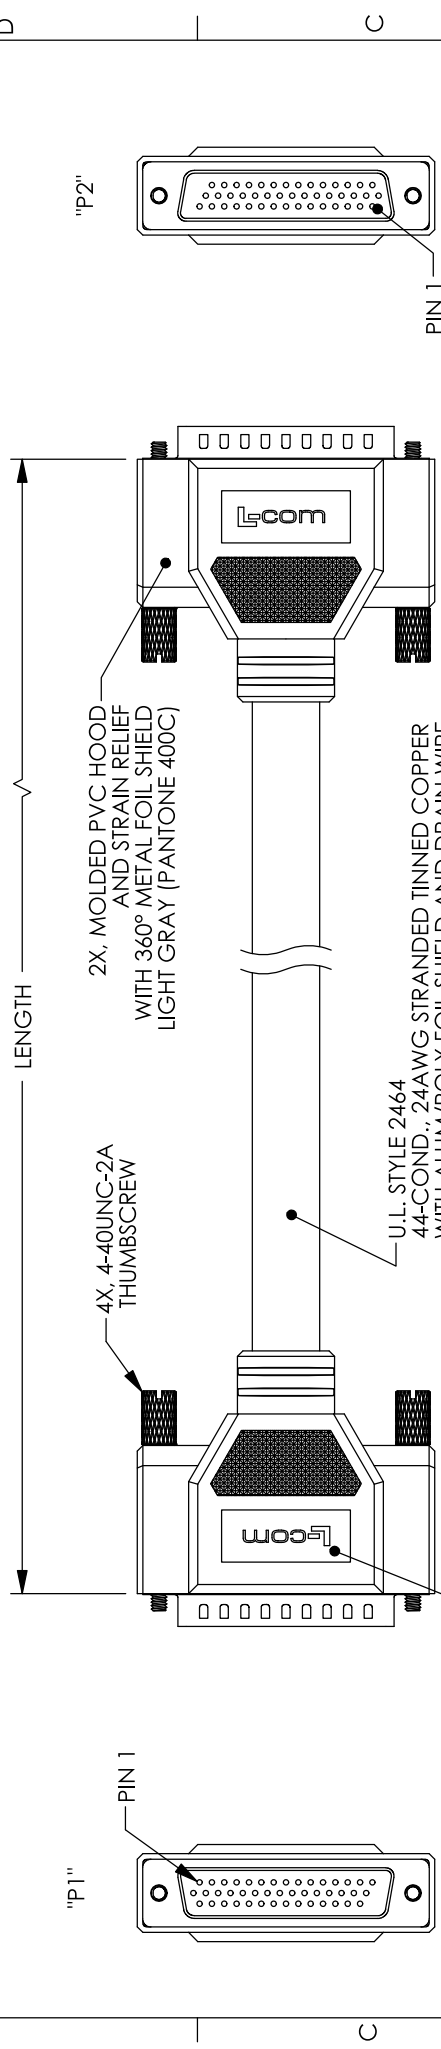

"P1"

"P2"

PIN 1

2X MALE 44-PIN HIGH DENSITY D-SUB CONNECTOR

2X, MOLDED PVC HOOD AND STRAIN RELIEF WITH 360° METAL FOIL SHIELD LIGHT GRAY (PANTONE 400C)

U.L. STYLE 2464 44-COND., 24AWG STRANDED TINNED COPPER WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE PLUS TINNED COPPER BRAID SHIELD. JACKET: PVC, LIGHT GRAY (PANTONE 400C)

4X, 4-40UNC-2A THUMBSCREW

2X, L-COM LOGO BOTH SIDES

INTERNAL 360° FOIL SHIELDS IN CONNECTOR HOODS CONNECTED TO CABLE DRAIN WIRE AND CONNECTOR FRAMES.

CONNECTOR PINS: GOLD PLATED.

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

MODEL NUMBER	LENGTH FEET	METERS
HAD00005-1F	1.0	0.31
HAD00005-205F	2.5	0.76
HAD00005-5F	5.0	1.52
HAD00005-10F	10.0	3.05
HAD00005-15F	15.0	4.57
HAD00005-25F	25.0	7.62
HAD00005-50F	50.0	15.24

"P1"	"P2"	COLOR	"P1"	"P2"	COLOR
1	1	WHITE	23	23	ORANGE / BLACK
2	2	BLACK	24	24	PINK / RED
3	3	RED	25	25	GRAY / RED
4	4	GREEN	26	26	GREEN / WHITE
5	5	YELLOW	27	27	YELLOW / RED
6	6	BROWN	28	28	BLUE
7	7	ORANGE	29	29	WHITE / RED
8	8	GRAY	30	30	RED / WHITE
9	9	PURPLE	31	31	LIGHT GREEN / BLACK
10	10	PINK	32	32	PINK / YELLOW
11	11	LIGHT BLUE	33	33	GRAY / YELLOW
12	12	LIGHT GREEN	34	34	WHITE / YELLOW
13	13	PURPLE / WHITE	35	35	GREEN / BLUE
14	14	LIGHT BLUE / BLACK	36	36	YELLOW / BLUE
15	15	LIGHT BLUE / RED	37	37	RED / BLUE
16	16	WHITE / BLACK	38	38	LIGHT GREEN / BLUE
17	17	RED / BLACK	39	39	YELLOW / BLACK
18	18	BROWN / WHITE	40	40	LIGHT BLUE / BLUE
19	19	PINK / BLACK	41	41	PINK / BLUE
20	20	GRAY / BLACK	42	42	GRAY / BLUE
21	21	GREEN / BLACK	43	43	WHITE / BLUE
22	22	BLUE / WHITE	44	44	LIGHT GREEN / RED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >12" (305) 560 (1524) = ±0.51 / -0 >120" (3048) 5320 (13720) = ±0.152 / -0 >300" (7620) = ±0.5% / -0%	D. FRISIELLO	06/14/2018
ALL OTHER DIMENSIONAL TOLERANCES: X = ± 0.15 (38) XX = ± 0.03 (0.76) XXX = ± 0.003 (0.076)	J. LABOY	06/14/2018
CUSTOMER REFERENCE DOCUMENT:	B. GATES	6/14/18
	APPROVED MANUFACTURING:	
	CUSTOMER APPROVAL:	

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY

DASH	NEXT ASSY	USED ON	APPLICATION	CAGE CODE: 42977	DRAWING NUMBER: HAD00005	SHEET 1 OF 1

SCALE: NTS	DRAWING NUMBER:	SHEET 1 OF 1
	HAD00005	

Milestek
MILESTEK CORPORATION
301 BROADWAY, SUITE 100
ROSELAND, NJ 07068
PHONE: (940) 484-4400
FAX: (940) 564-1047

TITLE
DELUXE, HD44M/M MOLDED

PROPRIETARY NOTICE
This document discloses confidential subject matter in which Milestek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any rights, title, or interest in the design, or any part thereof, or any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with Milestek Corporation and its subsidiaries.