



| MODEL NO. | LENGTH |
|--------------------|-----------|
| CBL-USB2-2824-100 | 100 FEET |
| CBL-USB2-2824-500 | 500 FEET |
| CBL-USB2-2824-1000 | 1000 FEET |

USB BULK CABLE SPECIFICATION



| | | Twisted Pair | Conductors |
|-------------|---|--------------------------|--------------------------|
| CONDUCTORS | CONDUCTOR SIZE, IN [MM] | 28AWG 7X .005 [7X .127] | 24AWG 7X .008 [7X .2] |
| | MATERIAL | TINNED COPPER STRANDED | TINNED COPPER STRANDED |
| INSULATION | MATERIAL | POLYOLEFIN | SR-PVC |
| | DIAMETER, IN [MM] | .030 ± .003 [.76 ± .08] | .043 ± .003 [1.10 ± .08] |
| JACKET | MATERIAL | PVC | |
| | DIAMETER, IN [MM] | .177 ± .006 [4.5 ± 0.15] | |
| | COLOR | BLACK | |
| FOIL SHIELD | MATERIAL | ALUMINUM MYLAR | |
| | COVERAGE | 125% | |
| BRAID | MATERIAL | TINNED COPPER | |
| | COVERAGE | 65% | |
| DRAIN WIRE | CONDUCTOR SIZE, IN [MM] | 28AWG 7X .005 [7X .127] | |
| | MATERIAL | TINNED COPPER STRANDED | |
| MARKING | L-COM  AWM 2725 60°C 30V VW-1 USB CABLE REV. 2.0 28AWG/1P 24AWG/2C Exxxxx | | |
| | COLOR | WHITE | |

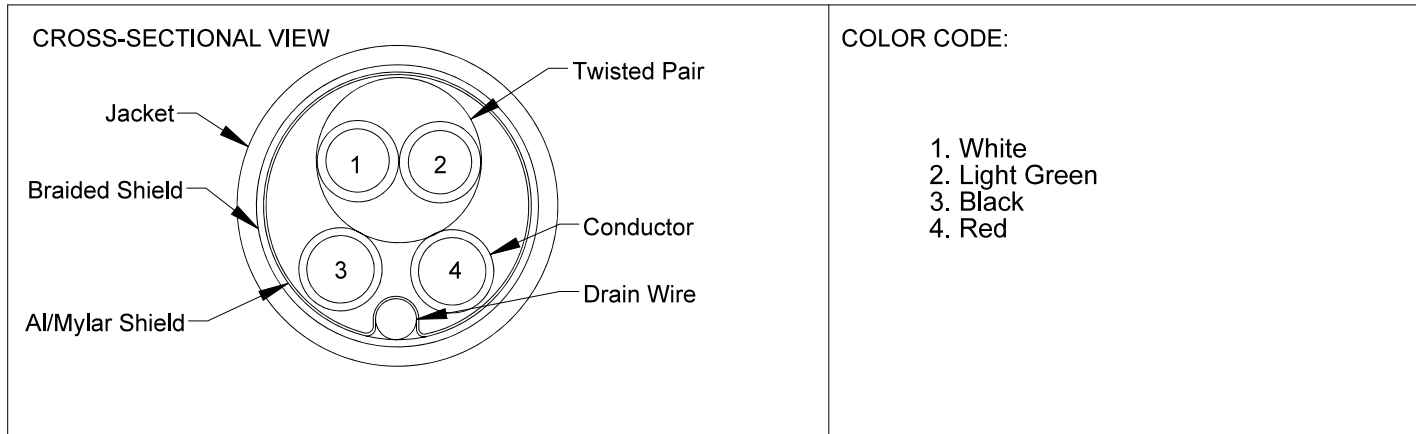

ELECTRICAL PROPERTIES

| | |
|----------------------|---|
| VOLTAGE RATING | 30V |
| TEMPERATURE RATING | 60°C |
| CONDUCTOR RESISTANCE | 28AWG: 237 OHMS/KM AT 20°C MAX 24AWG: 93 OHMS/KM AT 20°C MAX |

CABLE TO BE RoHS COMPLIANT