


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/15/2019	DFRIBELLO

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MiletTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right, title, or interest in the subject matter, and any use, reproduction, or disclosure of the information contained herein, in any form, by any means, without the prior written permission of MiletTek Corporation is strictly prohibited. The information contained herein is for internal use only and is not to be distributed outside of MiletTek Corporation or its subsidiaries, except by written permission from, or written agreement with MiletTek Corporation and its subsidiaries.

SECTION A-A

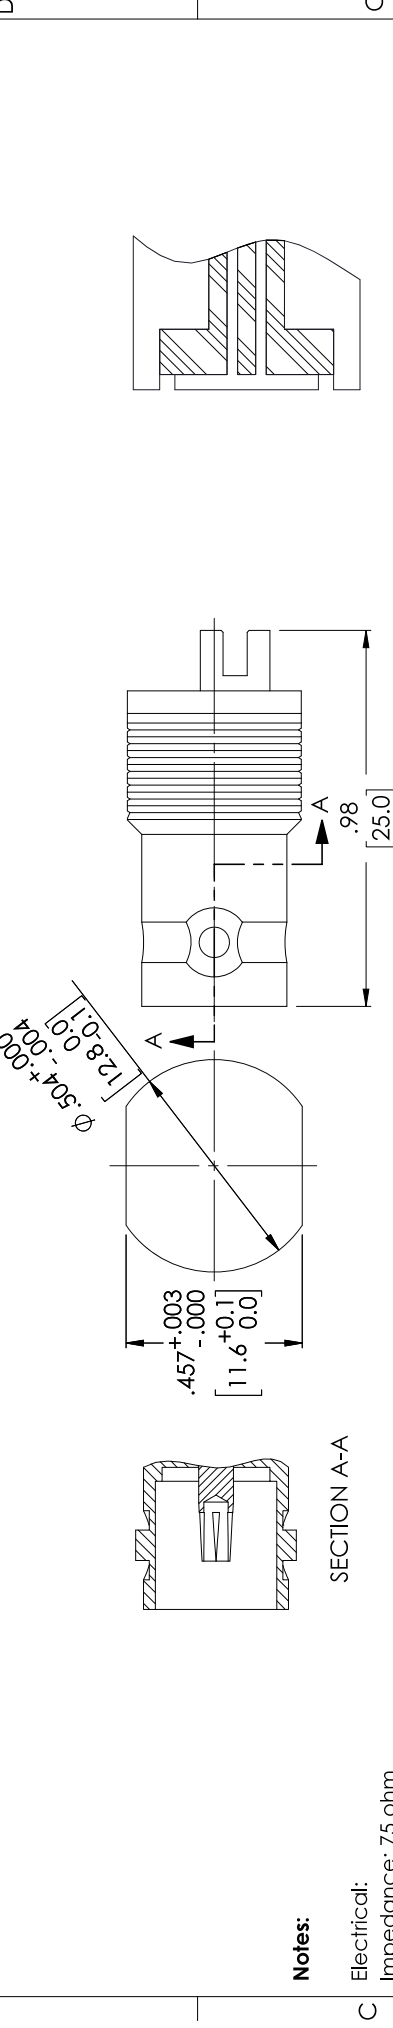

Notes:

Electrical:
 Impedance: 75 ohm
 Frequency Range: 0~12 GHz.
 Voltage Rating: ≥500 V rms
 (depending on cable)
 Insulator Resistance: ≥5 GΩ
 Dielectric Withstanding Voltage: 1500 V rms.
 Contact Resistance: Center Contact ≤ 1.5mΩ.
 Outer Contact ≤ 1mΩ

VSWR: ≤ 1.3

Environmental:
 Temperature Range: -65a to 165a
 Corrosion(Salt Spray): MIL-STD-202, Method 101, Cond. C

Thermal Shock: MIL-STD-202, Method 107, Cond. B

Mechanical: MIL-STD-202, Method 213, Cond. G

Vibration: MIL-STD-202, Method 204, Cond. B

PACKAGING:
 CONNECTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

	PACKAGING: CONNECTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPECIFICATION PS-0054.
--	---