

8

7

6

5

4

3

2

1

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/12/17	J.YOU

MDA00045

A

2X 4-40 UNC-2A METAL THUMBSCREW

LENGTH

MOLDED HOOD, LSZH, BLACK

MOLDED HOOD, LSZH, BLACK

PIN 1

2X 4-40 UNC-2A THUMBSCREW

"P1"


PIN 1

"P2"

2X MALE DVI-D DUAL LINK CONNECTOR

UL STYLE 21100,
 (7) SHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
 (1) UNSHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
 (3) CONDUCTORS, 28AWG, STRANDED TINNED COPPER,
 SHIELDING(BRAIDED): 36AWG TINNED COPPER
 SHIELDING: ALUMINUM/POLYESTER
 OUTER JACKET: LOW SMOKE ZERO HALOGEN, BLACK

P1 WIRING MAP P2

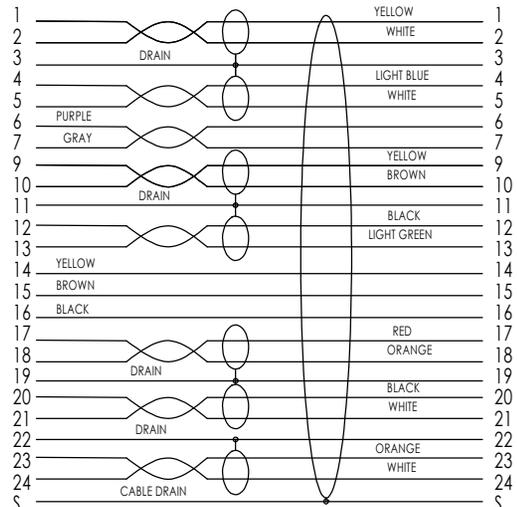

PIN 8: NO CONNECTION

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPECIFICATION PS-0054.
3. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

MODEL NUMBER	LENGTH	
	FEET	METERS
MDA00045-1F	1.0	.31
MDA00045-3F	3.0	.91
MDA00045-5F	5.0	1.52
MDA00045-10F	10.0	3.05
MDA00045-15F	15.0	4.57

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
DASH	NEXT ASSY	USED ON	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE	 MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086
			OVERALL CABLE LENGTH TOLERANCES: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: $.X = \pm 2$ [5.08] $.XX = \pm .02$ [51] $.XXX = \pm .005$ [13]	DRAWN BY: J.YOU CHECKED BY: B.GATES APPROVED ENGINEERING: S.PAN APPROVED MANUFACTURING: CUSTOMER APPROVAL:	06/12/17 06/12/17 06/12/17	
APPLICATION			CUSTOMER REFERENCE DOCUMENT:	CAGE CODE: 42977	SCALE: NTS	TITLE CA-DVI DL M/M RA LFT EXIT LSZH DRAWING NUMBER: MDA00045 SHEET 1 OF 1

8

7

6

5

4

3

2

1