

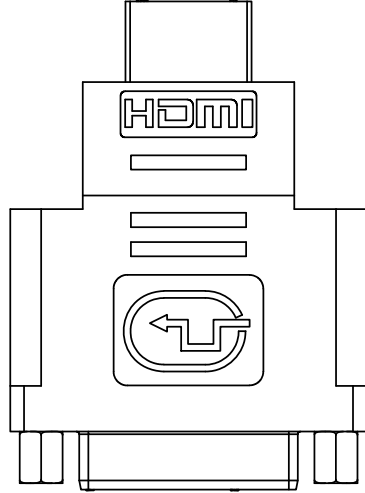


**PROPRIETARY NOTICE**

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or warrants that any information contained therein or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

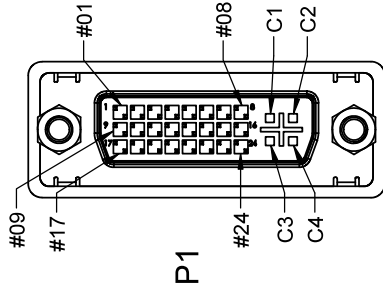

**PIN OUT**

P1	P2	P1	P2
1	1	16	16
2	2	17	17
3	3	18	18
4	4	19	19
5	5	20	20
6	6	21	21
7	7	22	22
8	8	23	23
9	9	24	24
10	10	C1	C1
11	11	C2	C2
12	12	C3	C3
13	13	C4	C4
14	14	C5	C5
15	15	S	S

**NOTES:**

ADAPTER SHALL BE TESTED FOR CONTINUITY.  
NO OPENS/SHORTS, MISWIRING OR INTERMITTENT FAILURES.

VOLTAGE TEST: DC 300V 10MS  
INSULATION RESISTANCE: 5.0M OHM / MIN.  
CONDUCTOR RESISTANCE: 5.0 OHM / MAX.

ADAPTER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

**REGULATORY COMPLIANCE:**

CE2011/65/EU (RoHS DIRECTIVE)

MDIC00003	A
-----------	---

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/16/18	B.PUCHASKI

**NON CONTROLLED DRAWING IF PRINTED**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >12 (305) 560 (1424) = +.0 (0) / -0 >120 (3048) 5320 (13620) = +.0 (0) / -0 >300 (7620) = +.5% / -0%		B.PUCHASKI	05/09/18
ALL OTHER DIMENSIONAL TOLERANCES: X = ± .125 (3.175) Y = ± .125 (3.175) XXX = ± .003 (0.0762)		J.JAROVY	05/09/18
CUSTOMER REFERENCE DOCUMENT:		APPROVED BY:	TITLE
		B.GATES	ADPTR DV124+5 M TO HDMI M
		CUSTOMER APPROVAL	
DASH	NEXT ASSY	USED ON	
		APPLICATION	
CAGE CODE: 42977		MilesTek MilesTek Corporation	
DRAWING NUMBER: MDIC00003		MILESTEK CORPORATION 301 BROADWAY, SUITE 100 PHOENIX, AZ 85004 PHONE: (949) 484-4400 FAX: (949) 564-1047	
SCALE: NTS		SHEET 1 OF 1	