



PROPRIETARY NOTICE
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the contents or any part thereof, and any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REV	INITIALS	DESCRIPTION	DATE	APPROVED
1		INITIAL RELEASE	5/4/18	D.FRISIELLO
MMIA00004				

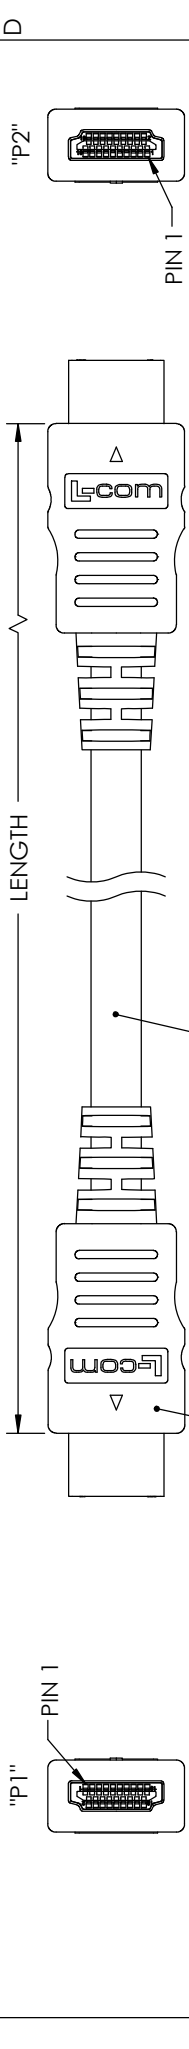

2X, OVERMOLDED HOOD, PVC, RED(PANTONE 193C)

UL STYLE 20276, HIGH FLEX HDMI CABLE
 (5) INDIVIDUALLY SHIELDED TWISTED PAIRS, 28AWG, WITH DRAIN WIRE,
 (4) INDIVIDUAL CONDUCTORS, 28AWG,
 OVERALL SHIELD: ALUMINIUM MYLAR PLUS BRAIDED TINNED COPPER,
 OUTER JACKET: PVC, BLACK
 (NOM. OD 7.3mm; CABLE IS RATED FOR 10,000 BEND CYCLES, MINIMUM)

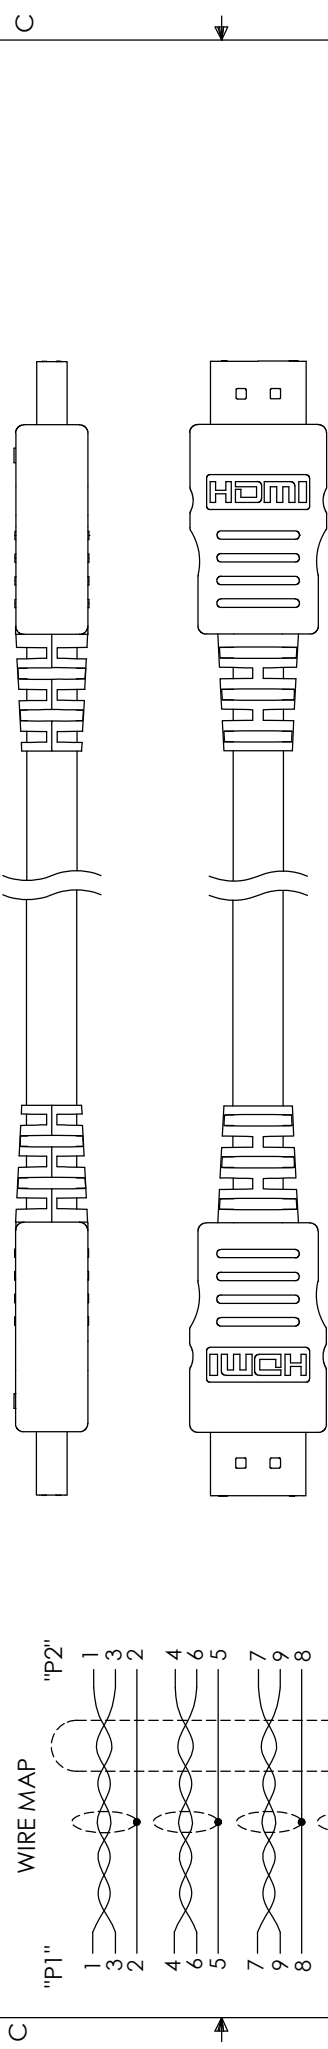

PART NUMBER	LENGTH	
	METERS	FEET
MMIA00004-05M	0.5	1.64
MMIA00004-1M	1.0	3.28
MMIA00004-2M	2.0	6.56
MMIA00004-3M	3.0	9.84

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: $SIZ (305) SIZ (1524) = +0.01 / -0$ $>12 (305) SIZ (1524) = +0.01 / -0$ $>20 (305) SIZ (1524) = +0.01 / -0$ $>30 (305) SIZ (1524) = +0.01 / -0$ $>300 (7620) = +3% / -0%$ ALL OTHER DIMENSIONAL TOLERANCES: .X ± .015 (0.38) .XX ± .003 (0.076) .XXX ± .003 (0.076)	SIGNATURE	DATE	MILESTEK CORPORATION 3010 W. WILSON AVE. SUITE 100 WILSONVILLE, OR 97158 PHONE: (941) 484-4400 FAX: (941) 566-0487
	DRAWN BY: D.FRISIELLO	5/4/18	
	CHECKED BY: E.LAMONT	5/4/18	
	APPROVED BY: B.GATES	5/4/18	
CUSTOMER REFERENCE DOCUMENT:		CAGE CODE: 42977	TITLE HDMI MALE TO MALE HI FLEX CABLE
DASH NEXT ASSY USED ON APPLICATION		SEE DRAWING NUMBER: MMIA00004	
CUSTOMER REFERENCE DOCUMENT:			SCALE: NTS
APPLICATION			SHEET 1 OF 1

- NOTES:**
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.
 - DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).
- REGULATORY COMPLIANCE:**
 CE2011/65/EU(RoHS DIRECTIVE)